



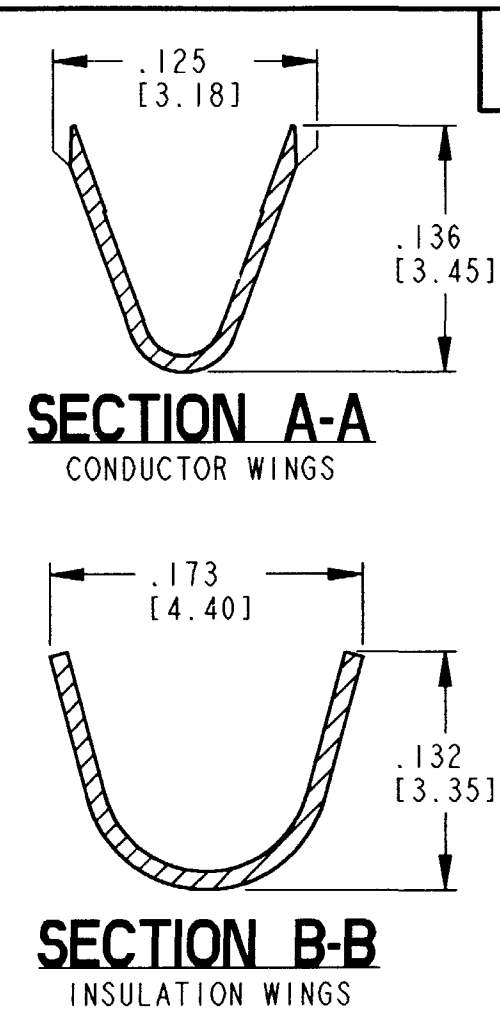

REV E	1060-20-01 * *	REVISIONS			
		SYM	DESCRIPTION	DATE	APPROVED
		B	REVISED PER E.O. PI7913	11-1-02	R.D.R.
		C	REVISED PER E.O. PI8438	12-19-03	R.D.R.
		D	REVISED PER E.O. P20044	11-3-08	R.D.R.
		E	REVISED PER E.O. P20392	12-3-09	RDR

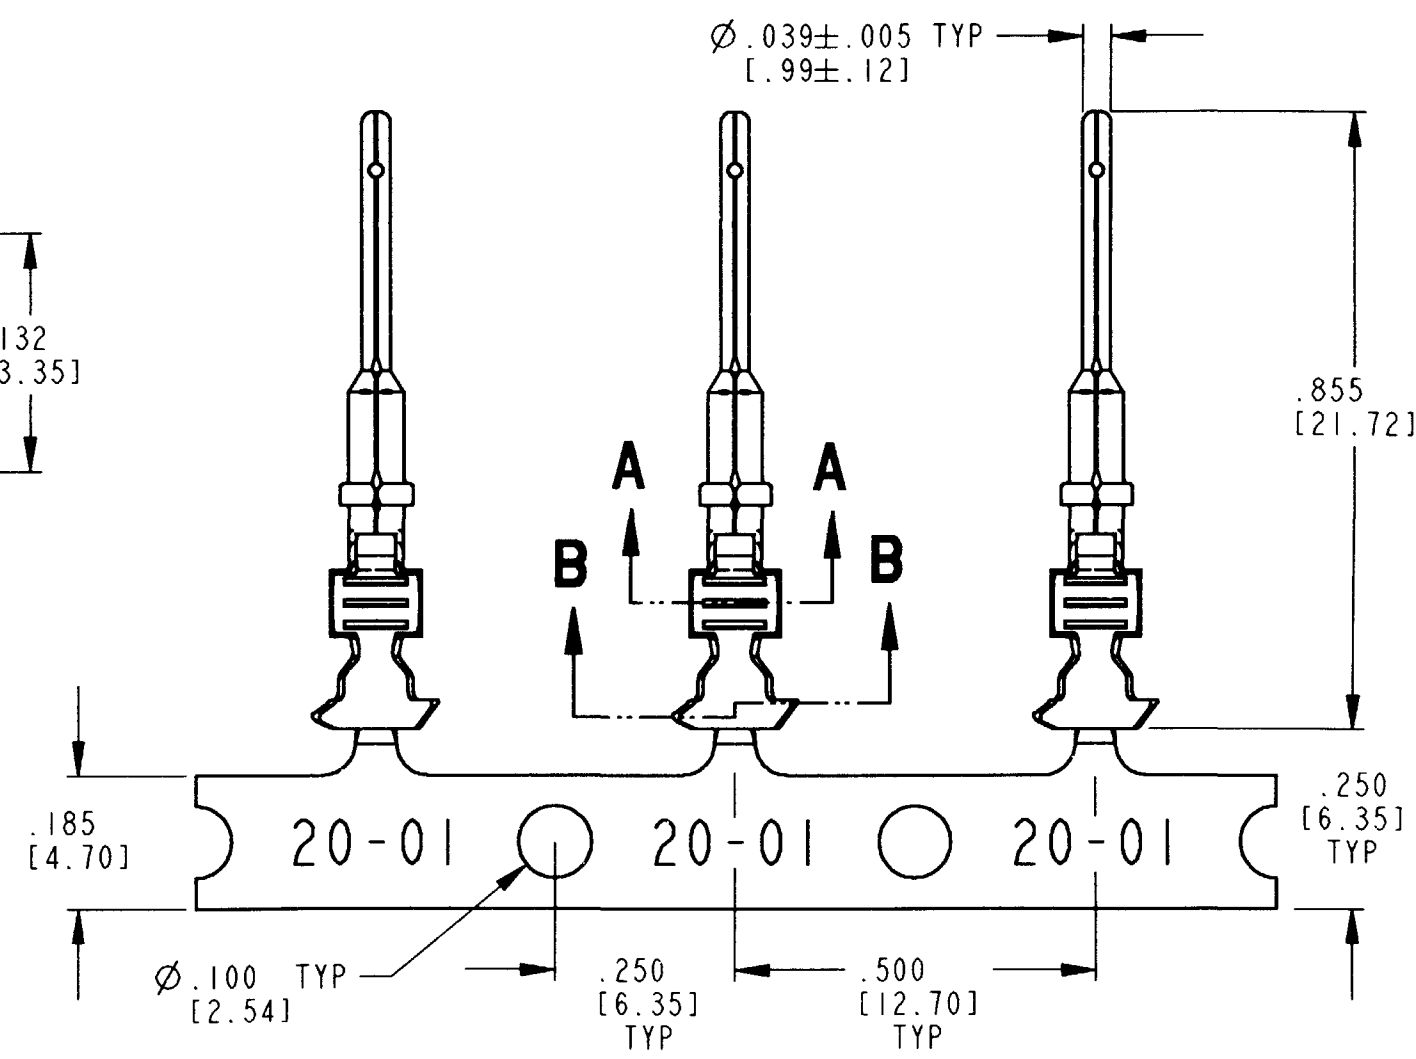

7. MATERIAL: COPPER ALLOY.
6. WHEN ** = 22 PLATING IS NICKEL.
 ** = 44 PLATING IS GOLD.
 ** = 77 PLATING IS TIN.
5. SEE 0425-015-0000 FOR CONTACT PERFORMANCE AND
WIRE APPLICATION CHARACTERISTICS.
4. THIS CONTACT MAY BE CRIMPED WITH DCT20-02-00 AUTOMATIC
DIE OR DTT-20-00 HAND TOOL. SEE DRAWING 0425-207-0000
FOR APPLICABLE WIRE SIZE, INSULATION DIAMETER RANGE,
AND CRIMPING INFORMATION.
3. ONE REEL CONTAINS APPROXIMATELY 4000 CONTACTS.
2. DIMENSIONAL TOLERANCE: $\pm .025$ [0.63].
1. DIMENSIONS ARE IN INCHES [mm].

NOTES: UNLESS OTHERWISE SPECIFIED

SIGNATURE & DATE		STAMPED CONTACT PIN SIZE 20 ENVELOPE	EP		MATL. CODE	
DR	J. APOSTOL 01DEC2009		 3850 INDUSTRIAL AVE. HEMET, CA 92545 DEUTSCH INDUSTRIAL			
CHK	DMay 12/2/09					
PE	DMay 12/2/09					
APPD	P. Reed 12-3-09		B	1060-20-01 * *		
SCALE	NONE	WT	DWG 12	CODE 539	SHEET OF	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

[1060-20-0122](#) [1060-20-0144](#) [1060-20-0122 \(Cut Strip\)](#) [1060-20-0144 \(Cut Strip\)](#) [1060-20-0122 \(Mouser Reel\)](#) [1060-20-0144 \(Mouser Reel\)](#) [1060-20-0122 \(Loose Piece\)](#) [1060-20-0144 \(Loose Piece\)](#)