


PANDUIT PART NO.	DESCRIPTION	WEIGHT
CJ64XXXXXX	6 POSITION, 4 WIRE TERMINATION CAP	1.62 lb/100 PCS. (.738 g/100 PCS.)
CJ66XXXXXX	6 POSITION, 6 WIRE TERMINATION CAP	1.62 lb/100 PCS. (.738 g/100 PCS.)
CJ66UXXXXXX	6 POSITION, 6 WIRE MODULAR JACK TERMINATION CAP IS COLOR CODED FOR USOC WIRING SCHEME	1.62 lb/100 PCS. (.738 g/100 PCS.)

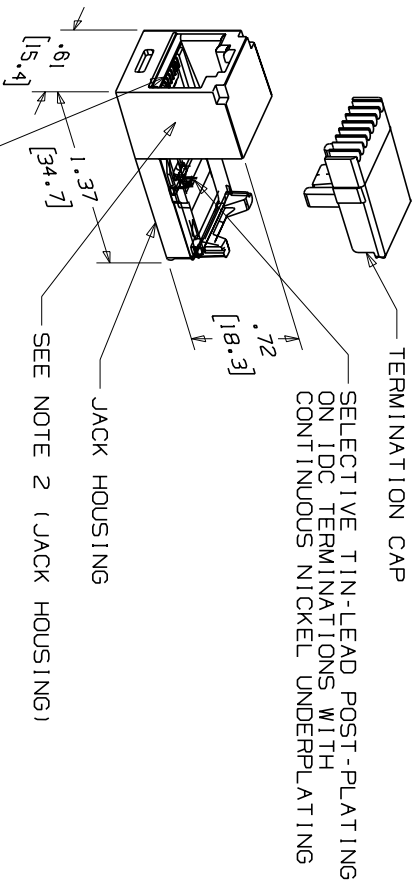

- NOTE:
1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
 2. MATERIAL: JACK HOUSING - ABS
 3. NOMINAL WALL THICKNESS .078(2.01). TERMINATION CAP - POLYCARBONATE. THIS PART IS DESIGNED FOR USE WITH MINI-COM PLATES AND BOXES.
 4. MEETS ALL CATEGORY 3 PERFORMANCE REQUIREMENTS AS DEFINED BY EIA/TIA.
 5. DIMENSIONS IN PARENTHESIS ARE IN METRIC.

GND FILENAME/LAYERS		MO2479NJ_DC349_00A.PRT	
PANDUIT		CORP. TINLEY PARK, ILLINOIS	
MINI-JACK CATEGORY 3 TWISTED		PAIR CONNECTOR MODULE	
CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.XX) ± .03 (.XXX) ± .005 (.XXX) ± .01		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY: NER		SCALE: NONE	
DATE: 3-25-06		DRAWING NO. 02479-349	
CHECKED BY:		DWG SIZE: A	
MATERIAL: AS NOTED			
RELEASED TO PRODUCTION			
REV	DATE	BY	CHK
R	3-25-06	NER	

50 MICRO INCH GOLD PLATING AT MATING JACK SIDE WITH CONTINUOUS NICKEL UNDERPLATING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[CJ64EIY](#) [CJ66UEIY](#) [CJ66BLY](#) [CJ66IGY](#) [CJ66UIGY](#) [CJ64IGY](#) [CJ66UWHY](#) [CJ64WHY](#) [CJ66EIY](#) [CJ64BLY](#)
[CJ66UBLY](#) [CJ66UAWY](#) [CJ66AWY](#) [CJ66IWY](#) [CJ66WHY](#) [CJ64AWY](#) [CJ64IWY](#) [CJ66UIG](#)