

CLL4728A THRU CLL4764A

SURFACE MOUNT SILICON ZENER DIODE 1 WATT, 3.3 THRU 100 VOLTS



MELF CASE

MAXIMUM RATINGS: ($T_A=25\text{ }^{\circ}\text{C}$)

Power Dissipation

Operating and Storage Junction Temperature

V_Z Tolerance: Part number with "A" suffix

V_Z Tolerance: Part number with "C" suffix

V_Z Tolerance: Part number with "D" suffix



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CLL4728A Series Silicon Zener Diode is a high quality voltage regulator for use in surface mount industrial, commercial, entertainment and computer applications.

MARKING: CATHODE BAND

SYMBOL

P_D
 T_J, T_{stg}

1.0
-65 to +200
 ± 5
 ± 2
 ± 1

UNITS

W
 $^{\circ}\text{C}$
%
%
%

ELECTRICAL CHARACTERISTICS: ($T_A=25\text{ }^{\circ}\text{C}$) $V_F=1.2\text{MAX}$ @ $I_F=200\text{mA}$ (for all types)

TYPE	ZENER VOLTAGE	TEST CURRENT	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAXIMUM CURRENT
	$V_Z @ I_{ZT}$	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$		I_{ZM}
	V	mA	Ω	Ω	mA	μA	V	mA
CLL4728A	3.3	76	10	400	1.0	100	1.0	1380
CLL4729A	3.6	69	10	400	1.0	100	1.0	1260
CLL4730A	3.9	64	9.0	400	1.0	50	1.0	1190
CLL4731A	4.3	58	9.0	400	1.0	10	1.0	1070
CLL4732A	4.7	53	8.0	500	1.0	10	1.0	970
CLL4733A	5.1	49	7.0	550	1.0	10	1.0	890
CLL4734A	5.6	45	5.0	600	1.0	10	2.0	810
CLL4735A	6.2	41	2.0	700	1.0	10	3.0	730
CLL4736A	6.8	37	3.5	700	1.0	10	4.0	660
CLL4737A	7.5	34	4.0	700	0.5	10	5.0	605
CLL4738A	8.2	31	4.5	700	0.5	10	6.0	550
CLL4739A	9.1	28	5.0	700	0.5	10	7.0	500
CLL4740A	10	25	7.0	700	0.25	10	7.6	454
CLL4741A	11	23	8.0	700	0.25	5.0	8.4	414
CLL4742A	12	21	9.0	700	0.25	5.0	9.1	380
CLL4743A	13	19	10	700	0.25	5.0	9.9	344
CLL4744A	15	17	14	700	0.25	5.0	11.4	304
CLL4745A	16	15.5	16	700	0.25	5.0	12.2	285
CLL4746A	18	14	20	750	0.25	5.0	13.7	250
CLL4747A	20	12.5	22	750	0.25	5.0	15.2	225
CLL4748A	22	11.5	23	750	0.25	5.0	16.7	205
CLL4749A	24	10.5	25	750	0.25	5.0	18.2	190
CLL4750A	27	9.5	35	750	0.25	5.0	20.6	170
CLL4751A	30	8.5	40	1000	0.25	5.0	22.8	150

R4 (21-April 2010)

CLL4728A THRU CLL4764A


**SURFACE MOUNT
SILICON ZENER DIODE
1 WATT, 3.3 THRU 100 VOLTS**



ELECTRICAL CHARACTERISTICS - Continued: ($T_A=25\text{ }^{\circ}\text{C}$) $V_F=1.2\text{MAX}$ @ $I_F=200\text{mA}$ (for all types)

TYPE	ZENER VOLTAGE	TEST CURRENT	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAXIMUM CURRENT
	$V_Z @ I_{ZT}$	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$		I_{ZM}
	V	mA	Ω	Ω	mA	μA	V	mA
CLL4752A	33	7.5	45	1000	0.25	5.0	25.1	135
CLL4753A	36	7.0	50	1000	0.25	5.0	27.4	125
CLL4754A	39	6.5	60	1000	0.25	5.0	29.7	115
CLL4755A	43	6.0	70	1500	0.25	5.0	32.7	110
CLL4756A	47	5.5	80	1500	0.25	5.0	35.8	95
CLL4757A	51	5.0	95	1500	0.25	5.0	38.8	90
CLL4758A	56	4.5	110	2000	0.25	5.0	42.6	80
CLL4759A	62	4.0	125	2000	0.25	5.0	47.1	70
CLL4760A	68	3.7	150	2000	0.25	5.0	51.7	65
CLL4761A	75	3.3	175	2000	0.25	5.0	56	60
CLL4762A	82	3.0	200	3000	0.25	5.0	62.2	55
CLL4763A	91	2.8	250	3000	0.25	5.0	69.2	50
CLL4764A	100	2.5	350	3000	0.25	5.0	76	45

MELF CASE - MECHANICAL OUTLINE

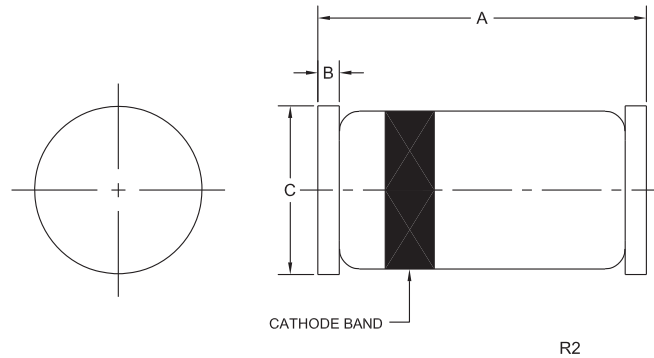

MARKING: CATHODE BAND

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.185	0.217	4.70	5.50
B	0.012	0.022	0.30	0.56
C (DIA)	0.094	0.110	2.40	2.80

MELF (REV:R2)

R4 (21-April 2010)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centalsemi.com

Worldwide Field Representatives:
www.centalsemi.com/wwreps

Worldwide Distributors:
www.centalsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centalsemi.com/terms



<http://www.centrasemi.com>

Product End of Life Notification

PDN ID:	PDN01010
Notification Date:	11/02/15
Last Buy Date:	5/02/16
Last Shipment Date	11/02/16

Summary: 1 Watt, High Voltage (82V thru 100V), glass body Zener diodes manufactured in the DO-41 and MELF packages are discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by various manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's Product Management Process. Any replacement product will be noted below. The effective date for placing the last purchase order will be six(6) months from the date of this notice and twelve(12) months from the notice date for final shipments; this may be extended if inventory is available.

Central Part Number	Replacement
CLL4762A BK	N/A
CLL4762A TR	N/A
CLL4762C BK	N/A
CLL4762C TR	N/A
CLL4763A BK	N/A
CLL4763A TR	N/A
CLL4764 TR	N/A
CLL4764A BK	N/A
CLL4764A TR	N/A
1N4762A BK	N/A
1N4762A TR	N/A
1N4763A BK	N/A
1N4763A TR	N/A
1N4764 BK	N/A
1N4764 TR	N/A
1N4764A BK	N/A
1N4764A TR	N/A

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centrasemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Central Semiconductor:

<u>CLL4751A</u>	<u>CLL4737A</u>	<u>CLL4730A</u>	<u>CLL4734A</u>	<u>CLL4739A</u>	<u>CLL4738A</u>	<u>CLL4747A</u>	<u>CLL4743A</u>	<u>CLL4749A</u>	<u>CLL4741A</u>
<u>CLL4744A</u>	<u>CLL4731A</u>	<u>CLL4732A</u>	<u>CLL4733A</u>	<u>CLL4735A</u>	<u>CLL4736A</u>	<u>CLL4740A</u>	<u>CLL4742A</u>	<u>CLL4745A</u>	<u>CLL4746A</u>
<u>CLL4748A</u>	<u>CLL4750A</u>	<u>CLL4752A</u>	<u>CLL4763A</u>	<u>CLL4751A TR</u>	<u>CLL4743A TR</u>	<u>CLL4748A TR</u>	<u>CLL4755A TR</u>		
<u>CLL4758A TR</u>	<u>CLL4752A TR</u>	<u>CLL4764A TR</u>	<u>CLL4744A TR</u>	<u>CLL4760A TR</u>	<u>CLL4757A TR</u>	<u>CLL4761A TR</u>			
<u>CLL4759A TR</u>	<u>CLL4756A TR</u>	<u>CLL4762A TR</u>	<u>CLL4754A TR</u>	<u>CLL4729A TR</u>	<u>CLL4753A TR</u>	<u>CLL4728A TR</u>			
<u>CLL4745A TR</u>	<u>CLL4735A TR</u>	<u>CLL4730A TR</u>	<u>CLL4746A TR</u>	<u>CLL4729C TR</u>	<u>CLL4738A TR</u>	<u>CLL4739A TR</u>			
<u>CLL4734A TR</u>	<u>CLL4750A BK</u>	<u>CLL4744A BK</u>	<u>CLL4728A BK</u>	<u>CLL4747A BK</u>	<u>CLL4734A BK</u>	<u>CLL4736A BK</u>			
<u>CLL4729A BK</u>	<u>CLL4751A BK</u>	<u>CLL4742A BK</u>	<u>CLL4738A BK</u>	<u>CLL4733A BK</u>	<u>CLL4758A BK</u>	<u>CLL4764A BK</u>			
<u>CLL4755A BK</u>	<u>CLL4739A BK</u>	<u>CLL4735A BK</u>	<u>CLL4740A BK</u>	<u>CLL4746A BK</u>					