





Kyocera's series of Multilayer Ceramic Chip Capacitors are designed to meet a wide variety of needs. We offer a complete range of products for both general and specialized applications, including CM series for general-purpose, CT series for low profile, CU series for Hi-Q, AT series for Au termination, ST series for soft termination, and CF series for high-voltage.

Features


- We have a network worldwide in order to supply our global customer bases quickly and efficiently and to maintain our reputation as one of the highest-volume producers in the industry.
- All our products are highly reliable due to their monolithic structure of high-purity and superfine uniform ceramics and their integral internal electrodes.
- By combining superior manufacturing technology and materials with high dielectric constants, we produce extremely compact components with exceptional specifications.
- Our stringent quality control in every phase of production from material procurement to shipping ensures consistent manufacturing and super quality.
- Kyocera components are available in a wide choice of dimensions, temperature characteristics, rated voltages, and terminations to meet specific configurational requirements.

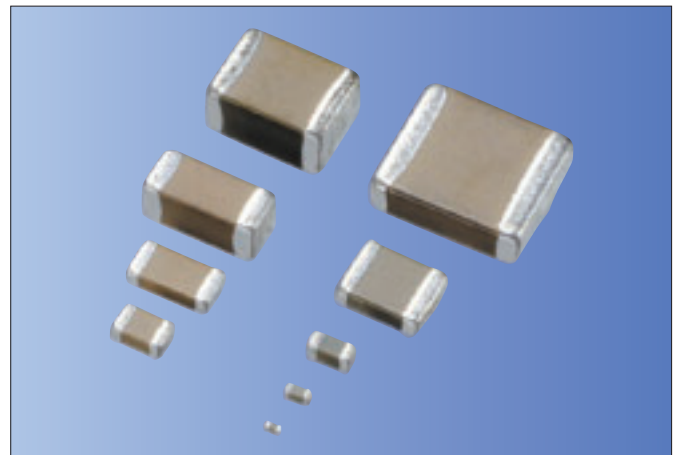


RoHS Compliant

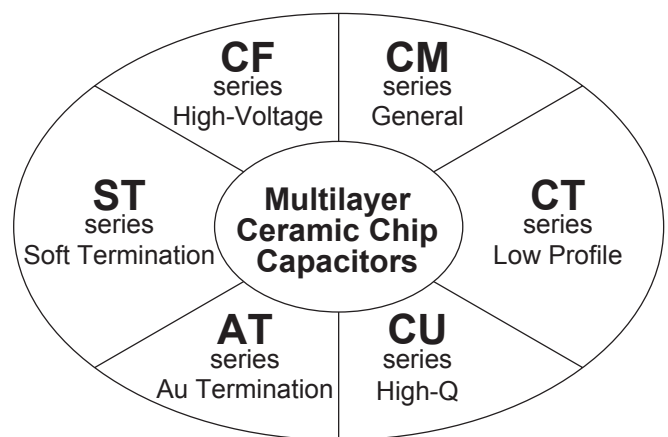


Structure

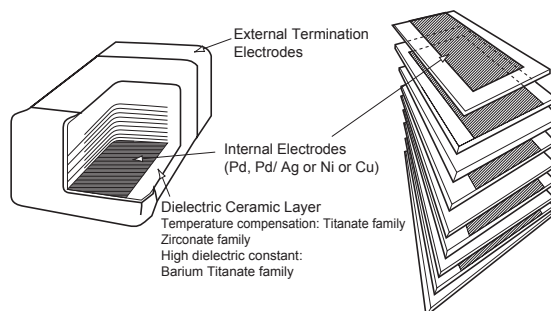

Nickel Barrier Termination Products



Tape and Reel



Bulk Case



Please contact your local AVX, Kyocera sales office or distributor for specifications not covered in this catalog.

Our products are continually being improved. As a result, the capacitance range of each series is subject to change without notice. Please contact an sales representative to confirm compatibility with your application.



Kyocera Ceramic Chip Capacitors are available for different applications as classified below:


Series	Dielectric Options	Typical Applications	Features	Terminations	Available Size
CM	C0G (NP0) X5R X7R *X6S X7S	General purpose	Wide cap range	Nickel barrier/ Tin	01005, 0201, 0402 0603, 0805, 1206 1210, 1812
CT	X5R X7R	IC card (Decoupling)	Low profile	Nickel barrier/ Tin	0201, 0402, 0603 0805, 1206, 1210
CU	C0G (NP0)	Power amplifier	High-Q	Nickel barrier/ Tin	01005
AT	X5R X7R	Optical communications	Au termination	Nickel barrier/ Au	0201, 0402
ST	X5R X7R X7S	PCB with severe bending conditions	Soft termination	Nickel barrier/ Tin (Soft Termination)	0201, 0402 1206, 1210
CF	C0G (NP0) X7R	High voltage & Power circuits	High voltage 250VDC, 630VDC 1000VDC, 2000VDC 3000VDC, 4000VDC	Nickel barrier/ Tin	0805, 1206, 1210 1808, 1812, 2208 2220

* Option

* Negative temperature coefficient dielectric types are available on request.



Dimensions

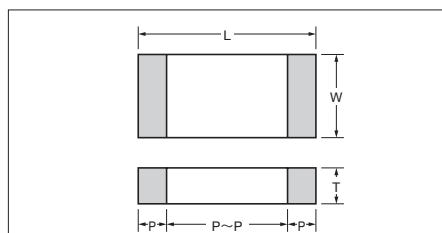

※Packaging Code

(E 8 / 2)

Taping Material		Taping Width		Pitch	
Code	Material	Code	Width	Code	Pitch
E	Plastic	4	4mm	1	1mm
P	Paper	8	8mm	2	2mm
		12	12mm	4	4mm
				8	8mm

Dimensions and Packaging Quantities

Size	Code		Dimension Code	Dimensions (mm)						Maximum quantity per reel	
	JIS	EIA		L	W	T	P min.	P max.	P to P min.	φ180 Reel*	φ330 Reel*
02	0402	01005	A	0.4±0.02	0.2±0.02	0.2±0.02	0.07	0.14	0.13	40kp (E4/1) 20kp (P8/2)	-
03	0603	0201	A	0.6±0.03	0.3±0.03	0.22 max.	0.10	0.20	0.20	30kp (P8/1) 15kp (P8/2)	150kp (P8/1) 50kp (P8/2)
			B			0.3±0.03				30kp (P8/1) 15kp (P8/2)	150kp (P8/1) 50kp (P8/2)
			C	0.6±0.05	0.3±0.05	0.3±0.05	0.13	0.23	0.19	30kp (P8/1) 15kp (P8/2)	150kp (P8/1) 50kp (P8/2)
			D	0.6±0.09	0.3±0.09	0.3±0.09	0.13	0.23	0.19	15kp (P8/2)	-
			E			0.25 max.				15kp (P8/2)	-
			F	0.6±0.10	0.3±0.10	0.3±0.10				15kp (P8/2)	-
05	1005	0402	A	1.0±0.05	0.5±0.05	0.22 max.	0.15	0.35	0.30	20kp (P8/1) 10kp (P8/2)	100kp (P8/1) 50kp (P8/2)
			B			0.25 max.				20kp (P8/1) 10kp (P8/2)	100kp (P8/1) 50kp (P8/2)
			C			0.33 max.				20kp (P8/1) 10kp (P8/2)	100kp (P8/1) 50kp (P8/2)
			D			0.35 max.				20kp (P8/1) 10kp (P8/2)	100kp (P8/1) 50kp (P8/2)
			E			0.5±0.05				20kp (P8/1) 10kp (P8/2)	100kp (P8/1) 50kp (P8/2)
			F	1.0±0.07	0.5±0.07	0.5±0.07				20kp (P8/1) 10kp (P8/2)	100kp (P8/1) 50kp (P8/2)
			G	1.0±0.10	0.5±0.10	0.35 max.				20kp (P8/1) 10kp (P8/2)	100kp (P8/1) 50kp (P8/2)
			H			0.5±0.10				20kp (P8/1) 10kp (P8/2)	100kp (P8/1) 50kp (P8/2)
			J	1.0±0.15	0.5±0.15	0.5±0.15				20kp (P8/1) 10kp (P8/2)	100kp (P8/1) 50kp (P8/2)
			K	1.0±0.20	0.5±0.20	0.33 max.				10kp (P8/2)	-
			L			0.5±0.20				10kp (P8/2)	-
			A	1.6±0.10	0.8±0.10	0.55 max.				4kp (P8/4)	10kp (P8/4)
			B			0.8±0.10				8kp (P8/2) 4kp (P8/4)	20kp (P8/2) 10kp (P8/4)
105	1608	0603	C	1.6±0.15	0.8±0.15	0.55 max.	0.20	0.60	0.50	8kp (P8/2) 4kp (P8/4)	20kp (P8/2) 10kp (P8/4)
			D	1.6±0.20	0.8±0.20	0.8±0.15				8kp (P8/2) 4kp (P8/4)	20kp (P8/2) 10kp (P8/4)
			E			0.55 max.				8kp (P8/2) 4kp (P8/4)	20kp (P8/2) 10kp (P8/4)
			F	1.6±0.20	0.8±0.20	0.8±0.20				*	-
			A			0.55 max.				4kp (P8/4)	10kp (P8/4)
			B			0.95 max.				4kp (P8/4)	10kp (P8/4)
21	2012	0805	C	2.0±0.10	1.25±0.10	1.00 max.	0.20	0.75	0.70	4kp (E8/4)	10kp (E8/4)
			D			0.6±0.1				4kp (P8/4)	10kp (P8/4)
			E			0.85±0.10				4kp (P8/4)	10kp (P8/4)
			F			1.05±0.10				3kp (E8/4)	10kp (E8/4)
			G			1.25±0.10				3kp (E8/4)	10kp (E8/4)
			H	2.0±0.15	1.25±0.15	0.55 max.				4kp (P8/4)	10kp (P8/4)
			J			0.95 max.				4kp (P8/4)	10kp (P8/4)
			K			1.25±0.15				3kp (E8/4)	10kp (E8/4)
			L			0.95 max.				4kp (P8/4)	10kp (P8/4)
			M			1.25±0.20				3kp (E8/4)	10kp (E8/4)
			A	3.2±0.20	1.6±0.15	0.95 max.				4kp (P8/4)	10kp (P8/4)
			B			1.00 max.				4kp (E8/4)	10kp (E8/4)
			C			1.15±0.10				3kp (E8/4)	10kp (E8/4)
			D			1.25±0.10				3kp (E8/4)	10kp (E8/4)
			E			1.6±0.15				2.5kp (E8/4)	5kp (E8/4)
316	3216	1206	F	3.2±0.20	1.6±0.20	0.95 max.	0.30	0.85	1.40	4kp (P8/4)	10kp (P8/4)
			G			1.00 max.				4kp (E8/4)	10kp (E8/4)
			H			1.6±0.20				2.5kp (E8/4)	5kp (E8/4)
			J			1.6±0.20				2.5kp (E8/4)	5kp (E8/4)
			K	3.2±0.30	1.6±0.30	1.6±0.30				2kp (E8/4)	-
			L	3.2±0.35		1.6±0.30				2kp (E8/4)	-
32	3225	1210	A	3.2±0.30	2.5±0.20	1.00 max.	0.30	1.00	1.40	4kp (E8/4)	10kp (E8/4)
			B			1.40 max.				3kp (E8/4)	10kp (E8/4)
			C			1.60 max.				2.5kp (E8/4)	5kp (E8/4)
			D			1.6±0.15				2.5kp (E8/4)	5kp (E8/4)
			E			2.20 max.				2kp (E8/4)	5kp (E8/4)
			F			2.0±0.2				2kp (E8/4)	5kp (E8/4)
42	4520	1808	G	4.5±0.20	2.0±0.20	2.5±0.2	0.15	0.85	2.60	1kp (E8/4)	4kp (E8/4)
			A			1.6 max.				2kp (E12/4)	-
			B			2.2 max.				2kp (E12/4)	-
			C			2.0 max.				1kp (E12/8)	-
			D			2.0±0.2				1kp (E12/8)	-
			E			2.5 max.				0.5kp (E12/8)	-
43	4532	1812	F	4.5±0.30	3.2±0.20	2.5±0.2	0.30	1.10	2.00	0.5kp (E12/8)	-
			G			2.8±0.2				0.5kp (E12/8)	-
			H			2.8±0.2				0.5kp (E12/8)	-
			I			2.8±0.2				0.5kp (E12/8)	-
			J			2.8±0.2				0.5kp (E12/8)	-
			K			2.8±0.2				0.5kp (E12/8)	-
52	5720	2208	A	5.7±0.40	2.0±0.20	2.2 max.	0.15	0.85	4.20	2kp (E12/4)	-
55	5750	2220	A	5.7±0.40	5.0±0.40	2.0 max.	0.30	1.40	2.50	1kp (E12/8)	-
			B			2.5 max.				0.5kp (E12/8)	-
			C			2.8 max.				0.5kp (E12/8)	-

Note: Taping denotes the quantity packaged per reel (kp means 1000 pieces). * Please contact us.



KYOCERA PART NUMBER

CM 03 X5R 225 M 06 A H □ □ □

SERIES CODE

CM = General Purpose AT = Au termination
CT = Low Profile ST = Soft termination
CU = High-Q CF = High Voltage

SIZE CODE

SIZE	EIA	(JIS)	SIZE	EIA	(JIS)
02	=	01005 (0402)	32	=	1210 (3225)
03	=	0201 (0603)	42	=	1808 (4520)
05	=	0402 (1005)	43	=	1812 (4532)
105	=	0603 (1608)	52	=	2208 (5720)
21	=	0805 (2012)	55	=	2220 (5750)
316	=	1206 (3216)			

DIELECTRIC CODE

CODE EIA CODE

CG = C0G (NPO) X7S = X7S (Option)
X5R = X5R X6S = X6S (Option)
X7R = X7R

Negative temperature coefficient dielectric types are available on request.

CAPACITANCE CODE

Capacitance expressed in pF.

Two significant digits plus number of zeros.

For Values < 10pF, Letter R denotes decimal point,

eg. 100000pF = 104 1.5pF = 1R5
0.1μF = 104 0.5pF = R50
4700pF = 472 100μF = 107

TOLERANCE CODE

A = ±0.05pF (option) D = ±0.5pF K = ±10%
B = ±0.1pF G = ±2% (option) M = ±20%
C = ±0.25pF J = ±5%

VOLTAGE CODE

04 = 4VDC	100 = 100VDC	1000 = 1000VDC
06 = 6.3VDC	250 = 250VDC	2000 = 2000VDC
10 = 10VDC	630 = 630VDC	3000 = 3000VDC
16 = 16VDC		4000 = 4000VDC
25 = 25VDC		
35 = 35VDC		
50 = 50VDC		

TERMINATION CODE

A = Nickel Barrier/ Tin *G = Nickel Barrier/ Au Y = Nickel Barrier/ Cu S = Nickel Barrier/ Tin (Soft Termination)
*K = Nickel Barrier/ Au
G : AuSn solder and conductive adhesive.
K : Wire bonding and conductive adhesive.

PACKAGING CODE

B = Bulk	H = 7" Reel Taping & 2mm Cavity pitch
C = Bulk Cassette (option)	N = 13" Reel Taping & 2mm Cavity pitch
T = 7" Reel Taping & 4mm or 8mm*1 Cavity pitch	W = 13" Reel Taping & 1mm Cavity pitch
Q = 7" Reel Taping & 1mm Cavity pitch	*P = 7" Reel Taping & 1mm Cavity pitch
L = 13" Reel Taping & 4mm Cavity pitch	* Carrier tape width 4mm.
	*1 Applied for size 43 to 55.

OPTION

Thickness max. value is indicated in CT series

EX. 125 → 1.25mm max.

095 → 0.95mm max.

Temperature Compensation Type

Code	ppm/ °C		Temperature Range
CG	0	±30	−55 to 125°C
CH		±60	

Note: All parts of C0G will be marked as "CG" but will conform to the above table.
Temperature coefficients are determined by calculation based on measurement at 20°C and 85°C.

High Dielectric Constant Type

EIA Dielectric	Temperature Range	ΔC max.
X5R	-55 to 85°C	±15%
X7R	-55 to 125°C	
X7S	-55 to 125°C	±22%
*X6S	-55 to 105°C	

* option

Available Tolerances

Dielectric materials, capacitance values and tolerances are available in the following combinations only:

EIA Dielectric	Tolerance	Capacitance
C0G	*3 A=±0.05pF	<0.5pF
	B=±0.1pF	≤5pF
	C=±0.25pF D=±0.50pF	*1 <10pF
	*3 G=±2% J=±5% K=±10%	≥10pF E12 Series
*3 X6S X5R X7S X7R	*2 K=±10% M=±20%	*4 E3 Series

Note:

*1 Nominal values below 10pF are available in the standard values of 0.5pF, 1.0pF, 1.5pF, 2.0pF, 3.0pF, 4.0pF, 5.0pF, 6.0pF, 7.0pF, 8.0pF, 9.0pF

*2 J = ±5% for X7R (X5R) is available on request.

*3 option

*4 E6 series is available on request.

E Standard Number

E3	E6	E12	E24 (Option)	
1.0	1.0	1.0	1.0	1.1
		1.2	1.2	1.3
	1.5	1.5	1.5	1.6
		1.8	1.8	2.0
2.2	2.2	2.2	2.2	2.4
		2.7	2.7	3.0
	3.3	3.3	3.3	3.6
		3.9	3.9	4.3
4.7	4.7	4.7	4.7	5.1
		5.6	5.6	6.2
	6.8	6.8	6.8	7.5
		8.2	8.2	9.1

Features

We offer a diverse product line ranging from ultra-compact (0.4×0.2mm) to large (4.5×3.2mm) components configured for a variety of temperature characteristics, rated voltages, and packages. We offer the choice and flexibility for almost any applications.

Applications

This standard type is ideal for use in a wide range of applications, from commercial to industrial equipment.

Temperature Compensation Dielectric

Size (EIA Code)	CM02 (01005)		CM03 (0201)		CM05 (0402)	CM105 (0603)	CM21 (0805)		
Temperature	CΔ*1		CΔ*1		CΔ*1	CΔ*1	CΔ*1		
Rated Voltage (VDC)	16	25	25	50	50	50	16	25	50
Capacitance (pF)									
R20 0.2									
R50 0.5									
1R0 1.0									
1R5 1.5									
2.0									
3.0									
4.0									
5.0									
6.0									
7.0									
8.0									
9.0									
100 10	A		B	B					
120 12									
15 15									
18 18									
22 22									
27 27									
33 33									
39 39									
47 47									
56 56									
68 68									
82 82									
101 100									
121 120									
150 150									
180 180									
220 220									
270 270									
330 330									
390 390									
470 470									
560 560									
680 680									
820 820									
102 1000									
122 1200									
1500 1500									
1800 1800									
2200 2200									
2700 2700									
3300 3300									
3900 3900									
4700 4700									
5600 5600									
6800 6800									
8200 8200									
103 10000									
123 12000									
15000 15000									
18000 18000									

<Standard Capacitance Value>

E12 Series

Please contact for capacitance value other than standard.

*1: CG,CH

Alphabets in capacitance chart denote dimensions.

Please refer to the below table for detail.

(Example)

In case of "B" for CM03;

L : 0.6±0.03mm

W : 0.3±0.03mm

T : 0.3±0.03mm

Size	Size Code	Dimension (mm)		
		L	W	T
02	A	0.4±0.02	0.2±0.02	0.2±0.02
03	B	0.6±0.03	0.3±0.03	0.3±0.03
05	E	1.0±0.05	0.5±0.05	0.5±0.05
105	B	1.6±0.10	0.8±0.10	0.8±0.10
21	E	2.0±0.10	1.25±0.10	0.85±0.10
	G	2.0±0.10	1.25±0.10	1.25±0.10

X5R Dielectric

Size (EIA Code)	CM02 (01005)			CM03 (0201)				CM05 (0402)						CM105 (0603)						CM21 (0805)					
Rated Voltage (VDC)	6.3	10	16	6.3	10	16	25	4	6.3	10	16	25	35	4	6.3	10	16	25	50	4	6.3	10	16	25	50
Capacitance (pF)	101 151	100 150 220 330	100 150 220 330																						
102		A8	A8																						
152																									
103																									
153																									
104																									
154																									
105																									
155																									
106																									
156																									
107																									

Size (EIA Code)	CM316 (1206)						CM32 (1210)						CM43 (1812)	
Rated Voltage (VDC)	6.3	10	16	25	50	100	4	6.3	10	16	25	50	6.3	50
Capacitance (pF)	220000 470000 1000000													
105														
155														
106														
156														
107														

<Standard Capacitance Value>
CM21 size and smaller : E6 Series
CM316 size and larger / capacitance value of 0.1μF and larger : E3 Series
Please contact for capacitance value other than standard.
Optional Spec.

Two digits alphanumeric in capacitance chart denote dimensions and tan δ.
Please refer to the below table for detail.

(Example)

In case of "B3" for CM03;
L : 0.6±0.03mm
W : 0.3±0.03mm
T : 0.3±0.03mm
Tan δ : 5.0% max.

Size	Size Code	Dimension (mm)		
		L	W	T
02	A	0.4±0.02	0.2±0.02	0.2±0.02
	B	0.6±0.03	0.3±0.03	0.3±0.03
03	C	0.6±0.05	0.3±0.05	0.3±0.05
	D	0.6±0.09	0.3±0.09	0.3±0.09
05	E	1.0±0.05	0.5±0.05	0.5±0.05
	H	1.0±0.10	0.5±0.10	0.5±0.10
	J	1.0±0.15	0.5±0.15	0.5±0.15
	L	1.0±0.20	0.5±0.20	0.5±0.20
105	B	1.6±0.10	0.8±0.10	0.8±0.10
	D	1.6±0.15	0.8±0.15	0.8±0.15
21	G	2.0±0.10	1.25±0.10	1.25±0.10
	K	2.0±0.15	1.25±0.15	1.25±0.15
	M	2.0±0.20	1.25±0.20	1.25±0.20

Size	Size Code	Dimension (mm)		
		L	W	T
316	E	3.2±0.20	1.6±0.15	1.6±0.15
	H	3.2±0.20	1.6±0.20	1.6±0.20
32	B	3.2±0.30	2.5±0.20	1.40 max.
	C	3.2±0.30	2.5±0.20	1.60 max.
	F	3.2±0.30	2.5±0.20	2.0±0.2
43	D	4.5±0.30	3.2±0.20	2.5±0.2
	E	4.5±0.30	3.2±0.20	2.8±0.2

Tan δ Code	Tan δ
1	2.5% max.
3	5.0% max.
4	7.0% max.
5	7.5% max.
7	10.0% max.
8	12.5% max.
9	15.0% max.
10	20.0% max.

X7R Dielectric

Size (EIA Code)	CM02 (01005)	CM03 (0201)			CM05 (0402)		CM105 (0603)					CM21 (0805)				
Rated Voltage (VDC) Capacitance (pF)	16	10	16	25	16	25	6.3	10	16	25	50	6.3	10	16	25	50
101 100	A8															
151 150																
220				B2												
330					B2											
470	A8															
680																
102 1000																
152 1500																
2200	B3															
3300																
4700																
6800																
103 10000	B3															
153 15000																
22000						E2										
33000																
47000	B3															
68000						E8										
104 100000							E8									
220000																
470000	B3															
680000																
105 1000000																
2200000																
4700000	B3															
6800000																
106 10000000																
22000000																

Size (EIA Code)	CM316 (1206)						CM32 (1210)					CM43 (1812)	
Rated Voltage (VDC) Capacitance (pF)	6.3	10	16	25	50	100	10	16	25	50	100	50	100
104 47000													
100000													
220000													
470000													
105 1000000													
2200000													
4700000													
106 10000000													
22000000													

Optional Spec.

<Standard Capacitance Value>

CM21 size and smaller : E6 Series

CM316 size and larger / capacitance value of 0.1μF and larger : E3 Series

Please contact for capacitance value other than standard.

Two digits alphanumerics in capacitance chart denote dimensions and tan δ.

Please refer to the below table for detail.

(Example)

In case of "B3" for CM03;

L : 0.6±0.03mm

W : 0.3±0.03mm

T : 0.3±0.03mm

Tan δ : 5.0% max.

Size	Size Code	Dimension (mm)		
		L	W	T
02	A	0.4±0.02	0.2±0.02	0.2±0.02
	B	0.6±0.03	0.3±0.03	0.3±0.03
	E	1.0±0.05	0.5±0.05	0.5±0.05
105	B	1.6±0.10	0.8±0.10	0.8±0.10
	D	1.6±0.15	0.8±0.15	0.8±0.15
21	G	2.0±0.10	1.25±0.10	1.25±0.10
	M	2.0±0.20	1.25±0.20	1.25±0.20

Size	Size Code	Dimension (mm)		
		L	W	T
316	C	3.2±0.20	1.6±0.15	1.15±0.10
	E	3.2±0.20	1.6±0.15	1.6±0.15
	H	3.2±0.20	1.6±0.20	1.6±0.20
32	B	3.2±0.30	2.5±0.20	1.40 max.
	F	3.2±0.30	2.5±0.20	2.0±0.2
	G	3.2±0.30	2.5±0.20	2.5±0.2
43	B	4.5±0.30	3.2±0.20	2.0±0.2
	D	4.5±0.30	3.2±0.20	2.5±0.2

Tan δ Code	Tan δ
1	2.5% max.
2	3.5% max.
3	5.0% max.
5	7.5% max.
8	12.5% max.

X7S Dielectric

Size (EIA Code)	CM316 (1206)
Rated Voltage (VDC) Capacitance (pF)	100
104 47000	
100000	
220000	
470000	
105 1000000	
2200000	
4700000	
106 10000000	
22000000	

Size	Size Code	Dimension (mm)		
		L	W	T
316	H	3.2±0.20	1.6±0.20	1.6±0.20
	J	3.2±0.30	1.6±0.30	1.6±0.30

Tan δ Code	Tan δ
3	5.0% max.

Two digits alphanumerics in capacitance chart denote dimensions and tan δ.

Please refer to the below table for detail.

Optional Spec.

Features

This low profile series is ideal where height clearance is limited.

Applications

Circuits requiring a compact, low-profile design, such as smart cards.

X5R Dielectric

Size (EIA Code)	CT03 (0201)		CT05 (0402)				CT105 (0603)			CT21 (0805)					CT316 (1206)					CT32 (1210)	
Rated Voltage (VDC) Capacitance (pF)	4	6.3	4	6.3	16	25	4	6.3	16	6.3	10	16	25	50	6.3	10	16	25	50	16	25
2200 4700 10000																					
103					D3	D3															
22000 47000 100000	A8	A8		B8																	
104																					
220000 470000 1000000	E8	E8	G8	A8/C8					A8			B3	B3				A4	A3	A3	G8	
105				C8			E8	C5		J5	B4 H8/J8	H8/J8 J8		L3			B4 F8/G8	B3 F8/G8	A8 F5	F3	A3 A3/E3
106				K9											A5/G8		F8/G8				E3

<Standard Capacitance Value>

E3 Series

Please contact for capacitance value other than standard.

Optional Spec.

X7R Dielectric

Size (EIA Code)	CT05 (0402)		
Rated Voltage (VDC) Capacitance (pF)	10	16	25
220 470 1000			D2
102			
2200 4700 10000	D3	D2	
103			
22000 47000 100000			
104			
105			

E6 Series: Option

Two digits alphanumerics in capacitance chart denote dimensions and tan δ .

Please refer to the below table for detail.

(Example)

In case of "B8" for CT05;

L : 1.0±0.05mm

W : 0.5±0.05mm

T : 0.25 max.

Tan δ : 12.5% max.

Size	Size Code	Dimension (mm)		
		L	W	T
03	A	0.6±0.03	0.3±0.03	0.22 max.
	E	0.6±0.09	0.3±0.09	0.25 max.
05	A	1.0±0.05	0.5±0.05	0.22 max.
	B	1.0±0.05	0.5±0.05	0.25 max.
	C	1.0±0.05	0.5±0.05	0.33 max.
	D	1.0±0.05	0.5±0.05	0.35 max.
	G	1.0±0.10	0.5±0.10	0.35 max.
	K	1.0±0.20	0.5±0.20	0.33 max.
105	A	1.6±0.10	0.8±0.10	0.55 max.
	C	1.6±0.15	0.8±0.15	0.55 max.
	E	1.6±0.20	0.8±0.20	0.55 max.
21	B	2.0±0.10	1.25±0.10	0.95 max.
	H	2.0±0.15	1.25±0.15	0.55 max.
	J	2.0±0.15	1.25±0.15	0.95 max.
	L	2.0±0.20	1.25±0.20	0.95 max.

Size	Size Code	Dimension (mm)		
		L	W	T
316	A	3.2±0.20	1.6±0.15	0.95 max.
	B	3.2±0.20	1.6±0.15	1.00 max.
	F	3.2±0.20	1.6±0.20	0.95 max.
	G	3.2±0.20	1.6±0.20	1.00 max.
32	A	3.2±0.30	2.5±0.20	1.00 max.
	E	3.2±0.30	2.5±0.20	2.20 max.

Tan δ Code	Tan δ
2	3.5% max.
3	5.0% max.
4	7.0% max.
5	7.5% max.
8	12.5% max.
9	15.0% max.

Features

- Ultra-compact size (0.4mm×0.2mm)
- High efficiency in RF transmission circuit performance (High-Q, Low ESR characteristics)

Temperature Compensation Dielectric

Size (EIA Code)	CU02 (01005)
Temperature	CΔ*1
Rated Voltage (VDC)	16
Capacitance (pF)	
R20 0.2	
R50 0.5	
1R0 1.0	
1R5 1.5	
2.0	
3.0	
4.0	
5.0	
6.0	
7.0	
8.0	
9.0	
100 10	
120 12	
15	
18	
22	

<Standard Capacitance Value>

E12 Series

Please contact for capacitance value other than standard.

*1: CG,CH

Applications

- Peripheral circuits of power amplifier for mobile communication device (Impedance matching etc.)
- Others: RF transmission circuits

Alphabets in capacitance chart denote dimensions.

Please refer to the below table for detail.

(Example)

In case of "A" for CU02;

L : 0.4±0.02mm

W : 0.2±0.02mm

T : 0.2±0.02mm

Size	Size Code	Dimension (mm)		
		L	W	T
02	A	0.4±0.02	0.2±0.02	0.2±0.02

Features

Enables wire bonding, AuSn solder and conductive adhesive assembly by Au plated external termination electrodes.

Applications

- Optical communications
- Inside of IC packages

X5R Dielectric

Size (EIA Code)	Rated Voltage (VDC)	AT03 (0201)				AT05 (0402)			
		6.3	10	16	25	6.3	10	16	25
151	150								
	220								
	330								
	470								
102	680								
	1000								
	1500								
	2200								
152	3300								
	4700								
	6800								
	10000								
103	15000								
	22000								
	33000								
	47000								
153	68000								
	100000								
	150000								
	220000								
104	330000								
	470000								
	680000								
	1000000								
105	2200000								
	4700000								
	6800000								
	10000000								

Optional Spec.

<Standard Capacitance Value>

E3 Series

Please contact for capacitance value other than standard.

Two digits alphanumerics in capacitance chart denote dimensions and tan δ. Please refer to the below table for detail.

(Example)

In case of "B3" for AT03;

L : 0.6±0.03mm

W : 0.3±0.03mm

T : 0.3±0.03mm

Tan δ : 5.0% max.

X7R Dielectric

Size (EIA Code)	Rated Voltage (VDC)	AT03 (0201)			AT05 (0402)	
		10	16	25	16	25
151	150					
	220					
	330					
	470					
102	680					
	1000					
	1500					
	2200					
152	3300					
	4700					
	6800					
	10000					
103	15000					
	22000					
	33000					
	47000					
153	68000					
	100000					
	150000					
	220000					
104	330000					
	470000					
	680000					
	1000000					

Optional Spec.

Please contact for AT02 (01005) series.

Size	Size Code	Dimension (mm)		
		L	W	T
03	B	0.6±0.03	0.3±0.03	0.3±0.03
	C	0.6±0.05	0.3±0.05	0.3±0.05
	D	0.6±0.09	0.3±0.09	0.3±0.09
05	E	1.0±0.05	0.5±0.05	0.5±0.05

Tan δ Code	Tan δ
2	3.5% max.
3	5.0% max.
4	7.0% max.
5	7.5% max.
7	10.0% max.
8	12.5% max.

Features

Realizes stress relief effect by soft termination which suppresses cracks in dielectrics.

Applications

Electronic equipment for applications such as consumer and industrial uses.

X5R Dielectric

Size (EIA Code)	ST03 (0201)		ST05 (0402)		ST316 (1206)				ST32 (1210)		
Rated Voltage (VDC)	4	6.3	6.3	10	16	25	50	100	16	25	50
Capacitance (pF)											
105 1000000		C8						J3			
2200000	F8			F8		E3					
4700000			J8		E3	E3	H3				
106 10000000					H8	H8			G3	G8	G3
22000000											

Optional Spec.

X7R Dielectric

Size (EIA Code)	ST316 (1206)			ST32 (1210)		
Rated Voltage (VDC)	16	25	50	16	25	50
Capacitance (pF)						
105 1000000						
2200000			H3			
4700000			K3			
106 10000000	H8	H3		G8	G8	G3
22000000						

Optional Spec.

X7S Dielectric

Size (EIA Code)	ST316 (1206)
Rated Voltage (VDC)	100
Capacitance (pF)	
105 1000000	
2200000	H3
4700000	K3
106 10000000	
22000000	

Optional Spec.

<Standard Capacitance Value>

E3 Series

Please contact for capacitance value other than standard.

Two digits alphanumeric in capacitance chart denote dimensions and tan δ . Please refer to the below table for detail.

(Example)

In case of "E3" for ST316;

L : 3.2±0.20mm

W : 1.6±0.15mm


T : 1.6±0.15mm

Tan δ : 5.0% max.

Size	Size Code	Dimension (mm)		
		L	W	T
03	C	0.6±0.05	0.3±0.05	0.3±0.05
	F	0.6±0.10	0.3±0.10	0.3±0.10
05	F	1.0±0.07	0.5±0.07	0.5±0.07
	J	1.0±0.15	0.5±0.15	0.5±0.15
316	E	3.2±0.20	1.6±0.15	1.6±0.15
	H	3.2±0.20	1.6±0.20	1.6±0.20
	J	3.2±0.30	1.6±0.30	1.6±0.30
	K	3.2±0.35	1.6±0.30	1.6±0.30
32	G	3.2±0.30	2.5±0.20	2.5±0.20









Tan δ Code	Tan δ
3	5.0% max.
8	12.5% max.

Structure

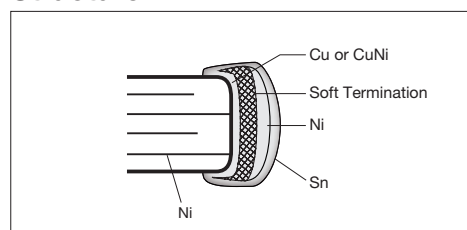

Features

Perform less than 1 fit failure ratio by high voltage durability and high reliability which has optimized internal electrode structure based on designing of safety.

	General Spec.	Mid-voltage range		
	Straight structure	Straight structure	Dual cascade	Triple cascade
Internal structure				
Equivalent circuit				

• Mid-voltage range (Straight structure)

Enough break-down voltage margin by taking suitable dielectric thickness for individual rated voltage.

• Mid-voltage range (Dual cascade structure)

Realize high voltage performance by series connection of two multilayer capacitor units in a MLCC to divide applied voltage into two. High durability to surging voltage is guaranteed.

• Mid-voltage range (Triple cascade structure)

Realize high voltage performance by series connection of three multilayer capacitor units in a MLCC to divide applied voltage into three. Excellent safety is secured.

The multi cascade structure is a safety design to avoid short circuit failure.

Applications

- Soft modem/ Isolation circuit (Satisfied safety capacitor)
- Camera/ Strobe circuit, Surge Killing, Trigger Circuit
- LCD Back light Inverter, Ballast Capacitor
- Power Circuit/ DC-DC Converter, Snubber Circuit

Special specification for individual application

A suitable guaranteeing specification will be examined to satisfy customer's application, such as for AC voltage application.

* Information of usage condition will be necessary to be examined.

Custom specification will be available according to your request. Ex. Specification relating to AC voltage.

* In-use condition shall be confirmed.

Temperature Compensation Dielectric

Size (EIA Code)	CF21 (0805)	CF316 (1206)			CF32 (1210)		CF42 (1808)			CF43 (1812)		CF52 (2208)
Temperature Characteristics	CΔ*	CΔ*			CΔ*		CΔ*			CΔ*		CΔ*
Rated Voltage (VDC) Capacitance (pF)	250	630	1000	2000	1000	2000	1000	2000	3000	1000	3000	4000
R50	0.5											
1R0	1.0											
1R5	1.5											
	2.0											
	3.0											
	4.0											
	5.0	D	C	C			A	A	A			
	6.0											
	7.0											
	8.0											
	9.0											
100	10											A
220	22											
	47					D						
101	100	E	D	D			B	B	B			
221	220	G			F						C	
	470											
102	1000									C		

<Standard Capacitance Value>

E3 Series

Please contact for capacitance value other than standard.

* : CG,CH

Alphabets in capacitance chart denote dimensions. Please refer to the below table for detail.

Size	Size Code	Dimension (mm)		
		L	W	T
21	D	2.0±0.10	1.25±0.10	0.6±0.10
	E	2.0±0.10	1.25±0.10	0.85±0.10
	G	2.0±0.10	1.25±0.10	1.25±0.10
316	C	3.2±0.20	1.6±0.15	1.15±0.10
	D	3.2±0.20	1.6±0.15	1.25±0.10
	E	3.2±0.20	1.6±0.15	1.6±0.15

Size	Size Code	Dimension (mm)		
		L	W	T
32	D	3.2±0.30	2.5±0.20	1.6±0.15
	F	3.2±0.30	2.5±0.20	2.0±0.2
42	A	4.5±0.20	2.0±0.20	1.6 max.
	B	4.5±0.20	2.0±0.20	2.2 max.
43	C	4.5±0.30	3.2±0.20	2.5 max.
52	A	5.7±0.40	2.0±0.20	2.2 max.

Tolerance Code

Temperature Compensation		
Code	Tolerance	Capacitance
C	±0.25pF	C<10pF
D	±0.5pF	
J	±5%	C≥10pF
K	±10%	

X7R Dielectric

Size (EIA Code)	CF21 (0805)	CF316 (1206)			CF32 (1210)			CF42 (1808)		CF43 (1812)				CF55 (2220)			
Rated Voltage (VDC) Capacitance (pF)	250	250	630	1000	250	630	1000	1000	2000	250	630	1000	2000	250	630	1000	2000
220 470 1000	E1		C1	C1 D1 E1					B1								
2200 4700 10000	F1		D1				D1	B1					C1				
22000 47000 100000	G1	C1	E1			D1 F1				A1 C1	A1 C1	C1				A1 B1	A1 C1
220000 470000 1000000		E1			F1					A1 C1				A1	A1 C1		

<Standard Capacitance Value>

E3 Series

Please contact for capacitance value other than standard.

Two digits alphanumeric in capacitance chart denote dimensions and tan δ . Please refer to the below table for detail.

(Example)

In case of "E1" for CF21;

L : 2.0±0.1mm

W : 1.25±0.1mm

T : 0.85±0.1mm

Tan δ : 2.5% max.

Size	Size Code	Dimension (mm)		
		L	W	T
21	E	2.0±0.10	1.25±0.10	0.85±0.10
	F	2.0±0.10	1.25±0.10	1.05±0.10
	G	2.0±0.10	1.25±0.10	1.25±0.10
316	C	3.2±0.20	1.6±0.15	1.15±0.10
	D	3.2±0.20	1.6±0.15	1.25±0.10
	E	3.2±0.20	1.6±0.15	1.6±0.15
32	D	3.2±0.30	2.5±0.20	1.6±0.15
	F	3.2±0.30	2.5±0.20	2.0±0.2

Size	Size Code	Dimension (mm)		
		L	W	T
42	B	4.5±0.20	2.0±0.20	2.2 max.
43	A	4.5±0.30	3.2±0.20	2.0 max.
	C	4.5±0.30	3.2±0.20	2.5 max.
55	A	5.7±0.40	5.0±0.40	2.0 max.
	B	5.7±0.40	5.0±0.40	2.5 max.
	C	5.7±0.40	5.0±0.40	2.8 max.

Tan δ Code	Tan δ
1	2.5% max.



Test Conditions and Specifications for Temperature Compensation Type (CΔ Characteristics) CM/ CU/ CF Series

Test Items		Test Conditions	Specifications									
Capacitance Value (C)		<table><tr><th>Capacitance</th><th>Frequency</th><th>Volt</th></tr><tr><td>C≤1000pF</td><td>1MHz±10%</td><td rowspan="2">0.5 to 5Vrms</td></tr><tr><td>C>1000pF</td><td>1kHz±10%</td></tr></table>	Capacitance	Frequency	Volt	C≤1000pF	1MHz±10%	0.5 to 5Vrms	C>1000pF	1kHz±10%	Within tolerance	
Capacitance	Frequency	Volt										
C≤1000pF	1MHz±10%	0.5 to 5Vrms										
C>1000pF	1kHz±10%											
Q			C≥30pF : Q≥1000 C<30pF : Q≥400+20C									
Insulation Resistance (IR)		Measured after the rated voltage is applied for 1 minute at room ambient. For the rated voltage of over 630V, apply 500V for 1 minute at room ambient. The charge and discharge current of the capacitor must not exceed 50mA.	Over 10000MΩ or 500MΩ • μF, whichever is less									
Dielectric Resistance		Apply 3 times of the rated voltage for 1 to 5 seconds. Apply 1.5 times when the rated voltage is 250V or over. Apply 1.2 times when the rated voltage is 630V or over. The charge and discharge current of the capacitor must not exceed 50mA.	No problem observed									
Appearance		Microscope	No problem observed									
Termination Strength		Apply a sideward force of 500g (5N) to a PCB-mounted sample. Apply 2N for 0201, and 1N for 01005 size.	No problem observed									
Bending Strength		Glass epoxy PCB: Fulcrum spacing: 90mm, duration time 10 seconds.	No significant damage at 1mm bent									
Vibration Test	Appearance	Vibration frequency: 10 to 55 (Hz) Amplitude: 1.5mm Sweeping condition: 10→55→10Hz/ 1 minute in X, Y and Z Directions: 2 hours each, 6 hours total.	No problem observed									
	ΔC		Within Tolerance									
	Q		C≥30pF : Q≥1000 C<30pF : Q≥400+20C									
Soldering Heat Resistance	Appearance	Soak the sample in 260°C±5°C solder for 10±0.5 seconds and place in room ambient, and measure after 24±2 hours. (Pre-heating conditions) <table><tr><th>Order</th><th>Temperature</th><th>Time</th></tr><tr><td>1</td><td>80 to 100°C</td><td>2 minutes</td></tr><tr><td>2</td><td>150 to 200°C</td><td>2 minutes</td></tr></table> The charge and discharge current of the capacitor must not exceed 50mA for IR and withstanding voltage measurement.	Order	Temperature	Time	1	80 to 100°C	2 minutes	2	150 to 200°C	2 minutes	No problem observed
	Order		Temperature	Time								
	1		80 to 100°C	2 minutes								
	2		150 to 200°C	2 minutes								
	ΔC		Within ±2.5% or ±0.25pF, whichever is larger									
Q	C≥30pF : Q≥1000 C<30pF : Q≥400+20C											
IR	Over 10000MΩ or 500MΩ • μF whichever is less											
Withstanding Voltage	Resist without problem											
Solderability		Soaking condition <table><tr><td>Sn-3Ag-0.5Cu</td><td>245±5°C</td><td>3±0.5 sec.</td></tr><tr><td>Sn63 Solder</td><td>235±5°C</td><td>2±0.5 sec.</td></tr></table>	Sn-3Ag-0.5Cu	245±5°C	3±0.5 sec.	Sn63 Solder	235±5°C	2±0.5 sec.	Solder coverage : 90% min.			
Sn-3Ag-0.5Cu	245±5°C	3±0.5 sec.										
Sn63 Solder	235±5°C	2±0.5 sec.										
Temperature Cycle	Appearance	(Cycle) Room temperature (3min.)→ Lowest operation temperature (30min.)→ Room temperature (3min.)→ Highest operation temperature(30min.) After 5 cycles, measure after 24±2 hours. The charge and discharge current of the capacitor must not exceed 50mA for IR and withstanding voltage measurement.	No problem observed									
	ΔC		Within ±2.5% or ±0.25pF, whichever is larger									
	Q		C≥30pF : Q≥1000 C<30pF : Q≥400+20C									
	IR		Over 10000MΩ or 500MΩ • μF, whichever is less									
	Withstanding Voltage		Resist without problem									
Load Humidity Test (Except CF Series)	Appearance	After applying rated voltage for 500+12/-0 hours in pre-condition at 40°C±2°C, humidity 90 to 95%RH, allow parts to stabilize for 24±2 hours, at room temperature before measurement. The charge and discharge current of the capacitor must not exceed 50mA for IR measurement.	No problem observed									
	ΔC		Within ±7.5% or ±0.75pF, whichever is larger									
	Q		C≥30pF : Q≥200 C<30pF : Q≥100+10C/ 3									
	IR		Over 500MΩ or 25MΩ • μF, whichever is less									
High-Temperature with Loading	Appearance	After applying twice the rated voltage at the temperature of 125±3°C for 1000+12/-0 hours, measure the sample after 24±2 hours. Apply 1.5 times when the rated voltage is 250V or over. Apply 1.2 times when the rated voltage is 630V or over. The charge and discharge current of the capacitor must not exceed 50mA for IR measurement.	No problem observed.									
	ΔC		Within ±3% or ±0.3pF, whichever is larger									
	Q		C≥30pF : Q≥350 10pF<C<30pF : Q≥275+5C/ 2 C<10pF : Q≥200+10C									
	IR		Over 1000MΩ or 50MΩ • μF, whichever is less									

Please ask for individual specification for the hatched range in previous chart.



Test Conditions and Specifications for High Dielectric Type (X5R, X7R) CM/ CT Series

Test Items		Test Conditions	Specifications									
Capacitance Value (C)		Measure after heat treatment	Within tolerance									
Tanδ (%)		<table><tr><th>Capacitance</th><th>Frequency</th><th>Volt</th></tr><tr><td>C≤10μF</td><td>1kHz±10%</td><td>1.0±0.2Vrms</td></tr><tr><td>C>10μF</td><td>120Hz±10%</td><td>0.5±0.2Vrms</td></tr></table>	Capacitance	Frequency	Volt	C≤10μF	1kHz±10%	1.0±0.2Vrms	C>10μF	120Hz±10%	0.5±0.2Vrms	Refer to capacitance chart
	Capacitance	Frequency	Volt									
	C≤10μF	1kHz±10%	1.0±0.2Vrms									
C>10μF	120Hz±10%	0.5±0.2Vrms										
Insulation Resistance (IR)		Measured after the rated voltage is applied for 1 minute at room ambient. The charge and discharge current of the capacitor must not exceed 50mA.	Over 10000MΩ or 500MΩ • μF, whichever is less									
Dielectric Resistance		Apply 2.5 times of the rated voltage for 1 to 5 seconds. The charge and discharge current of the capacitor must not exceed 50mA.	No problem observed									
Appearance		Microscope	No problem observed									
Termination Strength		Apply a sideward force of 500g (5N) to a PCB-mounted sample. note : 2N for 0201 size in for 01005 size. Exclude CT series with thickness of less than 0.66mm.	No problem observed									
Bending Strength		Glass epoxy PCB: Fulcrum spacing: 90mm, duration time 10 seconds. Exclude CT series with thickness of less than 0.66mm.	No significant damage at 1mm bent									
Vibration Test	Appearance	Take the initial value after heat treatment.	No problem observed									
	ΔC	Vibration frequency: 10 to 55 (Hz) Amplitude: 1.5mm	Within tolerance									
	Tanδ (%)	Sweeping condition: 10→55→10Hz/ 1 minute in X, Y and Z Directions: 2 hours each, 6 hours total.	Within tolerance									
Soldering Heat Resistance	Appearance	Take the initial value after heat treatment.	No problem observed									
	ΔC	Soak the sample in 260°C±5°C solder for 10±0.5 seconds and place in room ambient, and measure after 24±2 hours.	Within ±7.5%									
	Tanδ (%)	(Pre-heating conditions)	Within tolerance									
	IR		Over 10000MΩ or 500MΩ • μF, whichever is less									
	Withstanding Voltage	<table><tr><th>Order</th><th>Temperature</th><th>Time</th></tr><tr><td>1</td><td>80 to 100°C</td><td>2 minutes</td></tr><tr><td>2</td><td>150 to 200°C</td><td>2 minutes</td></tr></table> The charge and discharge current of the capacitor must not exceed 50mA for IR and withstanding voltage measurement.	Order	Temperature	Time	1	80 to 100°C	2 minutes	2	150 to 200°C	2 minutes	Resist without problem
Order	Temperature	Time										
1	80 to 100°C	2 minutes										
2	150 to 200°C	2 minutes										
Solderability		Soaking condition <table><tr><th>Sn-3Ag-0.5Cu</th><th>245±5°C</th><th>3±0.5 sec.</th></tr><tr><th>Sn63 Solder</th><th>235±5°C</th><th>2±0.5 sec.</th></tr></table>	Sn-3Ag-0.5Cu	245±5°C	3±0.5 sec.	Sn63 Solder	235±5°C	2±0.5 sec.	Solder coverage : 90% min.			
Sn-3Ag-0.5Cu	245±5°C	3±0.5 sec.										
Sn63 Solder	235±5°C	2±0.5 sec.										
Temperature Cycle	Appearance	Take the initial value after heat treatment.	No problem observed									
	ΔC	(Cycle)	Within ±7.5%									
	Tanδ (%)	Room temperature (3min.)→	Within tolerance									
	IR	Lowest operation temperature (30min.)→ Room temperature (3min.)→	Over 10000MΩ or 500MΩ • μF, whichever is less									
	Withstanding Voltage	Highest operation temperature(30min.) After 5 cycles, measure after 24±2 hours. The charge and discharge current of the capacitor must not exceed 50mA for IR and withstanding voltage measurement.	Resist without problem									
Load Humidity Test	Appearance	Take the initial value after voltage treatment.	No problem observed									
	ΔC	After applying rated voltage for 500+12/ -0 hours in pre-condition at 40°C±2°C, humidity 90 to 95%RH, allow parts to stabilize for 24±2 hours, at room temperature before measurement.	Within ±12.5%									
	Tanδ (%)	The charge and discharge current of the capacitor must not exceed 50mA for IR measurement.	200% max. of initial value									
High-Temperature with Loading	IR	Over 500MΩ or 25MΩ • μF, whichever is less										
	Appearance	Take the initial value after voltage treatment.	No problem observed									
	ΔC	After applying twice the rated voltage at the highest operation temperature for 1000+12/ -0 hours, measure the sample after 24±2 hours.	Within ±12.5%									
	Tanδ (%)	The charge and discharge current of the capacitor must not exceed 50mA for IR measurement.	200% max. of initial value									
		Apply 1.5 times when the rated voltage is 10V or less. Applied voltages for respective products are indicated in the below chart.	Over 1000MΩ or 50MΩ • μF, whichever is less									
Pre-treat-ment	Heat	Keep specimen at 150+0/ -10°C for 1 hour, leave specimen at room ambient for 24±2 hours.										
	Voltage	Apply the same test condition for 1 hour, then leave the specimen at room ambient for 24±2 hours.										

High-temperature with Loading Applied Voltage (Rated Voltage × □)

Applied Voltage	Rated Voltage	Products
×1.3	4V	CT03X5R104
	6.3V	CM105X5R475, CM316X5R476, CM02X5R153-104 CT05X5R104, CT21X5R106, CT03X5R104
×1.5	16V	CM02X7R101-222, CM05X7R333-104, CM105X7R474-105, CM21X7R105-475, CM316X7R475-106, CM32X7R106-226, CM05X5R224, CM105X5R225, CM21X5R475-106, CM316X5R226 CT105X5R105, CT21X5R225-475, CT316X5R106, CM03X5R332-103, CM02X5R101-103
	25V	CM105X7R474, CM21X7R105-225, CM316X7R475, CM32X7R106, CM105X5R474-105, CM21X5R225-106, CM316X5R106, CM32X5R106-226 CT316X5R225-106, CM03X5R152-103, CM05X7R103-104
	50V	CM21X5R105, CM32X5R106, CM32X7R106 CT21X5R225, CT316X5R105-475
	100V	CM32X7RK74, CM43X7R105

Please ask for individual specification for the hatched range in previous chart.




Test Conditions and Specifications for High Dielectric Type (X7R)

CF Series

Test Items		Test Conditions	Specifications									
Capacitance Value (C)		Measure after heat treatment	Within tolerance									
Tanδ (%)		<table><tr><th>Capacitance</th><th>Frequency</th><th>Volt</th></tr><tr><td>C≤10μF</td><td>1kHz±10%</td><td>1.0±0.2Vrms</td></tr></table>	Capacitance	Frequency	Volt	C≤10μF	1kHz±10%	1.0±0.2Vrms	Within ±2.5%			
Capacitance	Frequency	Volt										
C≤10μF	1kHz±10%	1.0±0.2Vrms										
Insulation Resistance (IR)		Measured after the rated voltage is applied for 1 minute at room ambient. Measured after the 500V is applied for 1 minute at room ambient for the rated voltage over 630V. The charge and discharge current of the capacitor must not exceed 50mA.	Over 10000MΩ or 500MΩ • μF, whichever is less Over 100MΩ • μF for CF316X7R104/ 250V and CF55X7R224/ 630V									
Dielectric Resistance		Apply 1.5 times when the rated voltage is 250V or over, apply 1.2 times when the rated voltage is 630V or over for 1 to 5 seconds. The charge and discharge current of the capacitor must not exceed 50mA.	No problem observed									
Appearance		Microscope	No problem observed									
Termination Strength		Apply a sideward force of 500g (5N) to a PCB-mounted sample.	No problem observed									
Bending Strength		Glass epoxy PCB: Fulcrum spacing: 90mm, duration time 10 seconds.	No significant damage at 1mm bent									
Vibration Test	Appearance	Take the initial value after heat treatment. Vibration frequency: 10 to 55 (Hz) Amplitude: 1.5mm Sweeping condition: 10→55→10Hz/ 1 minute in X, Y and Z Directions: 2 hours each, 6 hours total.	No problem observed									
	ΔC		Within tolerance									
	Tanδ (%)		Within tolerance									
Soldering Heat Resistance	Appearance	Take the initial value after heat treatment. Soak the sample in 260°C±5°C solder for 10±0.5 seconds and place in room ambient, and measure after 24±2 hours. (Pre-heating conditions) <table><tr><th>Order</th><th>Temperature</th><th>Time</th></tr><tr><td>1</td><td>80 to 100°C</td><td>2 minutes</td></tr><tr><td>2</td><td>150 to 200°C</td><td>2 minutes</td></tr></table> The charge and discharge current of the capacitor must not exceed 50mA for IR and withstanding voltage measurement.	Order	Temperature	Time	1	80 to 100°C	2 minutes	2	150 to 200°C	2 minutes	No problem observed
	Order		Temperature	Time								
	1		80 to 100°C	2 minutes								
	2		150 to 200°C	2 minutes								
	ΔC		Within ±7.5%									
Tanδ (%)	Within tolerance											
IR	Over 10000MΩ or 500MΩ • μF, whichever is less Over 100MΩ • μF for CF316X7R104/ 250V and CF55X7R224/ 630V											
Withstanding Voltage	Resist without problem											
Solderability		Soaking condition <table><tr><th>Sn-3Ag-0.5Cu</th><th>245±5°C</th><th>3±0.5 sec.</th></tr><tr><th>Sn63 Solder</th><th>235±5°C</th><th>2±0.5 sec.</th></tr></table>	Sn-3Ag-0.5Cu	245±5°C	3±0.5 sec.	Sn63 Solder	235±5°C	2±0.5 sec.	Solder coverage : 90% min.			
Sn-3Ag-0.5Cu	245±5°C	3±0.5 sec.										
Sn63 Solder	235±5°C	2±0.5 sec.										
Temperature Cycle	Appearance	Take the initial value after heat treatment. (Cycle) Room temperature (3min.)→ Lowest operation temperature (30min.)→ Room temperature (3min.)→ Highest operation temperature(30min.) After 5 cycles, measure after 24±2 hours. The charge and discharge current of the capacitor must not exceed 50mA for IR and withstanding voltage measurement.	No problem observed									
	ΔC		Within ±7.5%									
	Tanδ (%)		Within tolerance									
	IR		Over 10000MΩ or 500MΩ • μF, whichever is less Over 100MΩ • μF for CF316X7R104/ 250V and CF55X7R224/ 630V									
	Withstanding Voltage		Resist without problem									
High-Temperature with Loading	Appearance	Take the initial value after voltage treatment. After applying specified voltage at the highest operation temperature for 1000+12/ -0 hours, then measure the sample after 24±2 hours. The applied voltage shall be; 1.5 times the rated voltage when the rated voltage is 250V or over. 1.2 times when the rated voltage is 630V or over. The charge and discharge current of the capacitor must not exceed 50mA for IR measurement.	No problem observed									
	ΔC		Within ±12.5%									
	Tanδ (%)		200% max. of initial value									
	IR		Over 1000MΩ or 50MΩ • μF, whichever is less									
Pre-treat-ment	Heat	Keep specimen at 150+0/ -10°C for 1 hour, leave specimen at room ambient for 24±2 hours.										
	Voltage	Apply the same test condition for 1 hour, then leave the specimen at room ambient for 24±2 hours.										

Substrate for Electrical Tests


(Unit: mm)

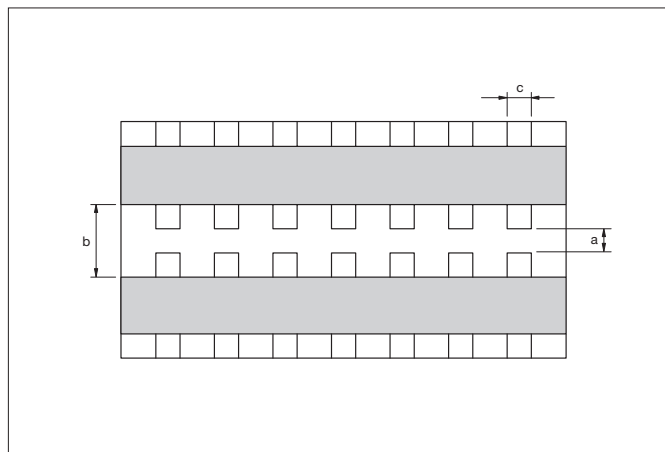

Size (EIA Code)	a	b	c
02 (01005)	0.15	0.50	0.20
03 (0201)	0.26	0.92	0.32
05 (0402)	0.4	1.4	0.5
105 (0603)	1.0	3.0	1.2
21 (0805)	1.2	4.0	1.65
316 (1206)	2.2	5.0	2.0
32 (1210)	2.2	5.0	2.9
42 (1808)	3.5	7.0	3.7
43 (1812)	3.5	7.0	3.7
52 (2208)	4.5	8.0	5.6
55 (2220)	4.5	8.0	5.6


Substrate for Bending Test

(Unit: mm)

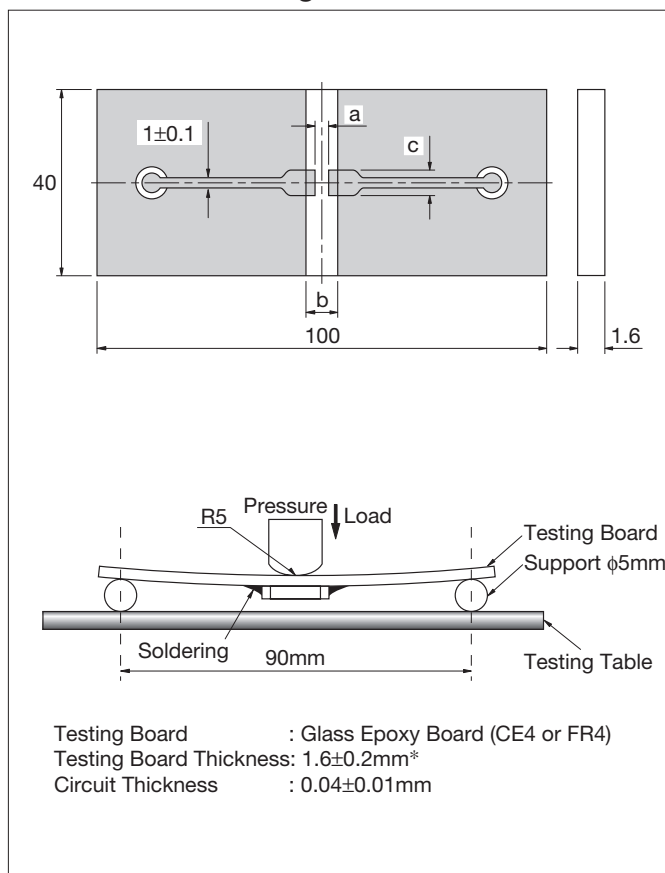


* 02, 03, 05 size 0.8±0.1mm

Substrate for Adhesion Strength Test

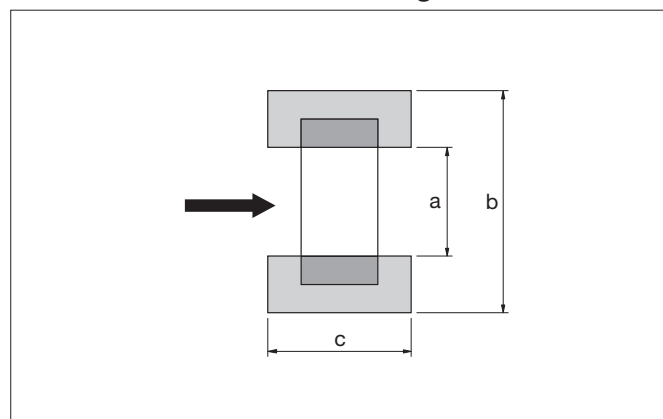


Tape and Reel


- Reel




F=1mm (02 Type)

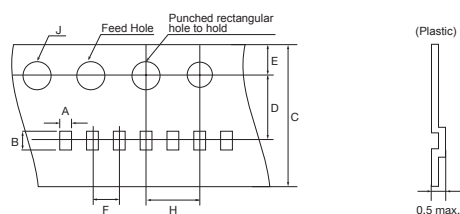


F=1mm (02, 03, 05 Type)

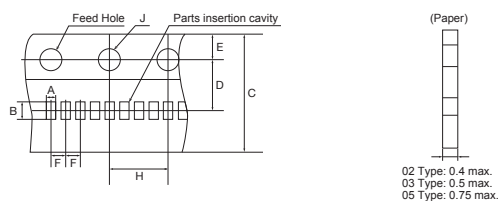


F=2mm (02, 03, 05, 105 Type)

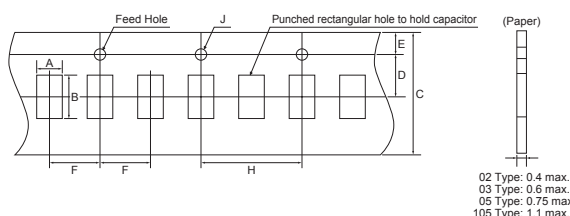

F=4mm (105, 21, 316, 32, 42, 52 Type)

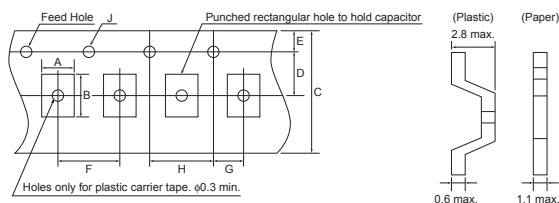

F=8mm (43, 55 Type)

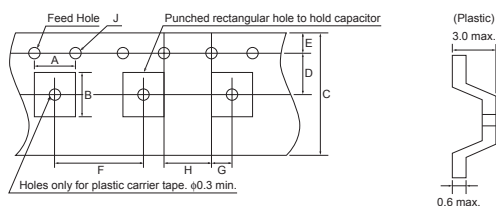

Reel

(Unit: mm)

Code Reel	A	B	C	D
7-inch Reel (CODE: T, H, Q)	180 ⁺⁰ _{-2.0}	ø60 min.	13±0.5	21±0.8
7-inch Reel (CODE: P)	178±2.0			
13-inch Reel (CODE: L, N, W)	330±2.0			
Code Reel	E	W ₁	W ₂	R
7-inch Reel (CODE: T, H, Q)	2.0±0.5	10.5±1.5	16.5 max.	1.0
7-inch Reel (CODE: P)		4.35±0.3	6.95±1.0	
13-inch Reel (CODE: L, N, W)		9.5±1.0	16.5 max.	

* Carrier tape width 8mm.

For size 42 (1808) or over, Tape width 12mm and W1: 14±1.5, W2: 18.4mm max.

Carrier Tape

(Unit: mm)

Size (EIA Code)	A	B	F
02 (01005)*	0.23±0.02	0.43±0.02	1.0±0.02
	0.25±0.03	0.45±0.03	2.0±0.05
03 (0201)*	0.37±0.03	0.67±0.03	1.0±0.05
			2.0±0.05
05 (0402)*	0.65±0.1	1.15±0.1	1.0±0.05
			2.0±0.05
105 (0603)	1.0±0.2	1.8±0.2	4.0±0.1
21 (0805)	1.5±0.2	2.3±0.2	4.0±0.1
316 (1206)	2.0±0.2	3.6±0.2	4.0±0.1
32 (1210)	2.9±0.2	3.6±0.2	4.0±0.1
42 (1808)	2.4±0.2	4.9±0.2	4.0±0.1
43 (1812)	3.6±0.2	4.9±0.2	8.0±0.1
52 (2208)	2.4±0.2	6.0±0.2	4.0±0.1
55 (2220)	5.3±0.2	6.0±0.2	8.0±0.1


* Option

(Unit: mm)

F	Carrier Tape	C	D	E	G	H	J
1.0 ±0.02	4mm Plastic	4.0 +0.08	1.8 ±0.02	0.9 ±0.05	—	2.0 ±0.04	0.8 ±0.04
1.0 ±0.05	8mm Paper	8.0 +0.3/ -0.1	3.5 ±0.05	1.75 ±0.1	2.0 ±0.05	4.0 ±0.05	1.5 +0.1/ -0
2.0 ±0.05		8.0 ±0.3				4.0 ±0.1	
4.0 ±0.1		8mm Plastic					
8.0 ±0.1	12mm Plastic	12.0 ±0.3	5.5 ±0.05				




Detail of leader and trailer

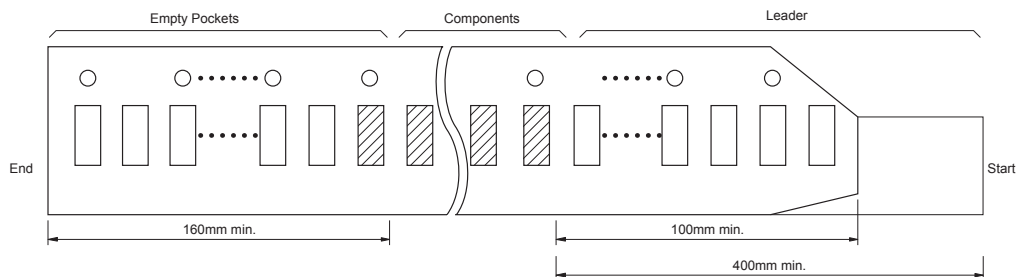

Adhesive tape


- 1) The exfoliative strength when peeling off the top tape from the carrier tape by the method of the following figure shall be ≈ 0.1 to $0.7N$. *02 Size: 0.1 to $0.5N$
- 2) When the top tape is peeled off, the adhesive stays on the top tape.
- 3) Chip capacitors will be in a state free without being stuck on the thermal adhesive tape.

Exfoliating angle: 165 to 180 degrees to the carrier tape.
Exfoliating speed: 300 mm/min.

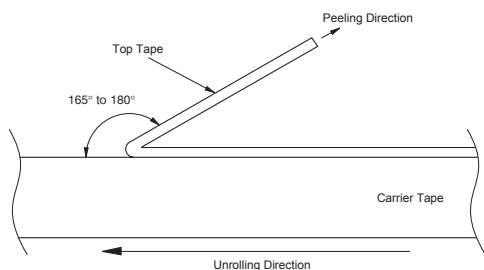

Bulk Case

(Unit: mm)

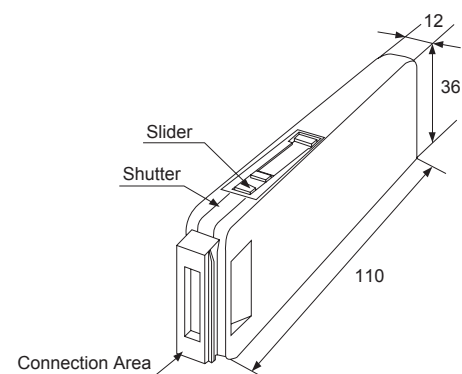

- Please contact Kyocera for details.




Dimensions for recommended typical land

Since the amount of solder (size of fillet) to be used has direct influence on the capacitor after mounting, the sufficient consideration is necessary.

When the amounts of solder is too much, the stress that a capacitor receives becomes larger. It may become the cause of a crack in the capacitor. When the land design of printed wiring board is considered, it is necessary to set up the form and size of land pattern so that the amount of solder is suitable.

(General, High-Voltage)

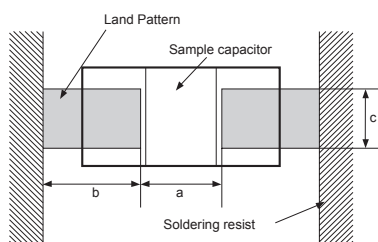

General, High-Voltage

(Unit: mm)


Size (EIA Code)	L×W	a	b	c
02 (01005)	0.4×0.2	0.13 to 0.20	0.12 to 0.18	0.20 to 0.23
03 (0201)	0.6×0.3	0.20 to 0.30	0.25 to 0.35	0.30 to 0.40
05 (0402)	1.0×0.5	0.30 to 0.50	0.35 to 0.45	0.40 to 0.60
105 (0603)	1.6×0.8	0.70 to 1.00	0.80 to 1.00	0.60 to 0.80
21 (0805)	2.0×1.25	1.00 to 1.30	1.00 to 1.20	0.80 to 1.10
316 (1206)	3.2×1.6	2.10 to 2.50	1.10 to 1.30	1.00 to 1.30
32 (1210)	3.2×2.5	2.10 to 2.50	1.10 to 1.30	1.90 to 2.30
42 (1808)	4.5×2.0	2.50 to 3.20*1	1.80 to 2.30	1.50 to 1.80
43 (1812)	4.5×3.2	2.50 to 3.20*1	1.80 to 2.30	2.60 to 3.00
52 (2208)	5.7×2.0	4.20 to 4.70	2.00 to 2.50	1.50 to 1.80
55 (2220)	5.7×5.0	4.20 to 4.70	2.00 to 2.50	4.20 to 4.70

*1 Dimension of 3.0 to 3.5mm is recommended for "a", in the case of High-Voltage products.

Design of printed circuit and Soldering

The recommended fillet height shall be 1/2 of the thickness of capacitors or 0.5mm. When mounting two or more capacitors in the common land, it is necessary to separate the land with the solder resist strike so that it may become the exclusive land of each capacitor.

Ideal Solder Height

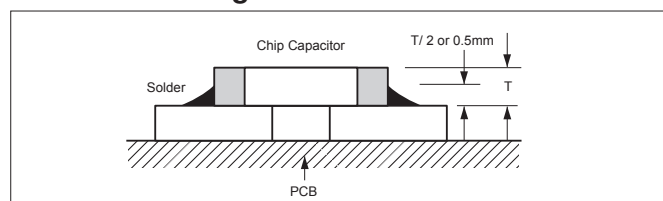



Item	Not recommended example	Recommended example/ Separated by solder
Multiple parts mount		
Mount with leaded parts		
Wire soldering after mounting		
Overview		



Mounting Design



The chip could crack if the PCB warps during processing after the chip has been soldered.

Recommended chip position on PCB to minimize stress from PCB warpage

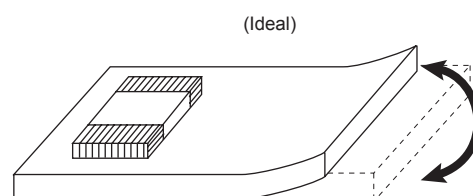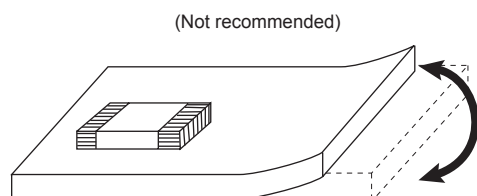

Actual Mounting

- 1) If the position of the vacuum nozzle is too low, a large force may be applied to the chip capacitor during mounting, resulting in cracking.
- 2) During mounting, set the nozzle pressure to a static load of 1 to 3 N.
- 3) To minimize the shock of the vacuum nozzle, provide a support pin on the back of the PCB to minimize PCB flexure.

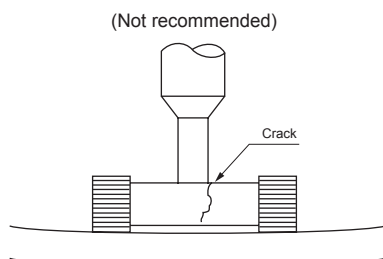

- 4) Bottom position of pick up nozzle should be adjusted to the top surface of a substrate which camber is corrected.
- 5) To reduce the possibility of chipping and cracks, minimize vibration to chips stored in a bulk case.
- 6) The discharge pressure must be adjusted to the part size. Verify the pressure during setup to avoid fracturing or cracking the chips capacitors.

Resin Mold

- 1) If a large amount of resin is used for molding the chip, cracks may occur due to contraction stress during curing. To avoid such cracks, use a low shrinkage resin.
- 2) The insulation resistance of the chip will degrade due to moisture absorption. Use a low moisture absorption resin.
- 3) Check carefully that the resin does not generate a decomposition gas or reaction gas during the curing process or during normal storage. Such gases may crack the chip capacitor or damage the device itself.




Soldering Method

- 1) Ceramic is easily damaged by rapid heating or cooling. If some heat shock is unavoidable, preheat enough to limit the temperature difference (Delta T) to within 150 degree Celsius.
- 2) The product size 1.6×0.8mm to 3.2×1.6mm can be used in reflow and wave soldering, and the product size of bigger than 3.2×1.6mm, or smaller than 1.6×0.8mm can be used in reflow.
Circuit shortage and smoking can be created by using capacitors which are used neglecting the above caution.
- 3) Please see our recommended soldering conditions.
- 4) In case of using Sn-Zn Solder, please contact us in advance.
- 5) The following condition is recommended for spot heater application.

• Recommended spot heater condition


Item	Condition
Distance	5mm min.
Angle	45°
Projection Temp.	400°C max.
Flow rate	Set at the minimum
Nozzle diameter	2φ to 4φ (Single hole type)
Application time	10 sec. max. (1206 and smaller) 30 sec. max. (1210 and larger)

How to point spot heater

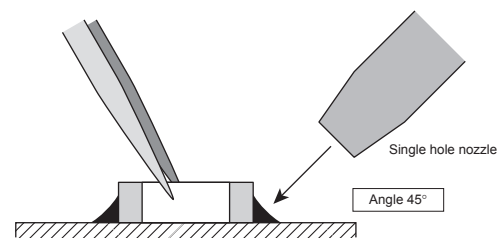


Recommended Temperature Profile (Sn-3Ag-0.5Cu)

Reflow

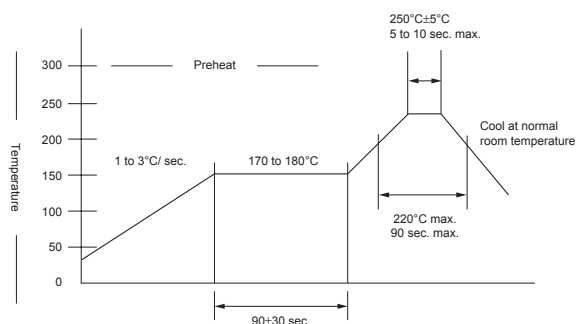

- ① Minimize soldering time.
- ② Ensure that allowable temperature difference does not exceed 150°C.
- ③ Ensure that allowable temperature difference does not exceed 130°C for 3.2×2.5mm size or larger.


Wave

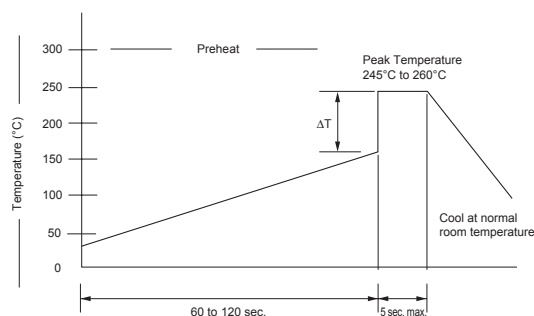

- ① Ensure that the chip capacitor is preheated adequately.
- ② Ensure that the temperature difference (ΔT) does not exceed 150°C.
- ③ Cool naturally after soldering.
- ④ Wave soldering is not applicable for chips with size of 3.2×2.5mm or larger of 1.0×0.5mm or smaller and capacitor arrays.


Recommended Temperature Profile (62Sn Solder)

Reflow

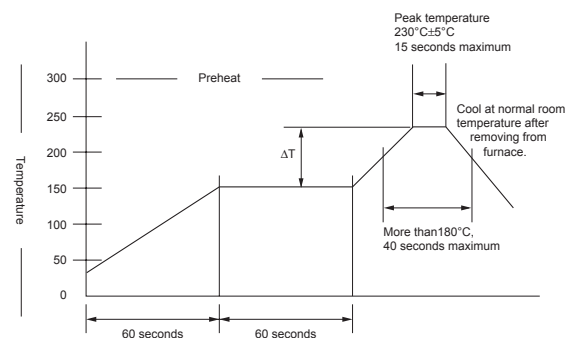

- ① Minimize soldering time.
- ② Ensure that the temperature difference (ΔT) does not exceed 150°C.
- ③ Ensure that the temperature difference (ΔT) does not exceed 130°C for 3.2×2.5mm size or larger.
- ④ MLCC can withstand the above reflow conditions up to 3 times.

Wave

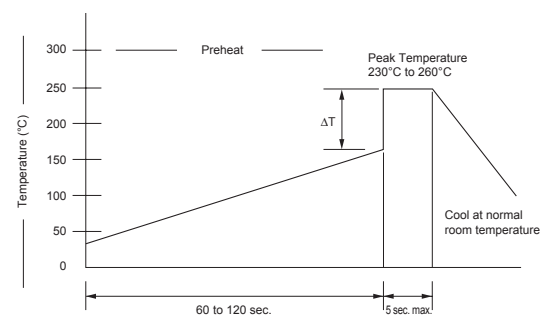

- ① Ensure that the chip capacitor is preheated adequately.
- ② Ensure that the temperature difference (ΔT) does not exceed 150°C.
- ③ Cool naturally after soldering.
- ④ Wave soldering is not applicable for chips with size of 3.2×2.5mm or larger of 1.0×0.5mm or smaller and capacitor arrays.

Soldering iron

- 1) Temperature of iron chip
 - 1206 and smaller 350°C max.
 - 1210 and larger 280°C max.
- 2) Wattage
 - 80W max.
- 3) Tip shape of soldering iron
 - φ3.0mm max.
- 4) Soldering Time
 - 3 sec. max.
- 5) Cautions
 - a) Pre-heating is necessary rapid heating must be avoided.
Delta T≤150°C (product size of bigger than 3.2×1.6mm. Delta T≤130°C)
 - b) Avoid direct touching to capacitors.
 - c) Avoid rapid cooling after soldering. Natural cooling is recommended.

*Consult as if it is difficult to keep the temperature 280°C max. for 1210 and larger MLCC'S.



Circuit Design

1. Once application and assembly environments have been checked, the capacitor may be used in conformance with the rating and performance which are provided in both the catalog and the specifications. Use exceeding that which is specified may result in inferior performance or cause a short, open, smoking, or flaming to occur, etc.
2. Please consult the manufacturer in advance when the capacitor is used in devices such as: devices which deal with human life, i.e. medical devices; devices which are highly public orientated; and devices which demand a high standard of liability.
Accident or malfunction of devices such as medical devices, space equipment and devices having to do with atomic power could generate grave consequence with respect to human lives or, possibly, a portion of the public. Capacitors used in these devices may require high reliability design different from that of general purpose capacitors.
3. Please use the capacitors in conformance with the operating temperature provided in both the catalog and the specifications.
Be especially cautious not to exceed the maximum temperature. In the situation the maximum temperature set forth in both the catalog and specifications is exceeded, the capacitor's insulation resistance may deteriorate, power may suddenly surge and short-circuit may occur. The capacitor has a loss, and may self-heat due to equivalent series resistance when alternating electric current is passed therethrough. As this effect becomes especially pronounced in high frequency circuits, please exercise caution.
When using the capacitor in a (self-heating) circuit, please make sure the surface of the capacitor remains under the maximum temperature for usage. Also, please make certain temperature rises remain below 20°C.
4. Please keep voltage under the rated voltage which is applied to the capacitor. Also, please make certain the peak voltage remains below the rated voltage when AC voltage is super-imposed to the DC voltage.
In the situation where AC or pulse voltage is employed, ensure average peak voltage does not exceed the rated voltage.
Exceeding the rated voltage provided in both catalog and specifications may lead to defective withstanding voltage or, in worst case situations, may cause the capacitor to smoke or flame.
5. When the capacitor is to be employed in a circuit in which there is continuous application of a high frequency voltage or a steep pulse voltage, even though it is within the rated voltage, please inquire to the manufacturer.
In the situation the capacitor is to be employed using a high frequency AC voltage or a extremely fast rising pulse voltage, even though it is within the rated voltage, it is possible capacitor reliability will deteriorate.
6. It is a common phenomenon of high-dielectric products to have a deteriorated amount of static electricity due to the application of DC voltage.
Due caution is necessary as the degree of deterioration varies depending on the quality of capacitor materials, capacity, as well as the load voltage at the time of operation.
7. Do not use the capacitor in an environment where it might easily exceed the respective provisions concerning shock and vibration specified in the catalog and specifications.
In addition, it is a common piezo phenomenon of high dielectric products to have some voltage due to vibration or to have noise due to voltage change. Please contact sales in such case.
8. If the electrostatic capacity value of the delivered capacitor is within the specified tolerance, please consider this when designing the respective product in order that the assembled product function appropriately.
9. Please contact us upon using conductive adhesives.

Storage

1. If the component is stored in minimal packaging (a heat-sealed or zippered plastic bag), the bag should be kept closed. Once the bag has been opened, reseal it or store it in a desiccator.
2. Keep storage place temperature +5 to +40 degree C, humidity 20 to 70% RH. See JIS C 60721-3-1, class 1K2 for other climatic conditions.
3. The storage atmosphere must be free of corrosive gas such as sulfur dioxide and chlorine. Also, avoid exposing the product to saline moisture. If the product is exposed to such atmospheres, the terminals will oxidize and solderability will be effected.
4. Precautions 1) to 3) apply to chip capacitors packaged in carrier tapes and bulk cases.
5. The solderability is assured for 6 months from our shipping date if the above storage precautions are followed.
6. Chip capacitors may crack if exposed to hydrogen (H₂) gas while sealed or if coated with silicon, which generates hydrogen gas.

Safety application guideline and detailed information of electrical properties are also provided in Kyocera home page;

URL: <http://www.kyocera.co.jp/electronic/>