

CVPD-037X Model

5x7 mm SMD, 3.3V, LVPECL

Frequency Range:	40.000 to 170.000 MHz
Operating Temperature Range:	-40°C to 85°C
Storage Temperature Range:	-45°C to 90°C
Input Voltage:	3.3V ± 5%
Control Voltage:	1.65V ± 1.5V
Input Current:	56mA Max
Output:	PECL
Symmetry:	45/55% Max @ zero crossing point
Rise/Fall Time:	0.25nSec Typical, 0.5nSec Max, (20% to 80%)
Pullability APR:	±50ppm Min APR
Load:	50 ohms (Vdd-2.0V)
Logic "1" Level:	2.275 VDC Min
Logic "0" Level:	1.680 VDC Max
Modulation BW:	15 kHz Min
Input Impedance:	5 Mohm Min
Enable Delay Time:	2 mSec Max
Disable Delay Time:	200 nSec Max
Phase Noise (Typical for 160 MHz):	
10 Hz Offset:	-60 dBc/Hz
100 Hz Offset:	-90 dBc/Hz
1 kHz Offset:	-118 dBc/Hz
10 kHz Offset:	-134 dBc/Hz
100 kHz Offset:	-144 dBc/Hz
1 MHz Offset:	-150 dBc/Hz
10 MHz Offset:	-157 dBc/Hz
40 MHz Offset:	-157 dBc/Hz



Standard Frequencies (MHz)
100.000
122.880
153.600
156.250

Mechanical:

Shock:	MIL-STD-883, Method 2002, Condition B
Solderability:	MIL-STD-883, Method 2003
Vibration:	MIL-STD-883, Method 2007, Condition A
Solvent Resistance:	MIL-STD-202, Method 215
Resistance to Soldering Heat:	MIL-STD-202, Method 210, Condition I or J



Environmental:

Thermal Shock:	MIL-STD-883, Method 1011, Condition A
Moisture Resistance:	MIL-STD-883, Method 1004


Part Number Example: CVPD-037X-100.000 = 3.3V, ±50ppmAPR, 100 MHz

Dimensions inches (mm)

All dimensions are Max unless otherwise specified.

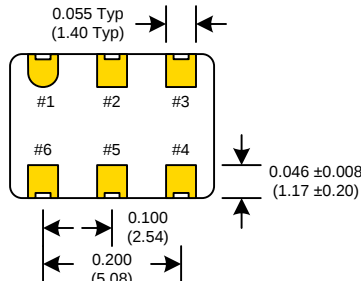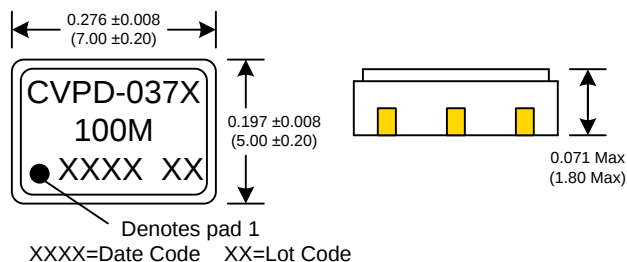


SUGGESTED PAD LAYOUT

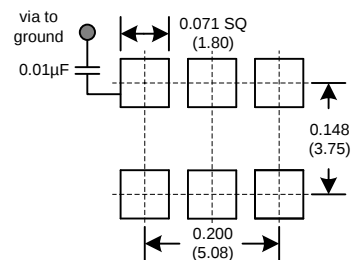

0.01µF Bypass Capacitor Recommended

RECOMMENDED REFLOW SOLDERING PROFILE

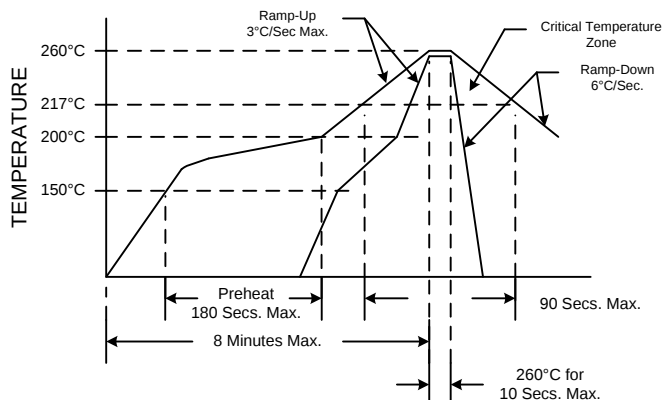

NOTE: Reflow Profile with 240°C peak also acceptable.

PIN	Connection
1	Cont. Volt
2	E/D
3	GND
4	Output
5	Comp Output
6	Vcc

Tristate Function	
Function pin 2	Output pin
Open	Active
"1" level 0.7×Vdd Min	Active
"0" level 0.3×Vdd Max	High Z

Available on 16mm Tape and Reel in quantities of 1,000 pcs.

Rev: C
Date: 24-Sep-2014
Page 1 of 1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com