



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER		TAB SIZE	WIRE RANGE mm ²	DIMENSIONS mm		
PREFIX	PKG			A ±.38	B ±.25	C ±.25
DM1-63M	-C -M	6,3 X 0,8 (.250 X .032)	0,5-1,0 (22-18)	19,2 (.76)	6,30 (.25)	0,76 (.03)
DM2-63M	-C -M	6,3 X 0,8 (.250 X .032)	1,5-2,5 (16-14)	19,2 (.76)	6,30 (.25)	0,76 (.03)
* DM6-63M	-L -D	6,3 X 0,8 (.250 X .032)	4,0-6,0 (12-10)	18,2 (.72)	6,30 (.25)	0,76 (.03)

NOTES:

- USED FOR:
A. 150° C (302° F) MAX. TEMP. RATING
B. STRANDED COPPER WIRE ONLY.
- PACKAGE QTY:
A. STD: -L = 50 -C = 100
B. BULK: -D = 500 -M = 1000
- MATERIAL:
A. STAMPING: ETP 110 COPPER, NICKEL PLATED
- WIRE STRIP LENGTH: 7,1 ^{+.8}₋₀ (9/32 ^{+1/32}₋₀)
- DIMENSIONS IN BRACKETS ARE IN INCHES OR AWG.
- INSTALLATION TOOLS: REF. DWGS.
A41522, A41523, A41524, A41525

* DM6-63M APPROVED FOR USE WITH 2.5 -6.0 WIRE
WHEN CRIMPED USING THE CT-570 & CT-1570 TOOLS

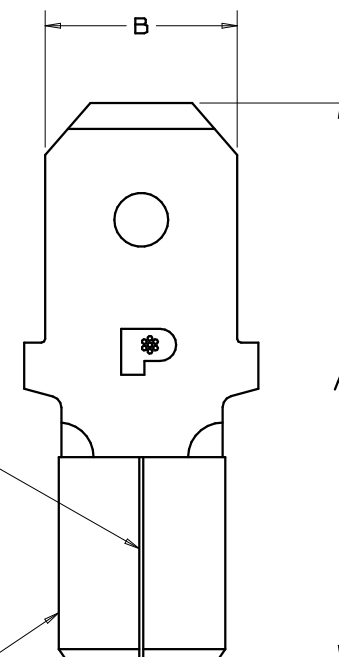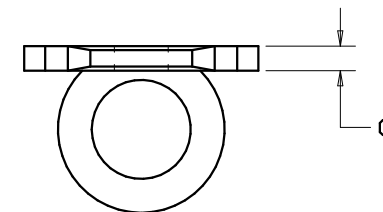

BRAZED SEAM, DM6-63M
BUTTED SEAM, DM1,2-63M

SERRATED BARREL
(DM1/DM2-63M ONLY)

06	2/07	DAW	DAW	NOTED (on illustration) BRAZED SEAM, DM6-63M, BUTTED SEAM DM1 & DM2-63M. ADDED SERRATED BARREL (DM1/DM2-63M ONLY)	TR00224	TRO	LCA	A41501_06
05	11/04	KLFU	SKB	WIRE RANGE 1,0 WAS 1,5; 2,5 4,0 WAS 2,5 ADDED MARKING 6,0	012453	TRO	SKB	
04	7/01	JAMB	RLS	ADDED PACKAGE QTY. -C = 100, -M = 1000	09500	TRO	JAC	PANDUIT CORP. TINLEY PARK, ILLINOIS METRIC NON-INSULATED MALE DISCONNECTS DM1-63M, DM2-63M, DM6-63M
03	10/97	TM	SKB	CHANGED DECIMAL POINTS TO COMMAS	06432	DH	LA	
02	2/97	JKD	SKB	ADDED DM1-63M & DM2-63M TO TABLE CHANGED TIN TO NICKEL PLATED IN NOTES	05702	DH	LA	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST	DRAWN BY JMV CHK'D LSM SCALE NONE DRAWING NO./CAD FILENAME A41501