


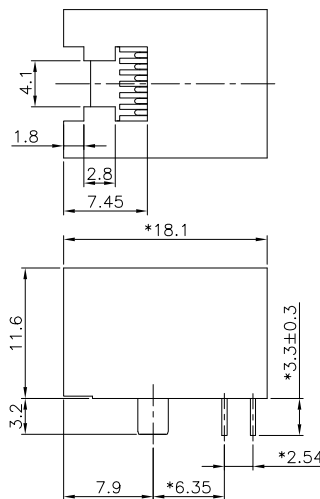



D1RFRD006



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD



NOTES:

ELECTRICAL:

- VOLTAGE RATING : 150 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 20 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON+30%G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46$ mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -20°C TO 85°C.
- WAVE SOLDER TEMPERATURE: 255-265°C (5-10 SECOND)

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL FILE NO. E163191

ROHS PART NUMBER: E536X-300XGX-L

2- 2C
4- 4C
6- 6C

1- 3u" 2- 6u" 3-15u"
4-30u" 5-50u"

MATERIAL OF HS'G :
4-FR50 BK
5-FR52 BK

MM (INCH)		DFTO BASS	DATE 8/28/'98
TOLERANCES EXCEPT AS NOTED		CHKD QIANPU	DATE 2005/3/17
		MFO	DATE
		APPV LUSHENG	DATE 2005/3/17
MM		MATERIAL :	
.00 ± 0.2		QT'Y :	
.00 ± 0.15		FINISH :	
.000 ± 0.075		SCALE : 3 : 1	
ANGLES ± 0.5		DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION		SHEET 1 OF 1	

FULL RISE ELECTRONIC CO., LTD

TITLE
11.5mm SIDE PCB JACK 6P

DRAWING NO. GE533022-LA

/PART NO. SEE NOTE

SIZE
A3REV
0

8

7

6

5

4

3

2

1

A

B

C

D

E

F

G

H