
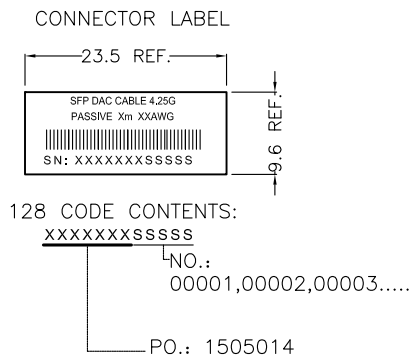


REV	DESCRIPTION	ECN NO.	NAME	DATE
0	FIRST RELEASE		Fude Wang	2015-10-09

SALES DRAWING

NOTICE:	ALL PARTS MUST MEET
RoHS ☒	TO RoHS REQUIREMENTS

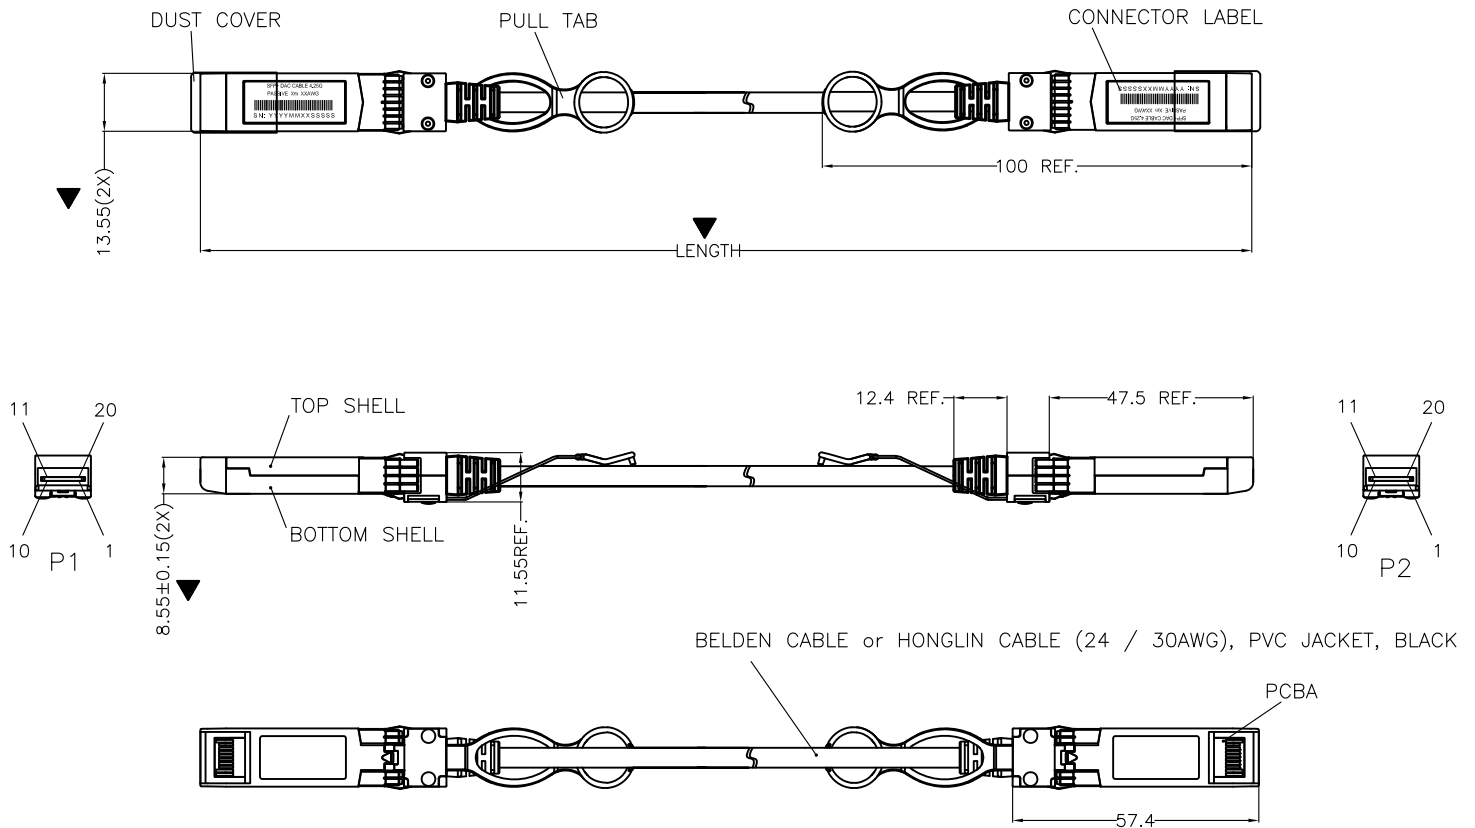

- NOTES:
- MATERIALS:
BACK SHELLS - NICKEL PLATED ZINC.(EDM)
PULL LATCH - NYLON.(BLUE)
PCB - ISOLA 370HR.
RIVETS - ALUMINUM ALLOY.
MASK PLANE - SUS 301.(NON LOGO)
EMI SHELL - SUS 301.
 - DIMENSION MARKED ▼ SHOULD CHECK BY QC.
 - SI TEST PLS REFER TO <WI-HSD-RD06-ES-006>
 - INTERFACE AND MATING DIMENSIONS REFER TO <SFF-8432>.

ESD BAG(SILVER COLOR)




TABLE1 :

NO.	SLK PN	Product description	LENGTH / MM	TOL / mm
1	SSP13000500PC-X2-XX	0.5 M, 30AWG, SFP-SFP	500	±30
2	SSP13001000PC-X2-XX	1 M, 30AWG, SFP-SFP	1000	±50
3	SSP13001500PC-X2-XX	1.5 M, 30AWG, SFP-SFP	1500	
4	SSP13002000PC-X2-XX	2 M, 30AWG, SFP-SFP	2000	
5	SSP13002500PC-X2-XX	2.5 M, 30AWG, SFP-SFP	2500	
6	SSP13003000PC-X2-XX	3 M, 30AWG, SFP-SFP	3000	±100
7	SSP12804000PC-X2-XX	4 M, 28AWG, SFP-SFP	4000	
8	SSP12605000PC-X2-XX	5 M, 26AWG, SFP-SFP	5000	
9	SSP12405000PC-X2-XX	5 M, 24AWG, SFP-SFP	5000	
10	SSP12406000PC-X2-XX	6 M, 24AWG, SFP-SFP	6000	
11	SSP12407000PC-X2-XX	7 M, 24AWG, SFP-SFP	7000	

RX-	12	19	TX-
RX+	13	18	TX+
TX+	18	13	RX+
TX-	19	12	RX-

WIRING TABLE

UNIT	MM	SCALE	N/A	PART NO.	
				/	
				APPROVED Billy Yan	
				CHECKED Maoqing	
				DRAWN Fude Wang	
				DATE 2015-10-09	TITLE SFP COPPER CABLE ASS'Y 4.25G DATA RATE, PASSIVE
					DRAWING NO. SSP1XX0XX00PC-X2-XX
					REV NO. 0
					Page 1/2

EEPROM	Parameter	Ref.	Internal Reference	
Data Address	Data code (HEX)	Value	Dec/Content	Notes / Description
0	03		3	
1	04		4	
2	21		33	
3	01		1	
4	00		0	
5	00		0	
6	00		0	
7	41		65	
8	00		0	
9	80		128	
10	15		21	
11	00		0	
12	2A	4.25G	42	Data rate of the cable
13	00		0	
14	00		0	
15	00		0	
16	00		0	
17	00		0	
18		xm	0	length of the cable
19	00		0	
20	4F	O	79	
21	45	E	69	
22	4D	M	77	
23	20		32	
24	20		32	
25	20		32	
26	20		32	
27	20		32	
28	20		32	
29	20		32	
30	20		32	
31	20		32	
32	20		32	
33	20		32	
34	20		32	
35	20		32	
36	00		0	
37	14		20	
38	1B		27	
39	BD		189	
40	53	S	83	
41	53	S	83	
42	50	P	80	
43	31	1	49	
44		X	0	
45		X	0	
46	30	0	48	
47		X	0	
48		X	0	
49	30	0	48	
50	30	0	48	
51	50	P	80	
52	43	C	67	
53	2D	-	45	
54	58	X	88	
55	32	2	50	
56	41	A	65	
57	20		32	
58	20		32	
59	20		32	
60	00		0	
61	00		0	
62	00		0	
63	00		0	check address
64	00		0	
65	00		0	
66	00		0	
67	00		0	

EEPROM	Parameter	Ref.	Internal Reference	
Data Address	Data code (HEX)	Value	Dec/Content	Notes / Description
68	00		0	
69	00		0	
70	00		0	
71	00		0	
72	00		0	
73	00		0	
74	00		0	
75	00		0	
76	00		0	
77	00		0	
78	00		0	
79	00		0	
80	00		0	
81	00		0	
82	00		0	
83	00		0	
84	00		0	
85	00		0	
86	00		0	
87	00		0	
88	00		0	
89	00		0	
90	00		0	
91	00		0	
92	00		0	
93	00		0	
94	00		0	
95	00		0	check address
96	00			
97	00			
98	00			
99	00			
100	00			
101	00			
102	00			
103	00			
104	00			
105	00			
106	00			
107	00			
108	00			
109	00			
110	00			
111	00			
112	00			
113	00			
114	FF			
115	FF			
116	FF			
117	FF			
118	FF			
119	FF			
120	FF			
121	FF			
122	FF			
123	FF			
124	FF			
125	FF			
126	FF			
127	FF			

TABLE 2:

NO.	SLK PN	Addresses				
		18	44	45	47	48
1	SSP13000500PC-X2-XX	01	33	30	30	35
2	SSP13001000PC-X2-XX	01	33	30	31	30
3	SSP13001500PC-X2-XX	02	33	30	31	35
4	SSP13002000PC-X2-XX	02	33	30	32	30
5	SSP13002500PC-X2-XX	03	33	30	32	35
6	SSP13003000PC-X2-XX	03	33	30	33	30
7	SSP12804000PC-X2-XX	04	32	38	34	30
8	SSP12605000PC-X2-XX	05	32	36	35	30
9	SSP12405000PC-X2-XX	05	32	34	35	30
10	SSP12406000PC-X2-XX	06	32	34	36	30
11	SSP12407000PC-X2-XX	07	32	34	37	30

- NOTES:
- CHECK ADDRESS(63&95) IS AUTOMATICALLY GENERATED.
 - DATE ADDRESS(84~91) IS AUTOMATICALLY GENERATED ACCORDING TO BURNING TIME(PC SYSTEM).
 - S/N ADDRESS(68~83) REFER TO CONNECTOR LABEL.

UNIT	MM	SCALE	N/A	PART NO.	/		
				APPROVED	Billy Yan		
≤0.5m ±30mm ≤4m ±50mm ≥4m ±80mm				CHECKED	Maoqing	TITLE SFP COPPER CABLE ASS'Y 4.25G DATA RATE, PASSIVE	
				DRAWN	Fude Wang	DRAWING NO. SSP1XX0XX00PC-X2-XX	
				DATE	2015-10-09	REV NO.	0