

SUMMARY

Wires

Low	0
High	6
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series	2B
Termination type	HV contact
IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	xxx



Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	EE*: Fixed receptacle, nut fixing (back panel mounting)
Keying	2 keys (alpha=37.5, plug: female contacts, receptacle: male contacts)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	Ø 0 - 0 mm
Variant	

Performance

Configuration	2B.436 : 6 High Voltage
Insulator	J: PEEK/PEEK
Rated Current	

Specifications

Contact Type:	Solder
Test voltage (kV DC)	9
Test voltage (kV AC)	6.4
Creepage dist.(mm):	4.7


Others

Temp (min / max):	-55°C / +250°C
-------------------	----------------

Humidity (max): <=95% [at 60 deg C / 140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Salt Spray Corrosion: >1000 hr
Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)
IP Rating: 50

DRAWINGS

Draws

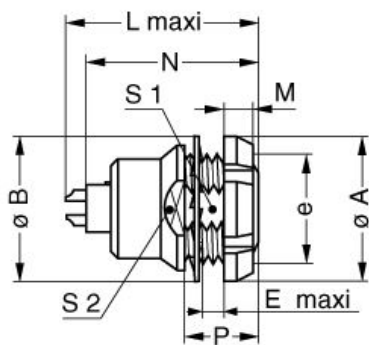

Dimensions

	A	B	E	L	M	N	P	S1	S2	e
mm.	20	20	3	26.7	3.5	24.6	9	13.5	15	M15x1.0
in.	0,79	0,79	0,12	1,05	0,14	0,97	0,35	0,53	0,59	

RECOMMENDED BY LEMO

Tools

None

Cables