
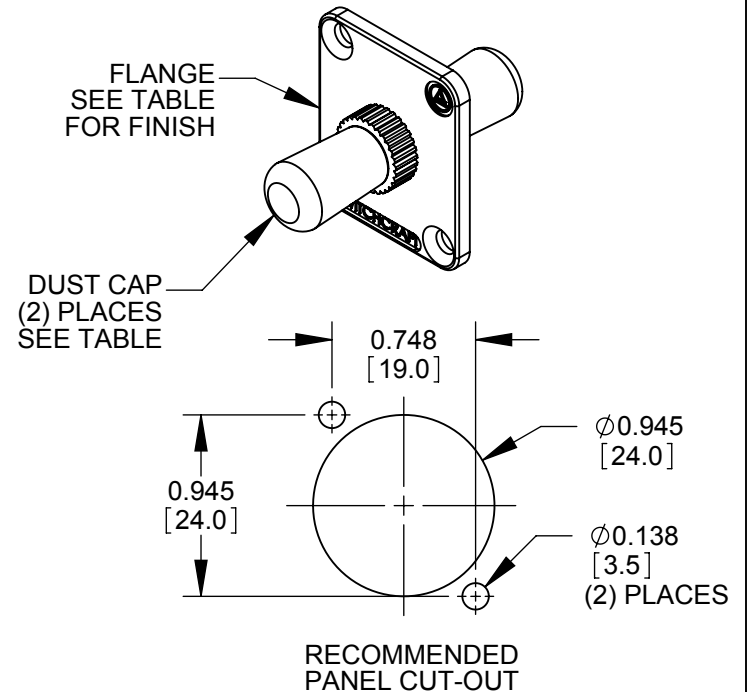
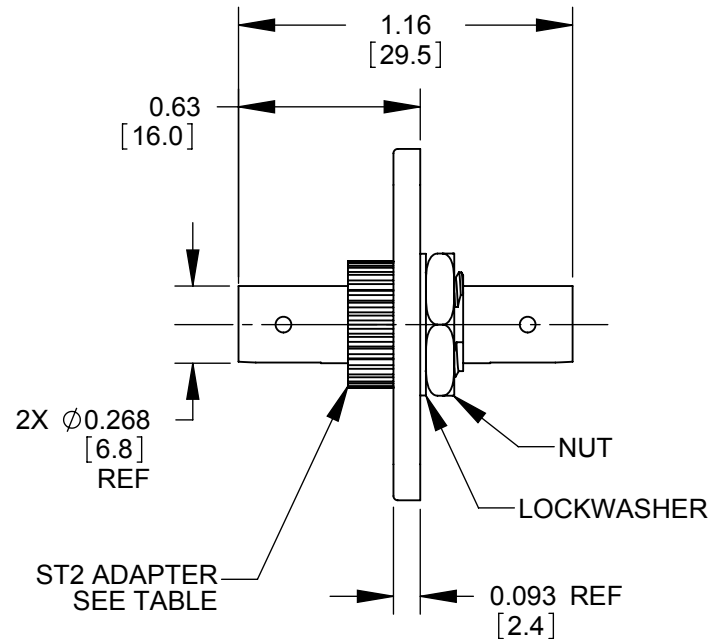


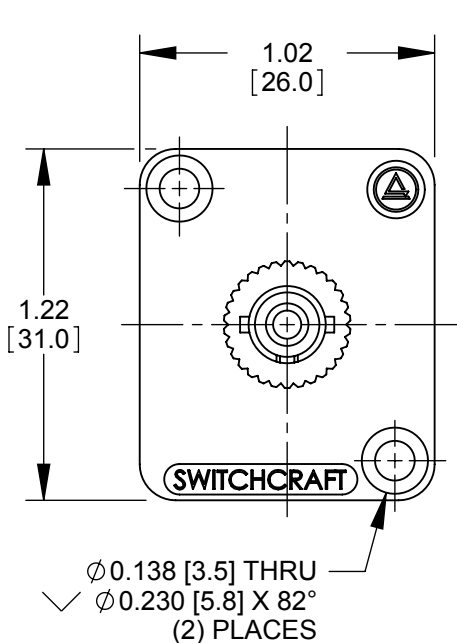

NOTES:

1. INSERTION LOSS: 0.25 dB MAX.
2. OPERATION TEMP: -40°C TO +80°C.
3. MATERIALS:
ST2 ADAPTER:
BODY - ZINC ALLOY
RETENTION WASHER - BRASS, NICKEL PLATED
SLEEVE - CERAMIC, SINGLE-MODE
- COPPER ALLOY, MULTI-MODE
DUST CAPS - PVC
NUT - COPPER ALLOY, NICKEL PLATED
LOCKWASHER - STEEL, NICKEL PLATED
FLANGE - ZINC ALLOY
4. THIS PRODUCT IS RoHS COMPLIANT.

PART NUMBER	ST2 ADAPTER SEE NOTE 3	DUST CAP COLOR	FLANGE FINISH
EHST2	SINGLE-MODE	RED	NICKEL
EHST2M	DOUBLE-MODE	BLACK	NICKEL
EHST2B	SINGLE-MODE	RED	BLACK CHROME
EHST2MB	DOUBLE MODE	BLACK	BLACK CHROME

CUSTOMER DRAWING

					UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES - TWO PLACE DECIMALS ±0.02 - THREE PLACE DECIMALS ±0.005	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.							
						SIZE	WIDTH		MULT	LBS/M	TEMPER		
						FINISH				MATERIAL			
						SPEC No.				SPEC No.			
						FIRST USED ON			SCALE		Switchcraft® SHEET 1 OF 1		
B	27621	12-4-15	TO	TJK		DATE DRAWN	BY	CHKD	APVD				
A	26306	12/1/08	RS	TJK		5/12/08	JGK	RS	TJK				
							6/2/09	7/16/09					
REV	ECO NUMBER	DATE	BY	APVD	NAME				PART No.		REV		
REVISIONS					DO NOT SCALE DRAWING		E SERIES ST2				EHST2_SERIES		B
							FIBER OPTIC ADAPTER, RoHS						

SolidWorks CAD File



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Switchcraft:

[EHST2M](#) [EHST2](#) [EHST2MB](#) [EHST2B](#)