
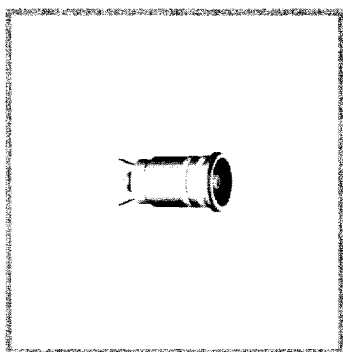



ERT Straight receptacle without thread, force or adhesive fit

	Weight (g)	Note
ERT.00.250.CTL	2.2	○



P4 Panel cut-out – see page 33



ERM Fixed receptacle, nut fixing, with microswitch

	Weight (g)	Note
ERM.00.250.CTL	3.0	○



P5 Panel cut-out – see page 33



ECP Fixed receptacle with two nuts

	Weight (g)	Note
ECP.00.250.CTL	3.3	○



P1 Panel cut-out – see page 33

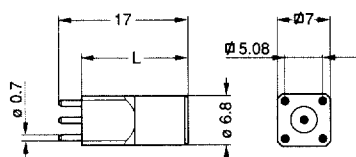

EPA-EPB Straight receptacle for printed circuit

	L (mm)	Weight (g)	Note
EPA.00.250.NTN	14	3.4	●
EPB.00.250.NTN	12	3.3	●

P10 PCB drilling pattern – see page 33



EPC Straight receptacle for printed circuit with clearance under the body

	Weight (g)	Note
EPC.00.250.NTN	3.3	○

P10 PCB drilling pattern – see page 33

● Available ○ On request