

SUMMARY

Wires

Low	0
High	0
Coax	0
Triax	1
Quad	0
Fiber	0
Fluidic	0

Series	0S
Termination type	
IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	FFW.0S.650.NTAR17



Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	EPL*: Elbow receptacle for printed circuit
Keying	
Housing Material	Brass (nickel plated) shell, collet nut, latch sleeve and mid pieces
Cable Fixing	∅ 0 - 0 mm
Variant	

Performance

Configuration	0S.650 : 1 Triax (50 Ohm)
Insulator	T: PTFE
Rated Current	6 Amps

Specifications

Test Voltage(kV rms)	1.2
Cable type:	RGT 178, RGT 174


Others

Endurance (Shell):	5000 mating cycles
Temp (min / max):	-55°C / +250°C
Humidity (max):	<=95% [at 60 deg C / 140 F]

Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Salt Spray Corrosion: >1000 hr
Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)
IP Rating: 50

DRAWINGS

Draws

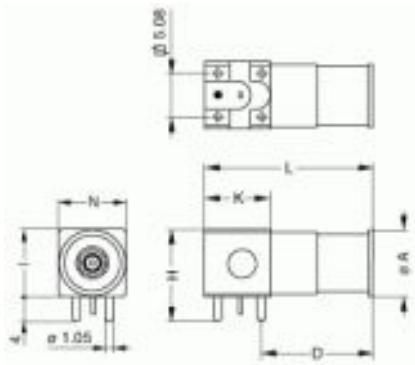

Dimensions

	A	H	I	L	N	d
mm.	8.8	13	9	23.6	9	5.08
in.	0,35	0,51	0,35	0,93	0,35	0,20

RECOMMENDED BY LEMO

Tools

None

Cables