

SMG Series

- Endurance : 2,000 hours at 85°C
- Solvent resistant type except 315 to 450V_{dc}
(see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant





◆SPECIFICATIONS

Items	Characteristics														
Category															
Temperature Range	-40 to +85℃(6.3 to 400V _{dc}) -25 to +85℃(450V _{dc})														
Rated Voltage Range	6.3 to 450V _{dc}														
Capacitance Tolerance	±20% (M) (at 20℃, 120Hz)														
Leakage Current	6.3 to 100V _{dc}						160 to 450V _{dc}								
	≤φ18 I=0.03CV or 4μA, whichever is greater. (at 20℃ after 1 minute)						CV		Time		After 1minute		After 5minute		
							CV≤1,000				I=0.1CV+40 max.		I=0.03CV+15 max.		
							CV>1,000				I=0.04CV+100 max.		I=0.02CV+25 max.		
	≥φ20 I=0.03CV (at 20℃ after 3 minutes)						(at 20℃)								
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)														
Dissipation Factor (tanδ)	Rated voltage (V _{dc})		6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	315 to 400V	450V		
	tanδ (Max.)		≤φ18	0.34	0.24	0.20	0.16	0.14	0.12	0.09	0.08	0.20	0.24	0.24	
			≥φ20	0.28	0.24	0.20	0.16	0.14	0.12	0.09	0.08	0.15	0.15	0.20	
When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20℃, 120Hz)															
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})		6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	315 to 400V	450V		
	Z(-25℃)/Z(+20℃)		≤φ18	5	4	3	2	2	2	2	2	3	6	6	
			≥φ20	5	4	3	2	2	2	2	2	4	6	6	
Endurance	Z(-40℃)/Z(+20℃)		≤φ18	12	10	8	5	4	3	3	3	4	6	—	
	(at 120Hz)														
	The following specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage is applied for 2,000 hours at 85℃.														
Shelf Life	Capacitance change		≤±20% of the initial value												
	D.F. (tanδ)		≤200% of the initial specified value												
	Leakage current		≤The initial specified value												
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 85℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.														
	Rated voltage		6.3 to 100V _{dc}						160 to 450V _{dc}						
	Capacitance change		≤±20% of the initial value						≤±20% of the initial value						
	D.F. (tanδ)		≤200% of the initial specified value						≤200% of the initial specified value						
	Leakage current		≤The initial specified value						≤500% of the initial specified value						


◆DIMENSIONS [mm]

- Terminal Code : E

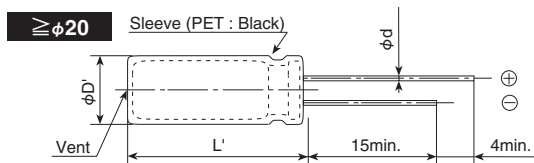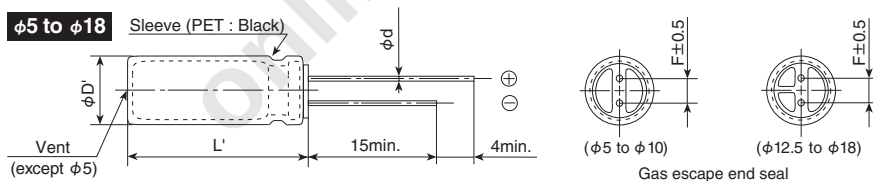

φD	5	6.3	8	10	12.5	16	18	20	22
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0	1.0
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0
φD'	φD+0.5max.							φD+0.5max.	
L'	L+1.5max.							L+2.0max.	

◆PART NUMBERING SYSTEM

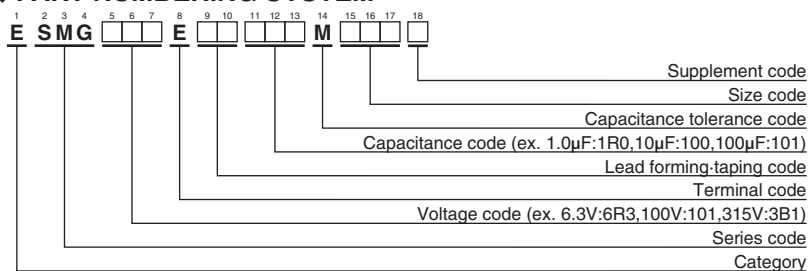

Please refer to "Product code guide
(radial lead type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mA _{rms} /85°C, 120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mA _{rms} /85°C, 120Hz)	Part No.
6.3	220	5×11	0.34	200	ESMG6R3E□□221ME11D	25	6,800	22×30	0.26	2,510	ESMG250E□□682MP30S
	330	6.3×11	0.34	270	ESMG6R3E□□331MF11D		8,200	20×40	0.30	2,810	ESMG250E□□822MN40S
	470	6.3×11	0.34	320	ESMG6R3E□□471MF11D		8,200	22×35	0.30	2,810	ESMG250E□□822MP35S
	1,000	8×11.5	0.34	540	ESMG6R3E□□102MHB5D		10,000	22×40	0.34	3,240	ESMG250E□□103MP40S
	2,200	10×20	0.36	1,000	ESMG6R3E□□222MJ20S		12,000	22×40	0.38	3,240	ESMG250E□□123MP40S
	3,300	10×20	0.38	1,185	ESMG6R3E□□332MJ20S	35	47	5×11	0.14	130	ESMG350E□□470ME11D
	4,700	12.5×20	0.40	1,545	ESMG6R3E□□472MK20S		100	6.3×11	0.14	210	ESMG350E□□101MF11D
	6,800	12.5×25	0.44	1,915	ESMG6R3E□□682MK25S		220	8×11.5	0.14	385	ESMG350E□□221MHB5D
	10,000	16×25	0.52	2,330	ESMG6R3E□□103ML25S		330	10×12.5	0.14	490	ESMG350E□□331MJC5S
	10,000	20×25	0.46	2,310	ESMG6R3E□□103MN25S		470	10×16	0.14	645	ESMG350E□□471MJ16S
	15,000	16×35.5	0.62	2,845	ESMG6R3E□□153MLP1S		1,000	12.5×20	0.14	1,145	ESMG350E□□102MK20S
	15,000	20×30	0.56	2,660	ESMG6R3E□□153MN30S		2,200	16×25	0.16	1,785	ESMG350E□□222ML25S
	18,000	20×35	0.62	2,890	ESMG6R3E□□183MN35S		2,200	20×20	0.16	1,670	ESMG350E□□222MN20S
	18,000	22×30	0.62	2,860	ESMG6R3E□□183MP30S		3,300	16×35.5	0.18	2,275	ESMG350E□□472MN35S
	22,000	18×40	0.76	3,320	ESMG6R3E□□223MM40S		3,300	20×25	0.18	2,050	ESMG350E□□332MN25S
	22,000	20×40	0.70	3,130	ESMG6R3E□□223MN40S		3,900	20×30	0.18	2,310	ESMG350E□□392MN30S
	22,000	22×35	0.70	3,130	ESMG6R3E□□223MP35S		4,700	18×35.5	0.20	2,700	ESMG350E□□472MMP1S
	27,000	22×40	0.80	3,280	ESMG6R3E□□273MP40S		4,700	20×35	0.20	2,510	ESMG350E□□472MN35S
10	220	5×11	0.24	240	ESMG100E□□221ME11D		4,700	22×30	0.20	2,380	ESMG350E□□472MP30S
	330	6.3×11	0.24	290	ESMG100E□□331MF11D	50	5,600	20×40	0.22	2,690	ESMG350E□□562MN40S
	470	6.3×11	0.24	350	ESMG100E□□471MF11D		5,600	22×35	0.22	2,690	ESMG350E□□562MP35S
	1,000	10×12.5	0.24	650	ESMG100E□□102MJC5S		6,800	22×40	0.24	3,090	ESMG350E□□682MP40S
	2,200	10×20	0.26	1,070	ESMG100E□□222MJ20S		1.0	5×11	0.12	17	ESMG500E□□1R0ME11D
	3,300	12.5×20	0.28	1,420	ESMG100E□□332MK20S		2.2	5×11	0.12	28	ESMG500E□□2R2ME11D
	4,700	12.5×25	0.30	1,780	ESMG100E□□472MK25S		3.3	5×11	0.12	35	ESMG500E□□3R3ME11D
	6,800	16×25	0.34	2,220	ESMG100E□□682ML25S		4.7	5×11	0.12	41	ESMG500E□□471MF11D
	6,800	20×20	0.34	2,080	ESMG100E□□682MN20S		10	5×11	0.12	60	ESMG500E□□100ME11D
	10,000	16×35.5	0.42	2,670	ESMG100E□□103MLP1S		22	5×11	0.12	95	ESMG500E□□220ME11D
	10,000	20×25	0.42	2,410	ESMG100E□□103MN25S		33	5×11	0.12	125	ESMG500E□□330ME11D
	12,000	20×30	0.46	2,620	ESMG100E□□123MN30S		47	6.3×11	0.12	155	ESMG500E□□470MF11D
	15,000	18×35.5	0.52	3,080	ESMG100E□□153MMP1S		100	8×11.5	0.12	260	ESMG500E□□101MHB5D
	15,000	20×35	0.52	2,870	ESMG100E□□153MN35S		220	10×12.5	0.12	430	ESMG500E□□221MJC5S
	15,000	22×30	0.52	2,660	ESMG100E□□153MP30S		330	10×16	0.12	585	ESMG500E□□331MJ16S
	18,000	22×35	0.58	3,050	ESMG100E□□183MP35S		470	10×20	0.12	755	ESMG500E□□471MJ20S
16	22,000	22×40	0.66	3,480	ESMG100E□□223MP40S		1,000	12.5×25	0.12	1,340	ESMG500E□□102MK25S
	100	5×11	0.20	160	ESMG160E□□101ME11D	63	1,500	20×20	0.12	1,570	ESMG500E□□152MN20S
	220	6.3×11	0.20	260	ESMG160E□□221MF11D		2,200	16×35.5	0.14	2,075	ESMG500E□□222MLP1S
	330	8×11.5	0.20	370	ESMG160E□□331MHB5D		2,200	20×25	0.14	1,880	ESMG500E□□222MN25S
	470	8×11.5	0.20	440	ESMG160E□□471MHB5D		2,700	20×30	0.14	2,150	ESMG500E□□272MN30S
	1,000	10×16	0.20	785	ESMG160E□□102MJ16S		3,300	18×35.5	0.16	2,500	ESMG500E□□332MMP1S
	2,200	12.5×20	0.22	1,295	ESMG160E□□222MK20S		3,300	20×35	0.16	2,420	ESMG500E□□332MN35S
	3,300	12.5×25	0.24	1,655	ESMG160E□□332MK25S		3,300	22×30	0.16	2,420	ESMG500E□□332MP30S
	4,700	16×25	0.26	2,090	ESMG160E□□472ML25S		3,900	20×40	0.16	2,590	ESMG500E□□392MN40S
	4,700	20×20	0.26	1,960	ESMG160E□□472MN20S		3,900	22×35	0.16	2,590	ESMG500E□□392MP35S
	6,800	16×31.5	0.30	2,520	ESMG160E□□682MLN3S		4,700	22×40	0.18	2,960	ESMG500E□□472MP40S
	6,800	20×25	0.30	2,330	ESMG160E□□682MN25S	100	10	5×11	0.09	65	ESMG630E□□100ME11D
	8,200	20×30	0.34	2,500	ESMG160E□□822MN30S		22	5×11	0.09	100	ESMG630E□□220ME11D
	10,000	18×35.5	0.38	2,920	ESMG160E□□103MMP1S		33	6.3×11	0.09	140	ESMG630E□□330MF11D
	10,000	20×35	0.38	2,720	ESMG160E□□103MN35S		47	6.3×11	0.09	170	ESMG630E□□470MF11D
	10,000	22×30	0.38	2,660	ESMG160E□□103MP30S		100	10×12.5	0.09	300	ESMG630E□□101MJC5S
	12,000	20×40	0.42	2,900	ESMG160E□□123MN40S		220	10×16	0.09	490	ESMG630E□□221MJ16S
	12,000	22×35	0.42	2,900	ESMG160E□□123MP35S		330	10×20	0.09	710	ESMG630E□□331MJ20S
	15,000	22×40	0.48	3,380	ESMG160E□□153MP40S		470	12.5×20	0.09	900	ESMG630E□□471MK20S
25	47	5×11	0.16	115	ESMG250E□□470ME11D		820	20×20	0.09	1,370	ESMG630E□□821MN20S
	100	6.3×11	0.16	190	ESMG250E□□101MF11D		1,000	16×25	0.09	1,300	ESMG630E□□102ML25S
	220	8×11.5	0.16	330	ESMG250E□□221MHB5D		1,000	20×25	0.09	1,600	ESMG630E□□102MN25S
	330	8×11.5	0.16	440	ESMG250E□□331MHB5D		1,500	20×30	0.09	1,850	ESMG630E□□152MN30S
	470	10×12.5	0.16	545	ESMG250E□□471MJC5S		2,200	20×35	0.11	2,330	ESMG630E□□222MN35S
	1,000	10×20	0.16	955	ESMG250E□□102MJ20S		2,200	22×30	0.11	2,190	ESMG630E□□222MP30S
	2,200	12.5×25	0.18	1,540	ESMG250E□□222MK25S		2,700	20×40	0.11	2,640	ESMG630E□□272MN40S
	3,300	16×25	0.20	1,975	ESMG250E□□332ML25S		3,300	22×40	0.13	2,810	ESMG630E□□332MP40S
	3,300	20×20	0.20	1,850	ESMG250E□□332MN20S	100	1.0	5×11	0.08	21	ESMG101E□□1R0ME11D
	4,700	16×31.5	0.22	2,420	ESMG250E□□472MLN3S		2.2	5×11	0.08	30	ESMG101E□□2R2ME11D
	4,700	20×25	0.22	2,420	ESMG250E□□472MN25S		3.3	5×11	0.08	40	ESMG101E□□3R3ME11D
	5,600	20×30	0.24	2,430	ESMG250E□□562MN30S		4.7	5×11	0.08	45	ESMG101E□□4R7ME11D
	6,800	18×35.5	0.26	2,880	ESMG250E□□682MMP1S		10	6.3×11	0.08	75	ESMG101E□□100MF11D
	6,800	20×35	0.26	2,680	ESMG250E□□682MN35S		22	8×11.5	0.08	130	ESMG101E□□220MHB5D

□□ : Enter the appropriate lead forming or taping code.

◆STANDARD RATINGS

is not solvent resistant.

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mAmps/ 85°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mAmps/ 85°C,120Hz)	Part No.	
100	33	8×11.5	0.08	180	ESMG101E□□330MHB5D	315	47	20×20	0.15	310	ESMG3B1E□□470MN20S	
	47	10×12.5	0.08	230	ESMG101E□□470MJC5S		68	20×25	0.15	400	ESMG3B1E□□680MN25S	
	100	10×20	0.08	370	ESMG101E□□101MJ20S		82	20×25	0.15	440	ESMG3B1E□□820MN25S	
	220	12.5×25	0.08	620	ESMG101E□□221MK25S		100	20×30	0.15	500	ESMG3B1E□□101MN30S	
	330	12.5×25	0.08	760	ESMG101E□□331MK25S		120	20×30	0.15	550	ESMG3B1E□□121MN30S	
	330	20×20	0.08	870	ESMG101E□□331MN20S		180	20×40	0.15	720	ESMG3B1E□□181MN40S	
	470	16×25	0.08	1,000	ESMG101E□□471ML25S		180	22×35	0.15	720	ESMG3B1E□□181MP35S	
	680	20×30	0.08	1,360	ESMG101E□□681MN30S		220	22×40	0.15	810	ESMG3B1E□□221MP40S	
	820	22×30	0.08	1,540	ESMG101E□□821MP30S		1.0	6.3×11	0.24	22	ESMG351E□□1R0MF11D	
	1,000	18×40	0.08	1,380	ESMG101E□□102MM40S	2.2	8×11.5	0.24	38	ESMG351E□□2R2MHB5D		
	1,000	20×35	0.08	1,720	ESMG101E□□102MN35S	3.3	8×11.5	0.24	46	ESMG351E□□3R3MHB5D		
1,200	22×40	0.08	1,980	ESMG101E□□122MP40S	4.7	10×12.5	0.24	65	ESMG351E□□4R7MJC5S			
160	3.3	6.3×11	0.20	40	ESMG161E□□3R3MF11D	350	10	10×20	0.24	115	ESMG351E□□100MJ20S	
	4.7	6.3×11	0.20	48	ESMG161E□□4R7MF11D		22	12.5×20	0.24	185	ESMG351E□□220MK20S	
	10	10×12.5	0.20	94	ESMG161E□□100MJC5S		33	16×25	0.24	275	ESMG351E□□330ML25S	
	22	10×20	0.20	170	ESMG161E□□220MJ20S		47	16×25	0.24	325	ESMG351E□□470ML25S	
	33	10×20	0.20	205	ESMG161E□□330MJ20S		47	20×20	0.15	310	ESMG351E□□470MN20S	
	47	12.5×20	0.20	270	ESMG161E□□470MK20S		68	20×25	0.15	400	ESMG351E□□680MN25S	
	100	12.5×25	0.20	430	ESMG161E□□101MK25S		100	18×31.5	0.24	530	ESMG351E□□101MMN3S	
	220	16×31.5	0.20	760	ESMG161E□□221MLN3S		100	20×30	0.15	500	ESMG351E□□101MN30S	
	220	20×25	0.15	730	ESMG161E□□221MN25S		120	20×35	0.15	560	ESMG351E□□121MN35S	
	330	18×35.5	0.20	995	ESMG161E□□331MMP1S		1.0	6.3×11	0.24	22	ESMG401E□□1R0MF11D	
	330	20×30	0.15	920	ESMG161E□□331MN30S		2.2	8×11.5	0.24	38	ESMG401E□□2R2MHB5D	
390	20×35	0.15	1,160	ESMG161E□□391MN35S	3.3	10×12.5	0.24	54	ESMG401E□□3R3MJC5S			
390	22×30	0.15	1,160	ESMG161E□□391MP30S	4.7	10×16	0.24	71	ESMG401E□□4R7MJ16S			
470	20×40	0.15	1,340	ESMG161E□□471MN40S	10	10×20	0.24	115	ESMG401E□□100MJ20S			
470	22×35	0.15	1,340	ESMG161E□□471MP35S	22	12.5×25	0.24	205	ESMG401E□□220MK25S			
560	22×40	0.15	1,470	ESMG161E□□561MP40S	33	16×25	0.24	275	ESMG401E□□330ML25S			
200	3.3	6.3×11	0.20	40	ESMG201E□□3R3MF11D	400	33	20×20	0.15	260	ESMG401E□□330MN20S	
	4.7	8×11.5	0.20	55	ESMG201E□□4R7MHB5D		47	16×31.5	0.24	350	ESMG401E□□470MLN3S	
	10	10×12.5	0.20	94	ESMG201E□□100MJC5S		56	20×25	0.15	350	ESMG401E□□560MN25S	
	22	10×20	0.20	170	ESMG201E□□220MJ20S		68	20×30	0.15	420	ESMG401E□□680MN30S	
	33	10×20	0.20	205	ESMG201E□□330MJ20S		100	20×35	0.15	520	ESMG401E□□101MN35S	
	47	12.5×20	0.20	270	ESMG201E□□470MK20S		100	22×30	0.15	520	ESMG401E□□101MP30S	
	100	16×25	0.20	475	ESMG201E□□101ML25S		120	20×40	0.15	580	ESMG401E□□121MN40S	
	100	20×20	0.15	460	ESMG201E□□101MN20S		120	22×35	0.15	580	ESMG401E□□121MP35S	
	180	20×25	0.15	660	ESMG201E□□181MN25S		2.2	10×12.5	0.24	32	ESMG451E□□2R2MJC5S	
	220	18×35.5	0.20	810	ESMG201E□□221MMP1S		3.3	10×16	0.24	44	ESMG451E□□3R3MJ16S	
	220	20×30	0.15	750	ESMG201E□□221MN30S		4.7	10×20	0.24	56	ESMG451E□□4R7MJ20S	
270	20×30	0.15	830	ESMG201E□□271MN30S	10	12.5×20	0.24	91	ESMG451E□□100MK20S			
330	20×35	0.15	1,070	ESMG201E□□331MN35S	22	16×25	0.24	165	ESMG451E□□220ML25S			
330	22×30	0.15	1,070	ESMG201E□□331MP30S	22	20×20	0.20	180	ESMG451E□□220MN20S			
390	20×40	0.15	1,190	ESMG201E□□391MN40S	33	16×31.5	0.24	215	ESMG451E□□330MLN3S			
390	22×30	0.15	1,160	ESMG201E□□391MP30S	33	20×25	0.20	240	ESMG451E□□330MN25S			
470	22×40	0.15	1,350	ESMG201E□□471MP40S	47	16×35.5	0.24	265	ESMG451E□□470MLP1S			
560	22×40	0.15	1,430	ESMG201E□□561MP40S	47	20×25	0.20	290	ESMG451E□□470MN25S			
250	2.2	6.3×11	0.20	32	ESMG251E□□2R2MF11D	450	56	20×30	0.20	320	ESMG451E□□560MN30S	
	3.3	8×11.5	0.20	46	ESMG251E□□3R3MHB5D		68	20×35	0.20	370	ESMG451E□□680MN35S	
	4.7	8×11.5	0.20	55	ESMG251E□□4R7MHB5D		68	22×30	0.20	370	ESMG451E□□680MP30S	
	10	10×16	0.20	105	ESMG251E□□100MJ16S		82	20×40	0.20	420	ESMG451E□□820MN40S	
	22	10×20	0.20	170	ESMG251E□□220MJ20S		82	22×35	0.20	420	ESMG451E□□820MP35S	
	33	12.5×20	0.20	230	ESMG251E□□330MK20S		100	22×40	0.20	470	ESMG451E□□101MP40S	
	47	12.5×25	0.20	295	ESMG251E□□470MK25S							
	82	20×20	0.15	420	ESMG251E□□820MN20S							
	100	16×31.5	0.20	515	ESMG251E□□101MLN3S							
	100	20×25	0.15	490	ESMG251E□□101MN25S							
	120	20×25	0.15	530	ESMG251E□□121MN25S							
	180	20×30	0.15	680	ESMG251E□□181MN30S							
	220	18×40	0.20	825	ESMG251E□□221MM40S							
	220	20×35	0.15	780	ESMG251E□□221MN35S							
	220	22×30	0.15	820	ESMG251E□□221MP30S							
	270	20×40	0.15	880	ESMG251E□□271MN40S							
	270	22×35	0.15	880	ESMG251E□□271MP35S							
	330	22×40	0.15	1,060	ESMG251E□□331MP40S							

□□ : Enter the appropriate lead forming or taping code.

◆ RATED RIPPLE CURRENT MULTIPLIERS

● Frequency Multipliers

($\phi 5$ to $\phi 18$)

Capacitance (μF) \ Frequency (Hz)	50	120	300	1k	10k	100k
1.0 to 4.7	0.65	1.00	1.35	1.75	2.30	2.50
10 to 47	0.75	1.00	1.25	1.50	1.75	1.80
100 to 1,000	0.80	1.00	1.15	1.30	1.40	1.50
2,200 to	0.85	1.00	1.03	1.05	1.08	1.08

($\phi 20$, $\phi 22$)

Rated Voltage (V _o) \ Frequency (Hz)	50	120	300	1k	10k	100k
6.3 to 50	0.95	1.00	1.03	1.05	1.08	1.08
63 to 100	0.92	1.00	1.07	1.13	1.19	1.20
160 to 250	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.