


COIL: @ 25°C  
 RESISTANCE 320 OHMS  $\pm 10\%$   
 NOMINAL VOLTAGE 28 VDC  
 MUST OPERATE 13.5 VDC MAX.  
 TRANSIENT SUPPRESSION - 42 VDC MAX.  
 MUST RELEASE 5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:  
 VIBRATION 10 Hz TO 3000 Hz @ 30 g's  
 SHOCK 200 g's 6 MS. DURATION  
 TEMPERATURE -70 °C TO +125 °C  
 NOTES: OPERATE, RELEASE 10 MS MAX.  
 CONTACT STABILIZATION 2.5 MS MAX.  
 CONTACT BOUNCE 1 MS MAX.  
 CONTACT BREAK BOUNCE 0.1 MS MAX.

## CUSTOMER DATA SHEET

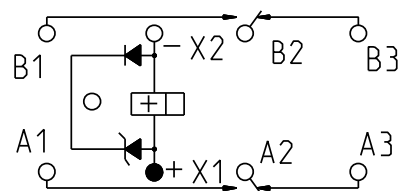

TERMINAL VIEW

CONTACT RATING: LOW LEVEL  
 TO 10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE,  
 100,000 OPERATIONS

DR. B.D. 06MAR2008 CK. 3/7/08 J.M.B.

**Tyco Electronics** ©COPYRIGHT 2005  
 TYCO ELECTRONICS CORPORATION  
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. NO. M83536/10-022L REV. ---

TE NUMBER  
 1-1617749-7

CII PART NUMBER  
 FCA-210-1022L

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FCA-210-1022L](#)