


# GT17 Series

— Automotive Shielded Connector —  
(2mm Pitch)

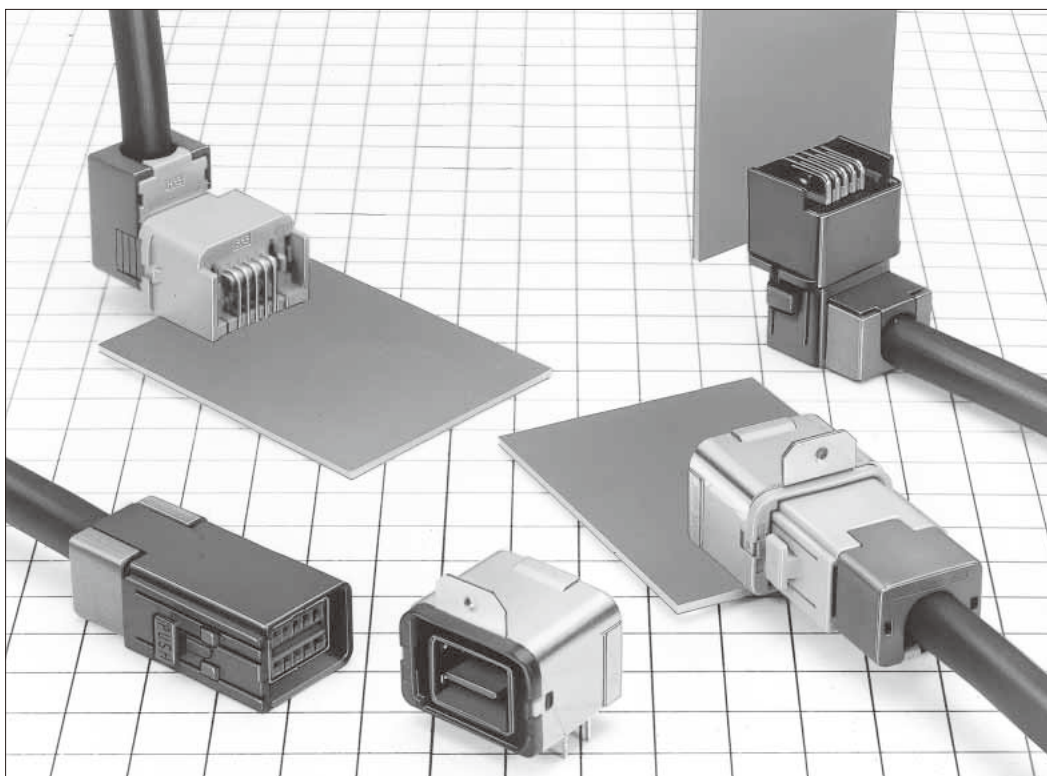

## Features


- All surface shielded construction.
- Ideal for use as automotive USB connectors.

## Applications

In-car data communications, etc.  
(For USB2.0, LVDS)

## F Connectors



### ● Center Terminals (Used with 6, 8, and 10 pos. cable)

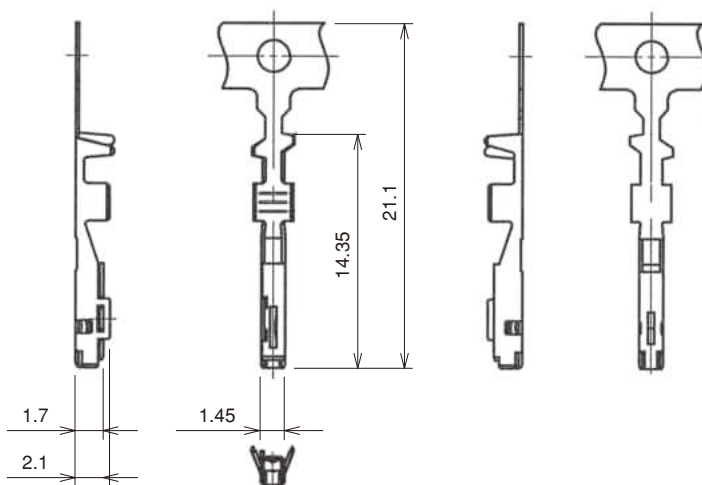

| Part No.      | HRS No.    | Material     | Plating     | Conductor Size (AWG) | Outer Diameter | Packaging       | RoHS |
|---------------|------------|--------------|-------------|----------------------|----------------|-----------------|------|
| GT17-2022SCF  | 767-0009-0 | Copper alloy | Tin plating | 20 to 22 AWG         | φ 1.1 to 1.3   | 10,000 pcs/reel | YES  |
| GT17-2428SCF  | 767-0010-0 |              |             | 24 to 28 AWG         | φ 0.7 to 1.0   |                 |      |
| GT17-30SCF    | 767-0064-9 |              |             | 30 AWG               | φ 1.1 to 1.3   |                 |      |
| GT17B-2428SCF | 767-0122-3 |              |             | 24 to 28 AWG         | φ 0.5 to 0.7   |                 |      |

## M Connectors

### ● Center Terminals (Used with 6, and 10 pos. cable)

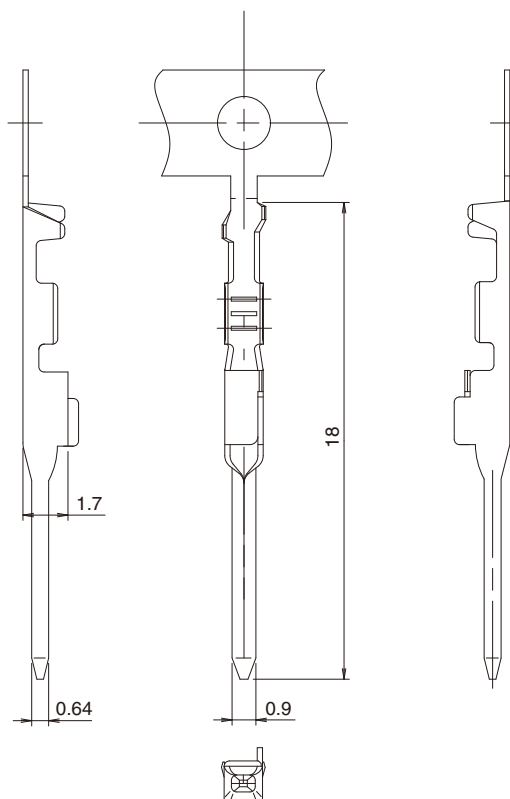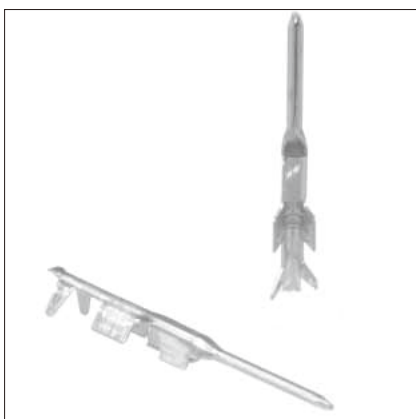

| Part No.      | HRS No.    | Material | Plating     | Conductor Size (AWG) | Outer Diameter | Packaging       | RoHS |
|---------------|------------|----------|-------------|----------------------|----------------|-----------------|------|
| GT17-2022PCF  | 767-0082-0 | Brass    | Tin plating | 20 to 22 AWG         | φ 1.1 to 1.3   | 10,000 pcs/reel | YES  |
| GT17-2428PCF  | 767-0076-8 |          |             | 24 to 28 AWG         | φ 0.7 to 1.0   |                 |      |
| GT17A-2428PCF | 767-0121-0 |          |             | 24 to 28 AWG         | φ 1.1 to 1.3   |                 |      |

GT5

GT13

GT16

PO5G

GT19

GT21

GT26

GT36

GT11

GT17

GT32

GT3

GT7

GT10

GT18W

GT25


GT8E

GT9

GT15

## 6 Pos. Straight Connectors

◆By using two key codings for different purposes, incorrect insertion can be prevented.

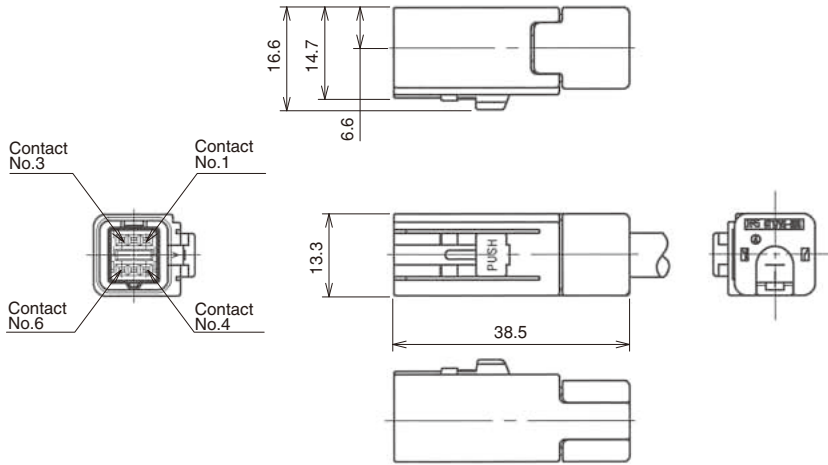

◆The product comprises 6 parts.

(Housing, insulator, outer terminal, shield plate, retainer, and center terminal)

### ● Housing

| Part No.       | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|----------------|------------|-----------------------------|-----------|------|
| GT17VS-6DS-HU  | 767-0051-7 | PBT/Light Gray              | 1         | YES  |
| GT17VSA-6DS-HU | 767-0052-0 | PBT/Black                   |           |      |

### ● Insulator

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17V-6DS-2C | 767-0026-0 | PBT/Dark Gray               | 1         | YES  |

### ● Outer terminal

| Part No.       | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|----------------|------------|-----------------------------|----------------|-----------|------|
| GT17VS-6DS-5CF | 767-0050-4 | Copper alloy / Tin plating  | φ 4.8 to 5.2   | 1         | YES  |

### ● Shield plate

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17VS-6DS-SC | 767-0049-5 | Copper alloy / Tin plating  | 1         | YES  |

### ● Retainer

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17VS-6DS-R | 767-0053-2 | PBT/Dark Gray               | 1         | YES  |

### ● Center terminal



Used with 6, 8, and 10 pos. cable

### ◆Mating Table

| Color | Cable side connector | Board connector    |
|-------|----------------------|--------------------|
| Gray  | GT17VS-6DS-HU        | GT17V-6DP-DS (70)  |
|       |                      | GT17VB-6DP-DS (70) |
| Black | GT17VSA-6DS-HU       | GT17VA-6DP-DS (70) |
|       |                      | GT17VC-6DP-DS (70) |

## ■ 6 Pos. Right-angle Connectors

◆By using two key codings for different purposes, incorrect insertion can be prevented.

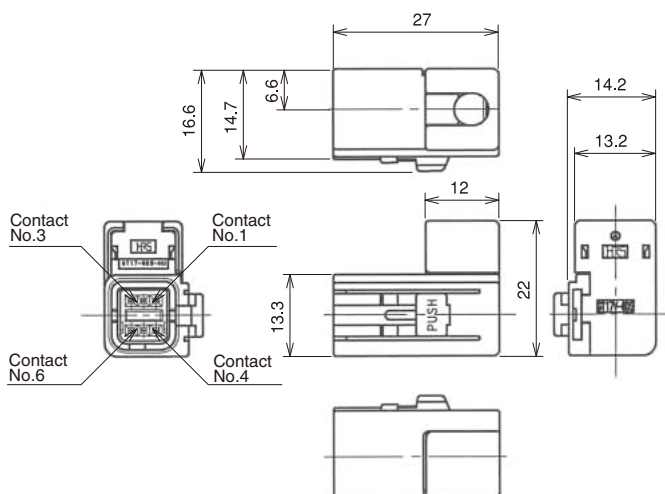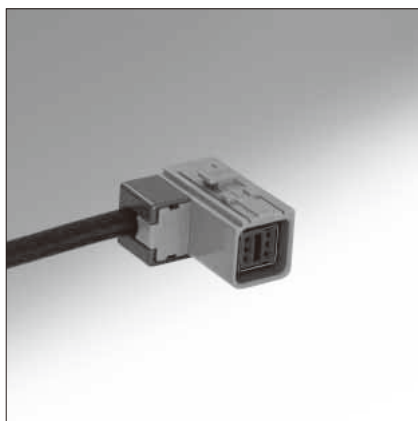

◆The product comprises 6 parts.

(Housing, insulator, outer terminal, shield plate, retainer, and center terminal)

### ● Housing

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17V-6DS-HU  | 767-0029-8 | PBT / Light Gray            | 1         | YES  |
| GT17VA-6DS-HU | 767-0030-7 | PBT / Black                 |           |      |

### ● Insulator

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17V-6DS-2C | 767-0026-0 | PBT / Dark Gray             | 1         | YES  |

### ● Outer terminal

| Part No.        | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|-----------------|------------|-----------------------------|----------------|-----------|------|
| GT17V-6DS-5CF   | 767-0027-2 | Copper alloy / Tin plating  | φ 4.8 to 5.2   | 1         | YES  |
| GT17V-6DS-3.8CF | 767-0075-5 |                             | φ 3.6 to 4.0   |           |      |

### ● Shield plate

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17V-6DS-SC | 767-0028-5 | Copper alloy / Tin plating  | 1         | YES  |

### ● Retainer

| Part No.    | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|-------------|------------|-----------------------------|-----------|------|
| GT17V-6DS-R | 767-0031-0 | PBT / Dark Gray             | 1         | YES  |

### ● Center terminal

Used with 6, 8, and 10 pos. cable

## ◆Mating Table

| Color | Cable side connector | Board connector                                                       |
|-------|----------------------|-----------------------------------------------------------------------|
| Gray  | GT17V-6DS-HU         | GT17V-6DP-DS(70)(Cable exit direction, up side from mounting side)    |
|       |                      | GT17VB-6DP-DS(70)(Cable exit direction, down side from mounting side) |
| Black | GT17VA-6DS-HU        | GT17VA-6DP-DS(70)(Cable exit direction, up side from mounting side)   |
|       |                      | GT17VC-6DP-DS(70)(Cable exit direction, down side from mounting side) |

6 Pos. Printed Circuit Board Connectors


By using two key codings for different purposes, incorrect insertion can be prevented.

● Cable extraction facing up




GT17V-6DP-DS(70)

In Combination with a Right-angle Connector (Facing Up)

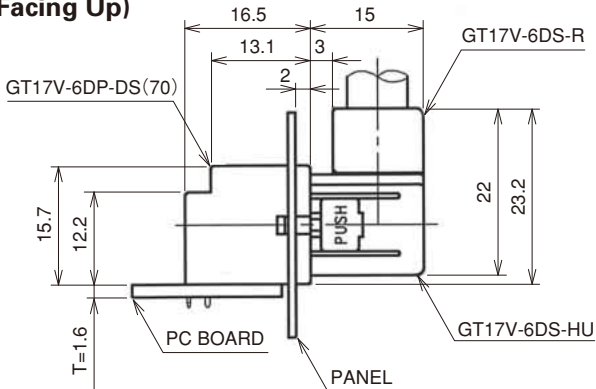


In Combination with a Straight Connector

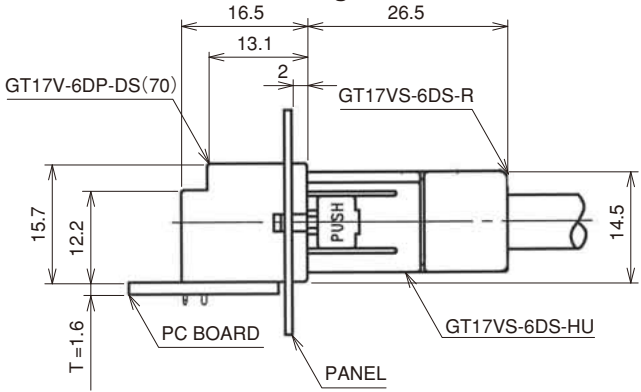


| Part No.         | HRS No.       | Material / Plating or Color                                                                                 | Packaging | RoHS |
|------------------|---------------|-------------------------------------------------------------------------------------------------------------|-----------|------|
| GT17V-6DP-DS(70) | 767-0024-4 70 | Housing: PBT/Light Gray<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating | 1         | YES  |

● Cable extraction facing down



GT17VB-6DP-DS(70)

In Combination with a Right-angle Connector (Facing Down)

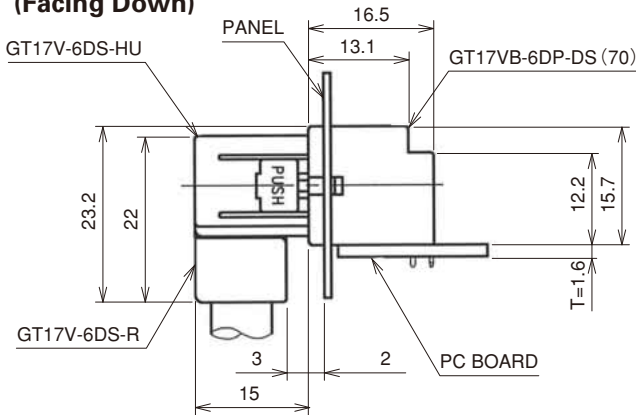

| Part No.          | HRS No.       | Material / Plating or Color                                                                                 | Packaging | RoHS |
|-------------------|---------------|-------------------------------------------------------------------------------------------------------------|-----------|------|
| GT17VB-6DP-DS(70) | 767-0032-2 70 | Housing: PBT/Light Gray<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating | 1         | YES  |

## 6 Pos. Printed Circuit Board Connectors


◆By using two key codings for different purposes, incorrect insertion can be prevented.

● Cable extraction facing up




GT17VA-6DP-DS(70)

### In Combination with a Right-angle Connector (Facing Up)

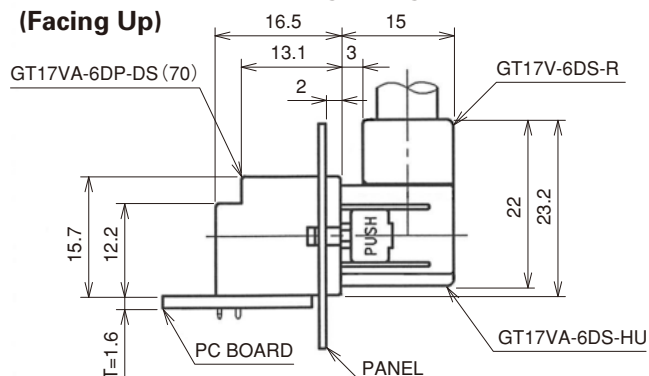

### In Combination with a Straight Connector

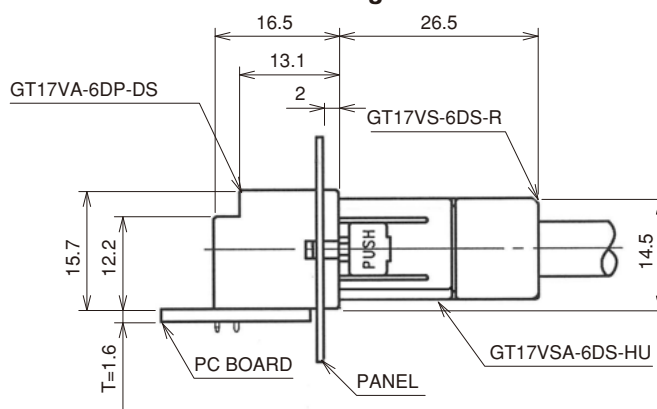


| Part No.          | HRS No.       | Material / Plating or Color                                                                            | Packaging | RoHS |
|-------------------|---------------|--------------------------------------------------------------------------------------------------------|-----------|------|
| GT17VA-6DP-DS(70) | 767-0025-7 70 | Housing: PBT/Black<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating | 1         | YES  |

● Cable extraction facing down




GT17VC-6DP-DS(70)

### In Combination with a Right-angle Connector (Facing Down)

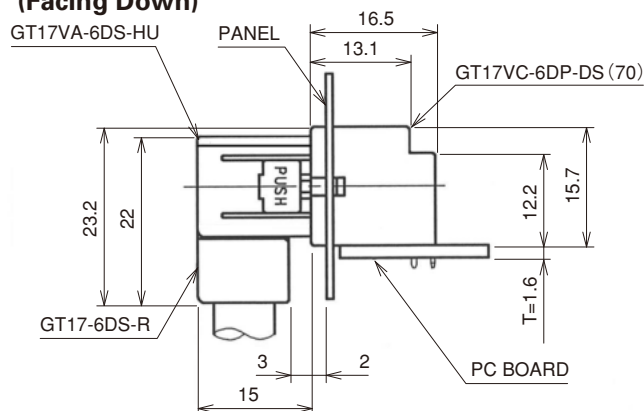

| Part No.          | HRS No.       | Material / Plating or Color                                                                            | Packaging | RoHS |
|-------------------|---------------|--------------------------------------------------------------------------------------------------------|-----------|------|
| GT17VC-6DP-DS(70) | 767-0033-5 70 | Housing: PBT/Black<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating | 1         | YES  |

## 6 Pos. In-line Connectors

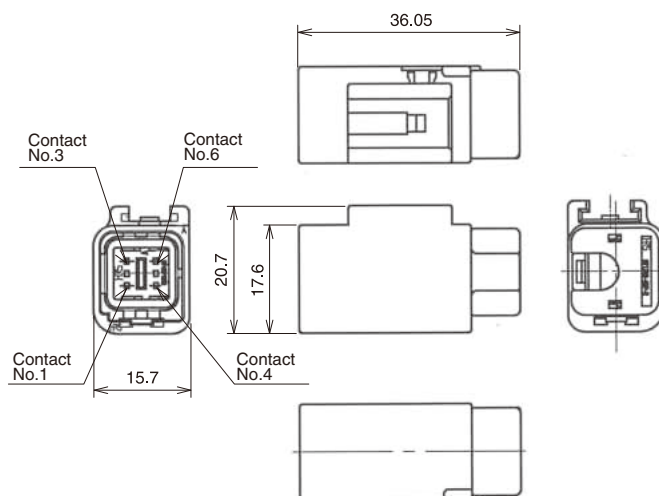

### ◆The product comprises 6 parts.

(Housing, insulator, outer terminal, shield plate, retainer, and center terminal)

#### ● Housing

| Part No.       | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|----------------|------------|-----------------------------|-----------|------|
| GT17VSN-6DP-HU | 767-0077-0 | PBT / Light Gray            | 1         | YES  |
| GT17VSV-6DP-HU | 767-0128-0 |                             |           |      |
| GT17VSN-6DP-HU | 767-0326-3 | PBT / Black                 |           |      |

#### ● Insulator

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17V-6DP-2C | 767-0078-3 | PBT / Dark Gray             | 1         | YES  |

#### ● Outer terminal

| Part No.       | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|----------------|------------|-----------------------------|----------------|-----------|------|
| GT17VS-6DP-5CF | 767-0080-5 | Copper alloy / Tin plating  | φ 4.8 to 5.0   | 1         | YES  |

#### ● Shield plate

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17VS-6DP-SC | 767-0079-6 | Copper alloy / Tin plating  | 1         | YES  |

#### ● Retainer

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17VS-6DP-R | 767-0081-8 | PBT / Dark Gray             | 1         | YES  |


#### ● Center terminal

Used with 6, and 10 Pos. cable

### ◆Mating Table



| Color | In-line Connector | Cable side Connector |
|-------|-------------------|----------------------|
| Gray  | GT17VSN-6DP-HU    | GT17V-6DS-HU         |
|       | GT17VSV-6DP-HU    | GT17VS-6DS-HU        |
| Black | GT17VSN-6DP-HU    | GT17VA-6DS-HU        |
|       |                   | GT17VSA-6DS-HU       |

### ◆Mated Condition

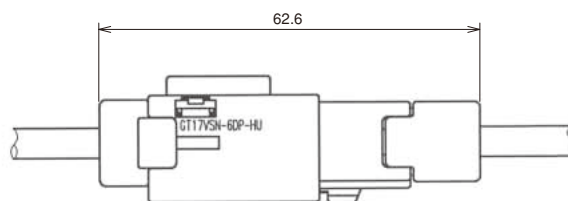

## 8 Pos. Right-angle Connectors

◆By using two key codings for different purposes, incorrect insertion can be prevented.

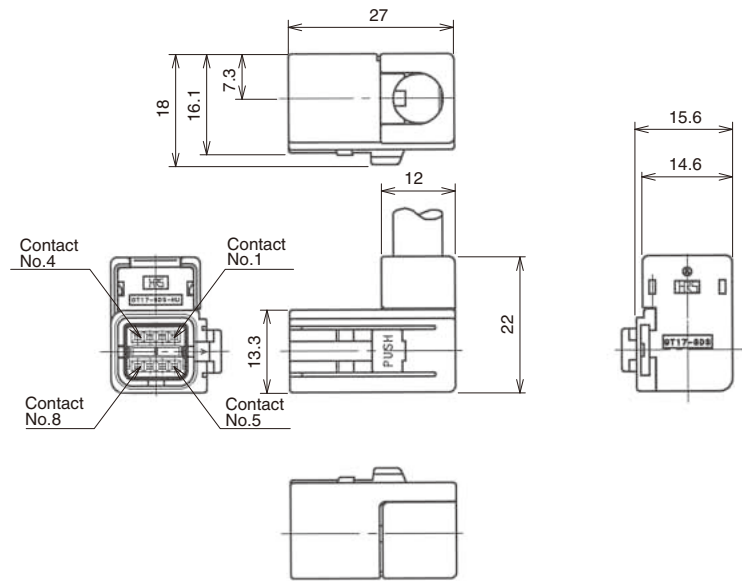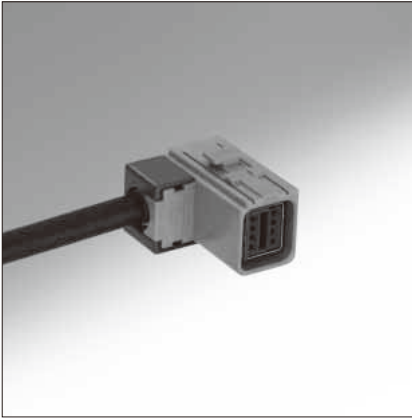

◆The product comprises 6 parts.

(Housing, insulator, outer terminal, shield plate, retainer, and center terminal)

### ● Housing

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17-8DS-HU  | 767-0003-4 | PBT / Light Gray            | 1         | YES  |
| GT17A-8DS-HU | 767-0004-7 | PBT / Black                 |           |      |

### ● Insulator

| Part No.    | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|-------------|------------|-----------------------------|-----------|------|
| GT17-8DS-2C | 767-0005-0 | PBT / Dark Gray             | 1         | YES  |

### ● Outer terminal

| Part No.         | HRS No.       | Material / Plating or Color   | Outer Diameter | Packaging | RoHS |
|------------------|---------------|-------------------------------|----------------|-----------|------|
| GT17-8DS-7CF(70) | 767-0007-5 70 | Phosphor bronze / Tin plating | φ 6.8 to 7.2   | 1         | YES  |

### ● Shield plate

| Part No.        | HRS No.       | Material / Plating or Color | Packaging | RoHS |
|-----------------|---------------|-----------------------------|-----------|------|
| GT17-8DS-SC(70) | 767-0006-2 70 | Copper alloy / Tin plating  | 1         | YES  |

### ● Retainer

| Part No.   | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|------------|------------|-----------------------------|-----------|------|
| GT17-8DS-R | 767-0008-8 | PBT / Dark Gray             | 1         | YES  |

### ● Center terminal


Used with 6, 8, and 10 pos. cable

## ◆Mating Table

| Color | Cable side connector | Board connector                                                      |
|-------|----------------------|----------------------------------------------------------------------|
| Gray  | GT17-8DS-HU          | GT17V-8DP-DS(Cable exit direction, up side from mounting side)       |
|       |                      | GT17VB-8DP-DS(Cable exit direction, down side from mounting side)    |
|       |                      | GT17VB-8DP-DS-SB(Cable exit direction, down side from mounting side) |
| Black | GT17A-8DS-HU         | GT17VA-8DP-DS(Cable exit direction, up side from mounting side)      |
|       |                      | GT17VC-8DP-DS(Cable exit direction, down side from mounting side)    |
|       |                      | GT17VC-8DP-DS-SB(Cable exit direction, down side from mounting side) |

8 Pos. Straight Connectors

By using two key codings for different purposes, incorrect insertion can be prevented.

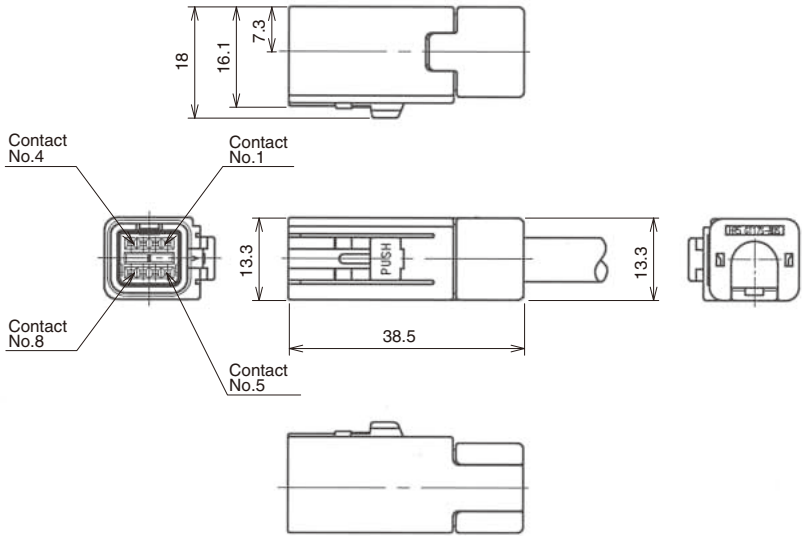

The product comprises 6 parts.  
(Housing, insulator, outer terminal, shield plate, retainer, and center terminal)

Housing

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17S-8DS-HU  | 767-0108-2 | PBT / Light Gray            | 1         | YES  |
| GT17SA-8DS-HU | 767-0109-5 | PBT / Black                 |           |      |

Insulator

| Part No.    | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|-------------|------------|-----------------------------|-----------|------|
| GT17-8DS-2C | 767-0005-0 | PBT / Dark Gray             | 1         | YES  |

Outer terminal

| Part No.      | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|---------------|------------|-----------------------------|----------------|-----------|------|
| GT17S-8DS-7CF | 767-0106-7 | Copper alloy / Tin plating  | φ 6.8 to 7.2   | 1         | YES  |

Shield plate

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17S-8DS-SC | 767-0107-0 | Copper alloy / Tin plating  | 1         | YES  |

Retainer

| Part No.    | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|-------------|------------|-----------------------------|-----------|------|
| GT17S-8DS-R | 767-0110-4 | PBT / Dark Gray             | 1         | YES  |

Center terminal

Used with 6,8, and 10 pos. cable

Mating Table



| Color | Cable side connector | Board connector  |
|-------|----------------------|------------------|
| Gray  | GT17S-8DS-HU         | GT17V-8DP-DS     |
|       |                      | GT17VB-8DP-DS    |
|       |                      | GT17VB-8DP-DS-SB |
| Black | GT17SA-8DS-HU        | GT17VA-8DP-DS    |
|       |                      | GT17VC-8DP-DS    |
|       |                      | GT17VC-8DP-DS-SB |

## ■ 8 Pos. Printed Circuit Board Connectors

### ● Cable extraction facing up




**GT17V-8DP-DS**

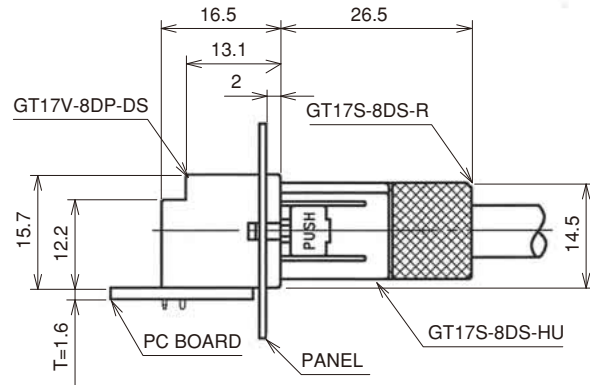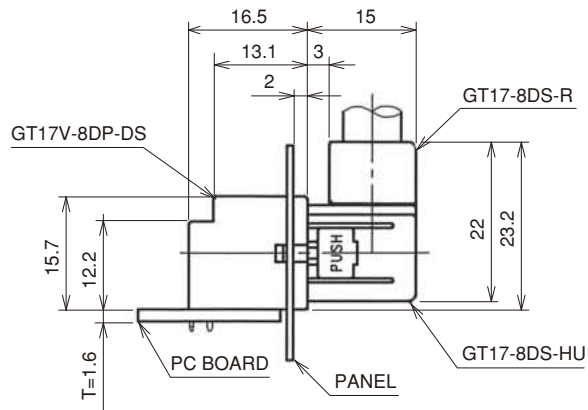

| Part No.     | HRS No.    | Material / Plating or Color                                                                                 | Packaging | RoHS |
|--------------|------------|-------------------------------------------------------------------------------------------------------------|-----------|------|
| GT17V-8DP-DS | 767-0139-6 | Housing: PBT/Light Gray<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating | 1         | YES  |


### ● Cable extraction facing down



**GT17VB-8DP-DS**



**GT17VB-8DP-DS-SB**  
(with enhanced shielding type)

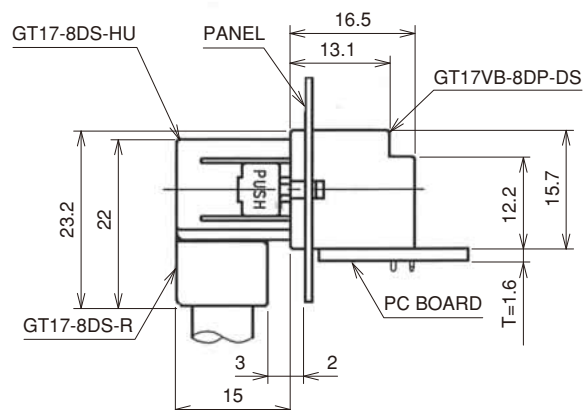



| Part No.         | HRS No.    | Material / Plating or Color                                                                                                                    | Packaging | RoHS |
|------------------|------------|------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------|
| GT17VB-8DP-DS    | 767-0185-3 | Housing: PBT/Light Gray<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating                                    | 1         | YES  |
| GT17VB-8DP-DS-SB | 767-0123-6 | Housing: PBT/Light Gray<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating<br>Shield case: Brass /Tin plating |           |      |

8 Pos. Printed Circuit Board Connectors

● Cable extraction facing up



GT17VA-8DP-DS

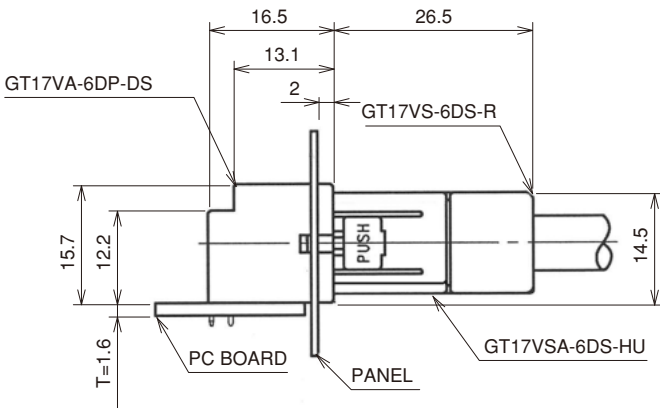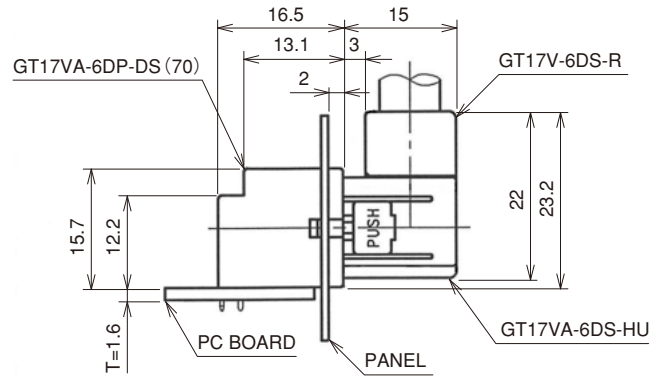

| Part No.      | HRS No.    | Material / Plating or Color                                                                            | Packaging | RoHS |
|---------------|------------|--------------------------------------------------------------------------------------------------------|-----------|------|
| GT17VA-8DP-DS | 767-0200-5 | Housing: PBT/Black<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating | 1         | YES  |

● Cable extraction facing down




GT17VC-8DP-DS



GT17VC-8DP-DS-SB



(with enhanced shielding type)

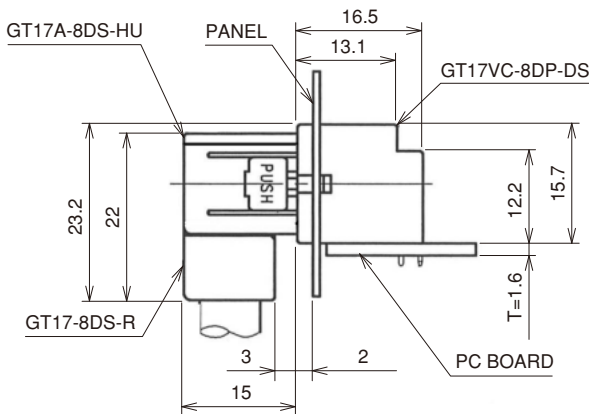

| Part No.         | HRS No.    | Material / Plating or Color                                                                                                               | Packaging | RoHS |
|------------------|------------|-------------------------------------------------------------------------------------------------------------------------------------------|-----------|------|
| GT17VC-8DP-DS    | 767-0199-8 | Housing: PBT/Black<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating                                    | 1         | YES  |
| GT17VC-8DP-DS-SB | 767-0124-9 | Housing: PBT/Black<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating<br>Shield Case: Brass /Tin plating |           |      |

## 10 Pos. Right-angle Connectors

◆By using two key codings for different purposes, incorrect insertion can be prevented.

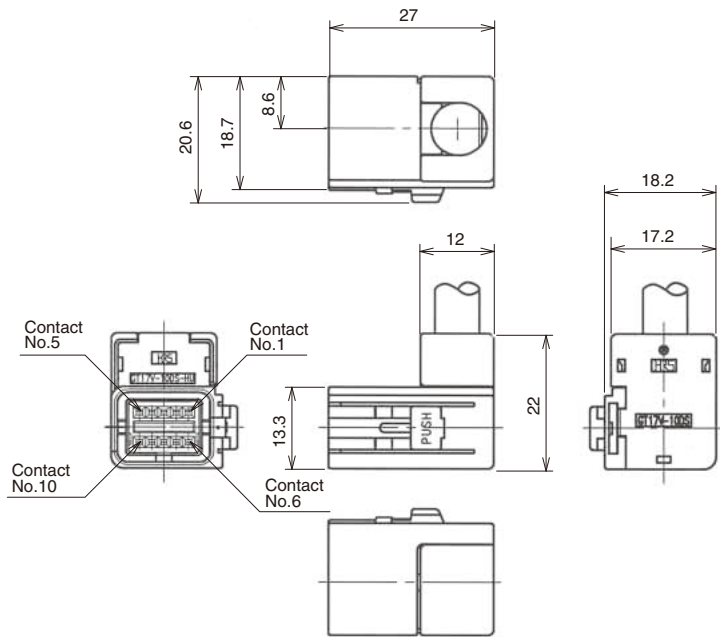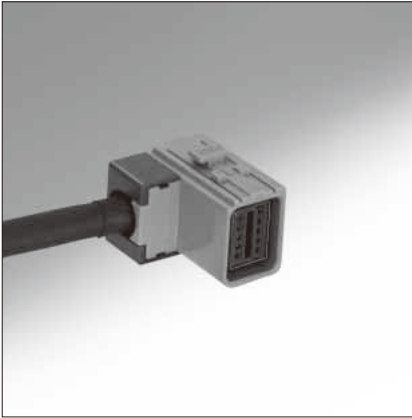

◆The product comprises 6 parts.

(Housing, insulator, outer terminal, shield plate, retainer, and center terminal)

### ● Housing

| Part No.       | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|----------------|------------|-----------------------------|-----------|------|
| GT17V-10DS-HU  | 767-0039-1 | PBT / Light Gray            | 1         | YES  |
| GT17VA-10DS-HU | 767-0040-0 | PBT / Black                 |           |      |

### ● Insulator

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17V-10DS-2C | 767-0036-3 | PBT / Dark Gray             | 1         | YES  |

### ● Outer terminal

| Part No.       | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|----------------|------------|-----------------------------|----------------|-----------|------|
| GT17V-10DS-8CF | 767-0037-6 | Copper alloy / Tin plating  | φ 7.5 to 8     | 1         | YES  |

### ● Shield plate

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17V-10DS-SC | 767-0038-9 | Copper alloy / Tin plating  | 1         | YES  |

### ● Retainer

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17V-10DS-R | 767-0041-3 | PBT / Dark Gray             | 1         | YES  |

### ● Center terminal



Used with 6, 8, and 10 pos. cable

## ◆Mating Table

| Color | Cable side connector | Board connector                                                         |
|-------|----------------------|-------------------------------------------------------------------------|
| Gray  | GT17V-10DS-HU        | GT17V-10DP-DS(70)(Cable exit direction, up side from mounting side)     |
|       |                      | GT17V-10DP-DSA(70)(Straight type)                                       |
|       |                      | GT17V-10DP-DS-SB(70)(Cable exit direction, up side from mounting side)  |
|       |                      | GT17V-10DP-DSA-SB(70)(Straight type)                                    |
| Black | GT17VA-10DS-HU       | GT17VA-10DP-DS(70)(Cable exit direction, up side from mounting side)    |
|       |                      | GT17VA-10DP-DSA(70)(Straight type)                                      |
|       |                      | GT17VA-10DP-DS-SB(70)(Cable exit direction, up side from mounting side) |
|       |                      | GT17VA-10DP-DSA-SB(70)(Straight type)                                   |

10 Pos. Straight Connectors

By using two key codings for different purposes, incorrect insertion can be prevented.

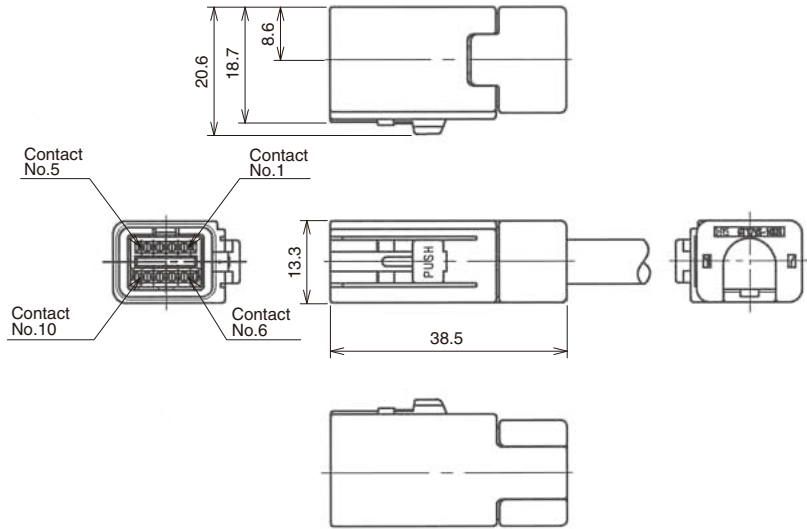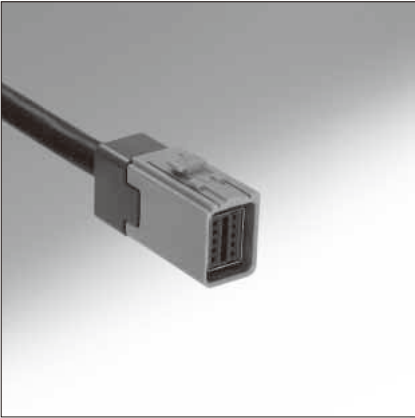

The product comprises 6 parts.  
(Housing, insulator, outer terminal, shield plate, retainer, and center terminal)

Housing

| Part No.        | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|-----------------|------------|-----------------------------|-----------|------|
| GT17VS-10DS-HU  | 767-0061-0 | PBT / Light Gray            | 1         | YES  |
| GT17VSA-10DS-HU | 767-0062-3 | PBT / Black                 |           |      |

Insulator

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17V-10DS-2C | 767-0036-3 | PBT / Dark Gray             | 1         | YES  |

Outer terminal

| Part No.        | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|-----------------|------------|-----------------------------|----------------|-----------|------|
| GT17VS-10DS-8CF | 767-0059-9 | Copper alloy / Tin plating  | φ 7.5 to 8     | 1         | YES  |

Shield plate

| Part No.       | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|----------------|------------|-----------------------------|-----------|------|
| GT17VS-10DS-SC | 767-0060-8 | Copper alloy / Tin plating  | 1         | YES  |

Retainer

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17VS-10DS-R | 767-0063-6 | PBT / Dark Gray             | 1         | YES  |

Center terminal

Used with 6,8, and 10 pos. cable

Mating Table

| Color | Cable side connector | Board connector        |
|-------|----------------------|------------------------|
| Gray  | GT17VS-10DS-HU       | GT17V-10DP-DS (70)     |
|       |                      | GT17V-10DP-DSA (70)    |
|       |                      | GT17V-10DP-DS-SB (70)  |
|       |                      | GT17V-10DP-DSA-SB      |
| Black | GT17VSA-10DS-HU      | GT17VA-10DP-DS (70)    |
|       |                      | GT17VA-10DP-DSA (70)   |
|       |                      | GT17VA-10DP-DS-SB (70) |
|       |                      | GT17VA-10DP-DSA-SB     |


## 10 Pos. Printed Circuit Board Connectors

◆By using two key codings for different purposes, incorrect insertion can be prevented.

### ● Right-angle type




GT17V-10DP-DS(70)




GT17V-10DP-DS-SB(70)  
(with enhanced shielding type)

### In Combination with a Right-angle Connector (Cable Side)

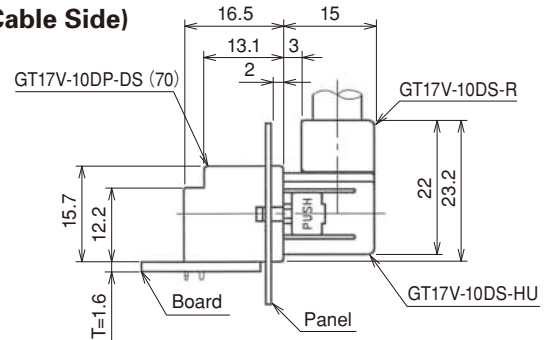


### In Combination with a Straight Connector (Cable Side)

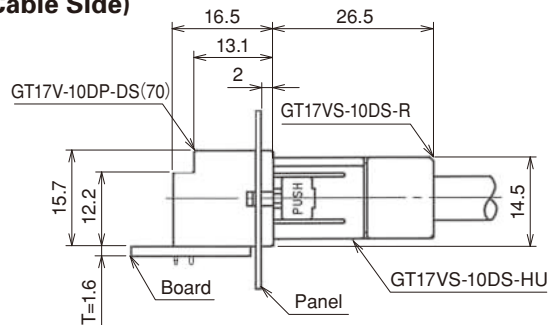

| Part No.             | HRS No.       | Material / Plating or Color                                                                                                                    | Packaging | RoHS |
|----------------------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------|
| GT17V-10DP-DS(70)    | 767-0034-8 70 | Housing: PBT/Light Gray<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating                                    | 1         | YES  |
| GT17V-10DP-DS-SB(70) | 767-0069-2 70 | Housing: PBT/Light Gray<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating<br>Shield case: Brass /Tin plating |           |      |

### ● Straight-type




GT17V-10DP-DSA(70)



GT17V-10DP-DSA-SB  
(with enhanced shielding type)

### In Combination with a Straight Connector (Cable Side)

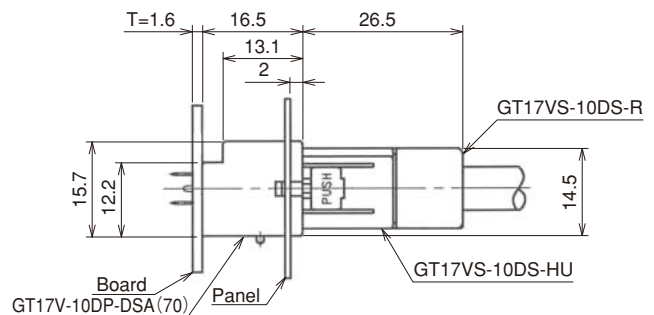

| Part No.           | HRS No.       | Material / Plating or Color                                                                                                                    | Packaging | RoHS |
|--------------------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------|
| GT17V-10DP-DSA(70) | 767-0067-7 70 | Housing: PBT/Light Gray<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating                                    | 1         | YES  |
| GT17V-10DP-DSA-SB  | 767-0154-0    | Housing: PBT/Light Gray<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating<br>Shield case: Brass /Tin plating |           |      |


10 Pos. Printed Circuit Board Connectors

By using two key codings for different purposes, incorrect insertion can be prevented.

Right-angle type




GT17VA-10DP-DS(70)




GT17VA-10DP-DS-SB(70)  
(with enhanced shielding type)

In Combination with a Right-angle Connector  
(Cable Side)

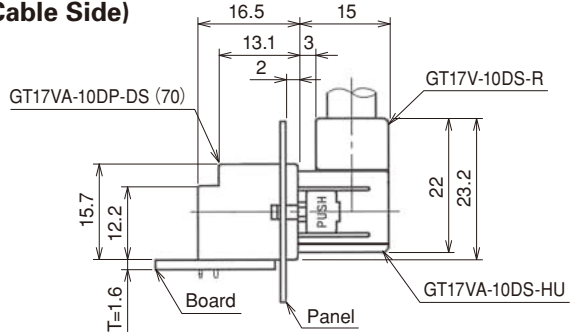


In Combination with a Straight Connector  
(Cable Side)

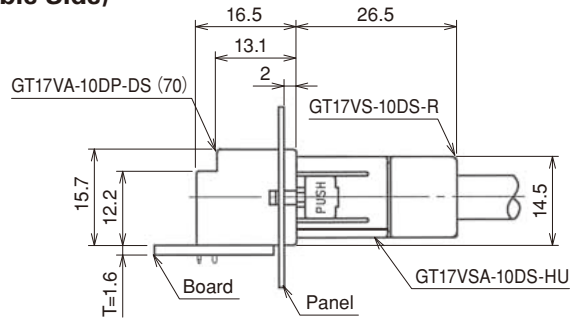

| Part No.              | HRS No.       | Material / Plating or Color                                                                                                               | Packaging | RoHS |
|-----------------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------|-----------|------|
| GT17VA-10DP-DS(70)    | 767-0035-0 70 | Housing: PBT/Black<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating                                    | 1         | YES  |
| GT17VA-10DP-DS-SB(70) | 767-0070-1 70 | Housing: PBT/Black<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating<br>Shield case: Brass /Tin plating |           |      |

Straight-type




GT17VA-10DP-DSA(70)





GT17VA-10DP-DSA-SB  
(with enhanced shielding type)

In Combination with a Straight Connector  
(Cable Side)

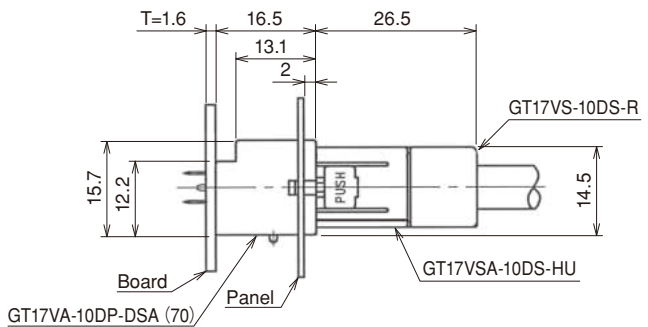

| Part No.            | HRS No.       | Material / Plating or Color                                                                                                               | Packaging | RoHS |
|---------------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------|-----------|------|
| GT17VA-10DP-DSA(70) | 767-0068-0 70 | Housing: PBT/Black<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating                                    | 1         | YES  |
| GT17VA-10DP-DSA-SB  | 767-0174-7    | Housing: PBT/Black<br>Center terminal: Brass /Tin plating<br>Outer terminal: Copper alloy /Tin plating<br>Shield case: Brass /Tin plating |           |      |

## 10 Pos. In-line Connectors

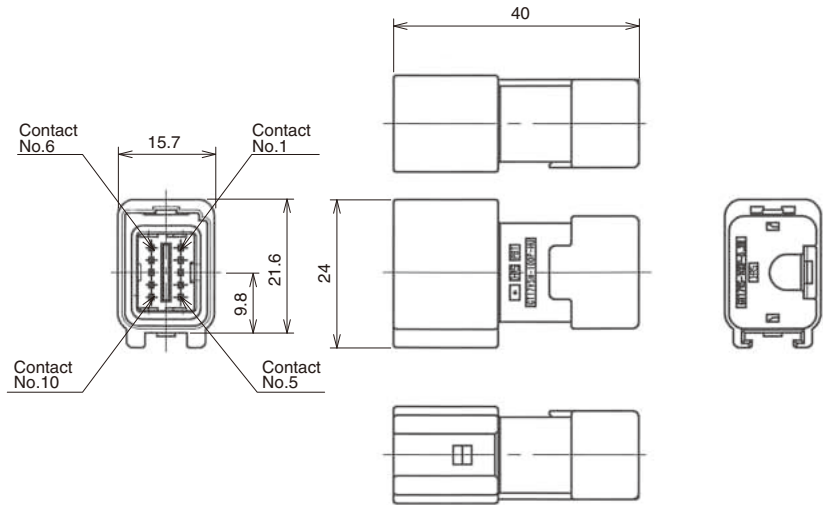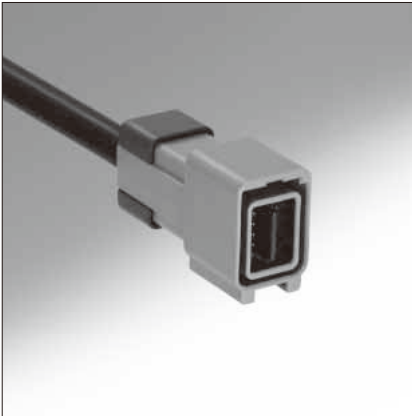

### ◆The product comprises 6 parts.

(Housing, insulator case, outer terminal, shield plate, retainer, and center terminal)

#### ● Housing

| Part No.        | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|-----------------|------------|-----------------------------|-----------|------|
| GT17VSN-10DP-HU | 767-0115-8 | PBT / Light Gray            | 1         | YES  |

#### ● Insulator

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17V-10DP-2C | 767-0112-0 | PBT / Dark Gray             | 1         | YES  |

#### ● Outer terminal

| Part No.          | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging      | RoHS |
|-------------------|------------|-----------------------------|----------------|----------------|------|
| GT17VS-10DP-5.2CF | 767-0114-5 | Copper alloy / Tin plating  | φ5.0 to 5.4    | 1,224 pcs/pack | YES  |
| GT17VS-10DP-8CF   | 767-0130-1 |                             | φ7.5 to 8.0    |                |      |

#### ● Shield plate

| Part No.       | HRS No.    | Material / Plating or Color | Packaging      | RoHS |
|----------------|------------|-----------------------------|----------------|------|
| GT17VS-10DP-SC | 767-0113-2 | Copper alloy / Tin plating  | 1,224 pcs/pack | YES  |


#### ● Retainer

| Part No.         | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|------------------|------------|-----------------------------|-----------|------|
| GT17VS-10DP-5.2R | 767-0111-7 | PBT / Dark Gray             | 1         | YES  |
| GT17VS-10DP-8R   | 767-0131-4 |                             |           |      |

#### ● Center terminal


Used with 6, and 10 pos. cable

### ◆Mated condition

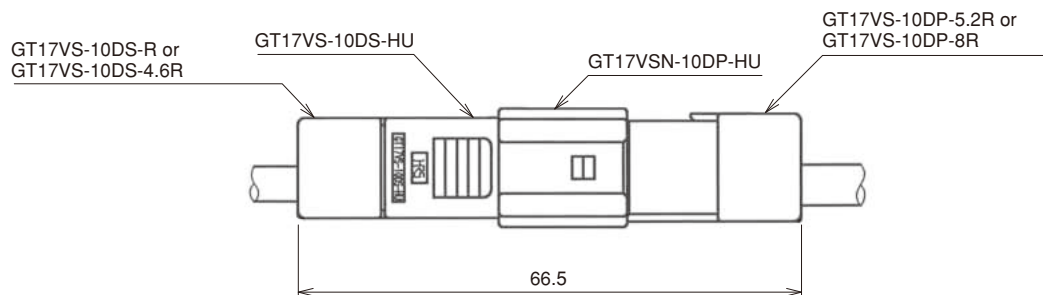


## ◆Wiring Method


### ① Strip the Jacket.




### ② Cut the shield and intermediate material to expose the wire and braid.




### ③ Bend back the drain wire over the Jacket.




### ④ Wrap with conductive tape.




### ⑤ Strip the wire leads.



### ⑥ Crimp the center terminals.

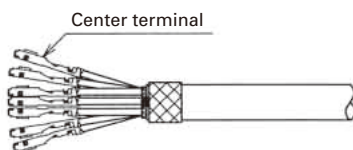


### ⑦ Insert the center terminals into the insulator.




### GT17V-10DS-HU Harness Finish


### ⑧ Insert the insulator into the Outer terminal.

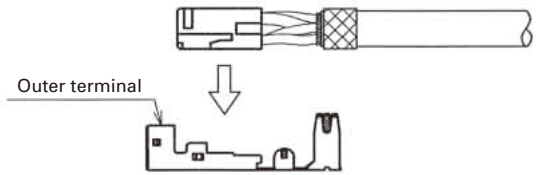


### ⑨ Insert the Shield Cover.

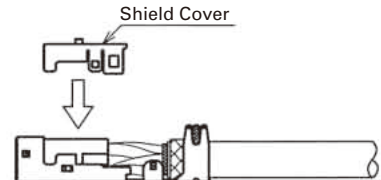

### ⑩ Fold back the Outer terminal.




### ⑪ Crimp the Outer terminal.




### ⑫ Insert the Outer terminal into the housing.



### ⑬ Insert the retainer.




### ⑭ Completion




\*Crimp height setting tables are available for each cable type. Please contact your nearest Hirose Electric account representative.  
Different cables will require different crimp height settings.

**GT17VS-10DS-HU Harness Finish**


- ⑧ Insert the insulator into the Outer terminal.

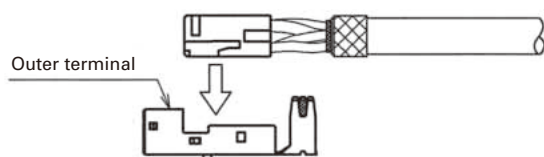


- ⑨ Crimp the Outer terminal.




- ⑩ Insert the Shield Cover.

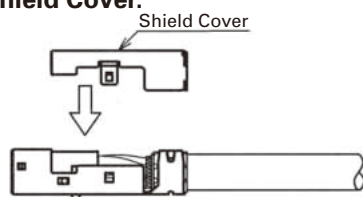

- ⑪ Insert the Outer terminal into the housing.



- ⑫ Insert the retainer.




- ⑬ Completion



## ■ 6 pos. In-line Type (Waterproof Type)

### ● F Connectors

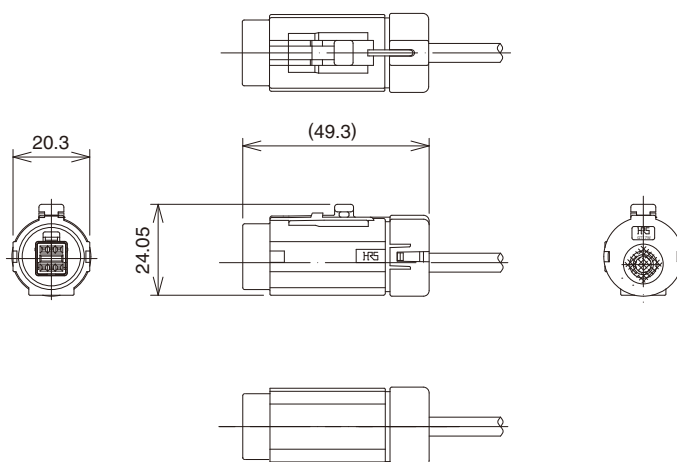

#### ◆ The product comprises 6 parts.

(Housing, insulator, outer terminal, shield plate, and center terminal)

##### ● Housing

| Part No.    | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|-------------|------------|-----------------------------|-----------|------|
| GT17W-6S-HU | 767-0214-0 | PBT / Light Gray            | 1         | YES  |

##### ● Insulator

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17V-6DS-2C | 767-0026-0 | PBT / Dark Gray             | 1         | YES  |

##### ● Outer terminal

| Part No.       | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|----------------|------------|-----------------------------|----------------|-----------|------|
| GT17VS-6DS-5CF | 767-0050-4 | Copper alloy / Tin plating  | φ4.8 to 5.2    | 1         | YES  |

##### ● Shield plate

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17VS-6DS-SC | 767-0049-5 | Copper alloy / Tin plating  | 1         | YES  |


##### ● Retainer

| Part No.     | HRS No.    | Material / Plating or Color      | Packaging | RoHS |
|--------------|------------|----------------------------------|-----------|------|
| GT17W-1P/S-R | 767-0216-5 | PBT / Dark Gray<br>Silicon/White | 1         | YES  |

##### ● Center terminal

Used with 6,8 and 10 Pos. cable

## M Connectors

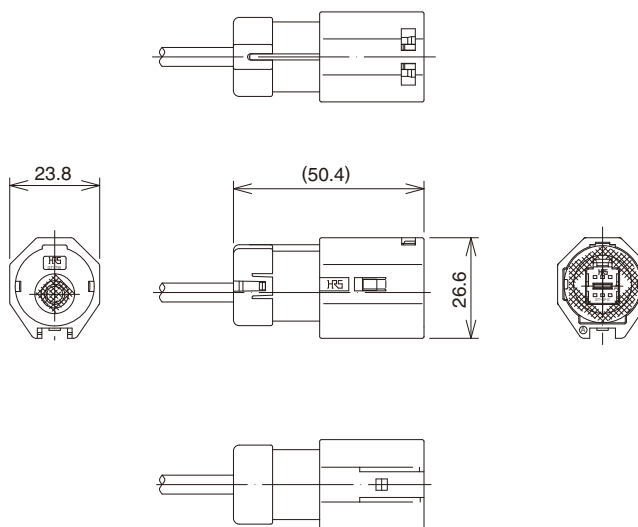

### ◆The product comprises 6 parts.

(Housing, insulator, outer terminal, shield plate, and center terminal)

#### ● Housing

| Part No.     | HRS No.    | Material / Plating or Color         | Packaging | RoHS |
|--------------|------------|-------------------------------------|-----------|------|
| GT17W-6PP-HU | 767-0215-2 | PBT / Light Gray<br>Silicon / White | 1         | YES  |

#### ● Insulator

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17V-6DP-2C | 767-0078-3 | PBT / Dark Gray             | 1         | YES  |

#### ● Outer terminal

| Part No.       | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|----------------|------------|-----------------------------|----------------|-----------|------|
| GT17VS-6DP-5CF | 767-0080-5 | Copper alloy / Tin plating  | φ4.8 to 5.2    | 1         | YES  |

#### ● Shield plate

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17VS-6DP-SC | 767-0079-6 | Copper alloy / Tin plating  | 1         | YES  |



#### ● Retainer

| Part No.     | HRS No.    | Material / Plating or Color        | Packaging | RoHS |
|--------------|------------|------------------------------------|-----------|------|
| GT17W-1P/S-R | 767-0216-5 | PBT / Dark Gray<br>Silicon / White | 1         | YES  |


#### ● Center terminal

Used with 6, and 10 Pos. cable

■ 4 pos. Right-angle Connector (1 Row type)

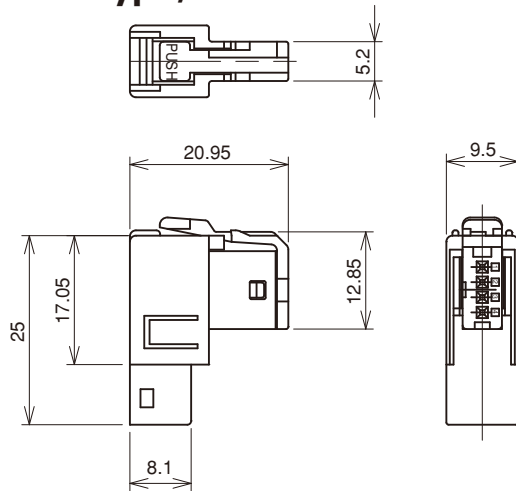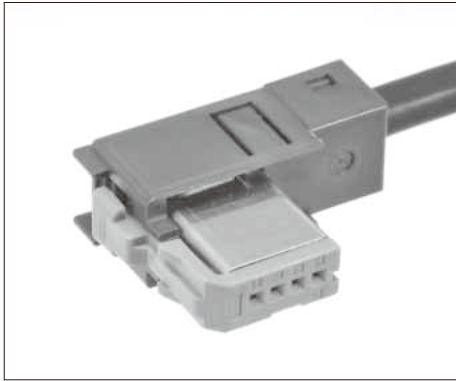

Key Variation

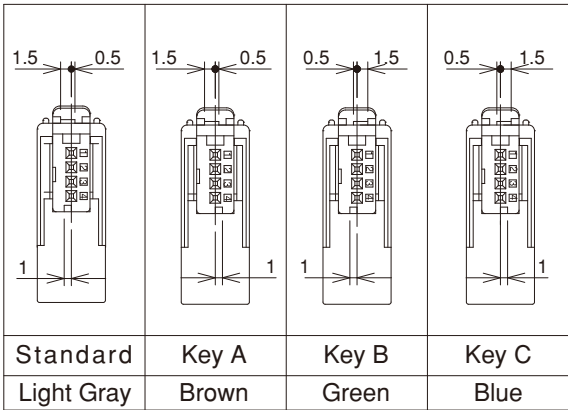

◆The product comprises 5 parts.  
(Housing, insulator, outer terminal, retainer, center terminal)

● Housing

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | Remarks         | RoHS |
|--------------|------------|-----------------------------|-----------|-----------------|------|
| GT17H-4S-HU  | 767-0085-9 | PBT / Dark Gray             | 1         | —               | YES  |
| GT17H2-4S-HU | 767-0245-3 |                             |           | With lock guard |      |

● Insulator

| Part No.       | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|----------------|------------|-----------------------------|-----------|------|
| GT17H-4S-2C    | 767-0084-6 | PBT / Light Gray            | 1         | YES  |
| GT17H-4S-2C(A) | 767-0167-1 | PBT / Brown                 |           |      |
| GT17H-4S-2C(B) | 767-0168-4 | PBT / Green                 |           |      |
| GT17H-4S-2C(C) | 767-0169-7 | PBT / Blue                  |           |      |

● Outer terminal

| Part No.     | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|--------------|------------|-----------------------------|----------------|-----------|------|
| GT17H-4S-5CF | 767-0087-4 | Copper alloy / Tin plating  | φ4.8 to 5.2    | 1         | YES  |

● Retainer

| Part No.   | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|------------|------------|-----------------------------|-----------|------|
| GT17H-4S-R | 767-0086-1 | PBT / Dark Gray             | 1         | YES  |

● Center terminal


| Part No.        | HRS No.       | Material / Plating or Color   | Conductor Size(AWG) | Outer Diameter | Packaging       | RoHS |
|-----------------|---------------|-------------------------------|---------------------|----------------|-----------------|------|
| GT8-2428SCF(70) | 758-0001-8 70 | Phosphor Bronze / Tin plating | 24 to 28 AWG        | φ0.8 to 1.5    | 10,000 pcs/reel | YES  |

◆Mating Table


| Color      | Cable side connector     | Board connector          |                 |                  |
|------------|--------------------------|--------------------------|-----------------|------------------|
|            |                          | SMT Type                 | DIP Type        |                  |
|            |                          |                          | Angle Type      | Straight Type    |
| Light Gray | GT17H-4S-ASSY            | GT17H-4P-2H/GT17HR-4P-2H | GT17H-4P-2DS    | GT17H-4P-2DSA    |
| Brown      | GT17H-4S-ASSY(Key typeA) | GT17H-4P-2H(A)           | GT17H-4P-2DS(A) | GT17H-4P-2DSA(A) |
| Green      | GT17H-4S-ASSY(Key typeB) | GT17H-4P-2H(B)           | GT17H-4P-2DS(B) | GT17H-4P-2DSA(B) |
| Blue       | GT17H-4S-ASSY(Key typeC) | GT17H-4P-2H(C)           | GT17H-4P-2DS(C) | GT17H-4P-2DSA(C) |

## ◆ Wiring Method (4 Pos. Right-angle 1 Row Type)


### ① Strip Jacket.




### ② Turn Outer shield to Backward.




### ③ Cover the cable by conductive tape.




### ④ Cut extra outer shield.




### ⑤ Strip Jacket.




### ⑥ Crimp the terminal.




### ⑦ Insert center terminal to the insulator.




### ⑧ Insert insulator to the outer terminal.




### ⑨ Bent the outer tube terminal.




### ⑩ Crimp the outer tube terminal.



### ⑪ Insert the assembled outer tube terminal to the housing.




### ⑫ Set the Retainer.



\* Concerning the crimp height of terminals, crimp height settings have been prepared for each type of cable. Please contact a Hirose Electric account representative for further information.  
Please note that new crimp height settings will be made for new cables and that this might take several days.  
terminal insertion jig(GT17-4S/PR-MD)

## ■ 4 Pos. Straight Connectors (1 Row type)

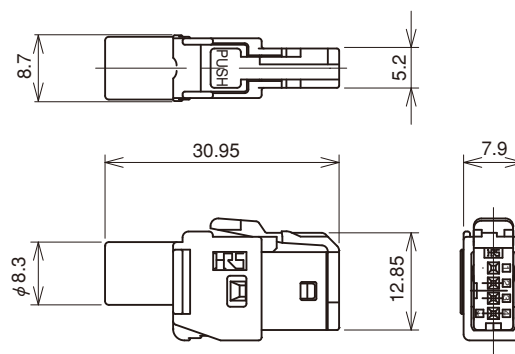

Key Variation

|            |       |       |       |
|------------|-------|-------|-------|
|            |       |       |       |
| Standard   | Key A | Key B | Key C |
| Light Gray | Brown | Green | Blue  |

◆The product comprises 4 parts.  
(Housing, insulator, outer terminal, center terminal)

### ● Housing

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | Remarks         | RoHS |
|---------------|------------|-----------------------------|-----------|-----------------|------|
| GT17HS-4S-HU  | 767-0133-0 | PBT / Dark Gray             | 1         | —               | YES  |
| GT17HSK-4S-HU | 767-0244-0 |                             |           | With lock guard |      |

### ● Insulator

| Part No.       | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|----------------|------------|-----------------------------|-----------|------|
| GT17H-4S-2C    | 767-0084-6 | PBT / Light Gray            | 1         | YES  |
| GT17H-4S-2C(A) | 767-0167-1 | PBT / Brown                 |           |      |
| GT17H-4S-2C(B) | 767-0168-4 | PBT / Green                 |           |      |
| GT17H-4S-2C(C) | 767-0169-7 | PBT / Blue                  |           |      |

### ● Outer terminal

| Part No.      | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|---------------|------------|-----------------------------|----------------|-----------|------|
| GT17HS-4S-5CF | 767-0135-5 | Copper alloy / Tin plating  | φ4.8 to 5.2    | 1         | YES  |

### ● Center terminal


| Part No.        | HRS No.       | Material / Plating or Color   | Conductor Size(AWG) | Outer Diameter | Packaging       | RoHS |
|-----------------|---------------|-------------------------------|---------------------|----------------|-----------------|------|
| GT8-2428SCF(70) | 758-0001-8 70 | Phosphor Bronze / Tin plating | 24 to 28 AWG        | φ0.8 to 1.5    | 10,000 pcs/reel | YES  |

### ◆Mating Table


| Color      | Cable side connector     | Board connector          |                 |                  |
|------------|--------------------------|--------------------------|-----------------|------------------|
|            |                          | SMT Type                 | DIP Type        |                  |
|            |                          |                          | Angle Type      | Straight Type    |
| Light Gray | GT17H-4S-ASSY            | GT17H-4P-2H/GT17HR-4P-2H | GT17H-4P-2DS    | GT17H-4P-2DSA    |
| Brown      | GT17H-4S-ASSY(Key typeA) | GT17H-4P-2H(A)           | GT17H-4P-2DS(A) | GT17H-4P-2DSA(A) |
| Green      | GT17H-4S-ASSY(Key typeB) | GT17H-4P-2H(B)           | GT17H-4P-2DS(B) | GT17H-4P-2DSA(B) |
| Blue       | GT17H-4S-ASSY(Key typeC) | GT17H-4P-2H(C)           | GT17H-4P-2DS(C) | GT17H-4P-2DSA(C) |

## ◆ Wiring Method (4 Pos. Straight 1 RowType)


- ① Insert housing to the cable.




- ② Strip Jacket.




- ③ Turn Outer shield to backward.



- ④ Cover the cable by conductive tape.



- ⑤ Cut extra outer shield.




- ⑥ Strip Jacket.






- ⑦ Crimp the terminal.




- ⑧ Insert terminal to the Insulator.




- ⑨ Set outer tube terminal to the insulator.

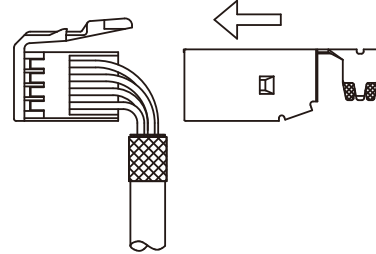

- ⑩ Crimp outer terminal.



- ⑪ Slide up housing to outer terminal.



- ⑫ Finish.




\* Concerning the crimp height of terminals, crimp height settings have been prepared for each type of cable. Please contact a Hirose Electric account representative for further information.  
Please note that new crimp height settings will be made for new cables and that this might take several days.  
terminal insertion jig(GT17-4S/PR-MD)





■ 4 Pos. Board Connectors  
(1 Row type, Right-angle SMT Type, Right side key)



GT17H-4P-2H

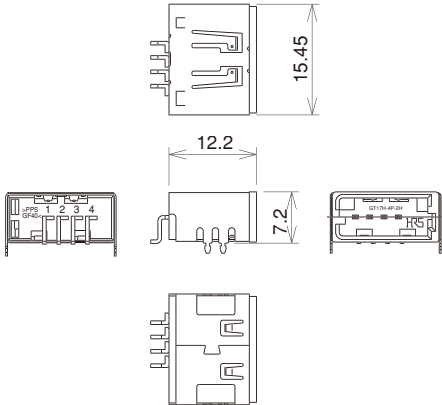

Key Variation


|                                                                                    |                                                                                     |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |
| Standard<br>Light Gray                                                             | Key B<br>Green                                                                      |
|  |  |
| Key A<br>Brown                                                                     | Key C<br>Blue                                                                       |


| Part No.       | HRS No.    | Color      | Material / Plating                                                                          | Packaging    | RoHS |
|----------------|------------|------------|---------------------------------------------------------------------------------------------|--------------|------|
| GT17H-4P-2H    | 767-0083-3 | Light Gray | Housing:PPS<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 400 pcs/reel | YES  |
| GT17H-4P-2H(A) | 767-0170-6 | Brown      |                                                                                             |              |      |
| GT17H-4P-2H(B) | 767-0171-9 | Green      |                                                                                             |              |      |
| GT17H-4P-2H(C) | 767-0172-1 | Blue       |                                                                                             |              |      |

■ 4 Pos. SMT Connector(1 Row type, Left side key)



GT17HR-4P-2H

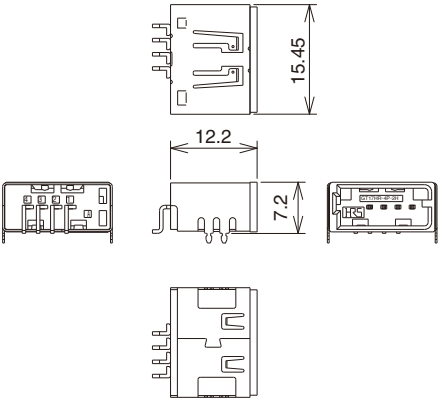


|                                                                                       |
|---------------------------------------------------------------------------------------|
|  |
| Standard<br>Light Gray                                                                |

| Part No.     | HRS No.    | Color      | Material / Plating                                                                          | Packaging    | RoHS |
|--------------|------------|------------|---------------------------------------------------------------------------------------------|--------------|------|
| GT17HR-4P-2H | 767-0146-1 | Light Gray | Housing:PPS<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 400 pcs/reel | YES  |

## ■ 4 Pos. Printed Circuit Board Connector (Right angle DIP type)



GT17H-4P-2DS

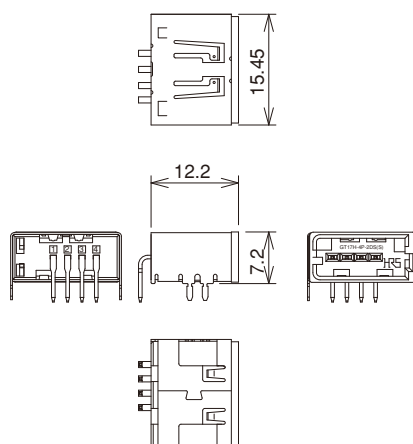


### Key Variation


|            |       |
|------------|-------|
|            |       |
| Standard   | Key B |
| Light Gray | Green |
|            |       |
| Key A      | Key C |
| Brown      | Blue  |

| Part No.        | HRS No.    | Color      | Material / Plating                                                                          | Packaging   | RoHS |
|-----------------|------------|------------|---------------------------------------------------------------------------------------------|-------------|------|
| GT17H-4P-2DS    | 767-0166-9 | Light Gray | Housing:PPS<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 300pcs/reel | YES  |
| GT17H-4P-2DS(A) | 767-0210-9 | Brown      |                                                                                             |             |      |
| GT17H-4P-2DS(B) | 767-0211-1 | Green      |                                                                                             |             |      |
| GT17H-4P-2DS(C) | 767-0212-4 | Blue       |                                                                                             |             |      |

## ■ 4 Pos. Printed Circuit Board Connector (Straight DIP type)

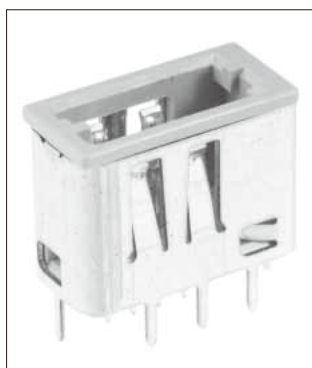

GT17H-4P-2DSA


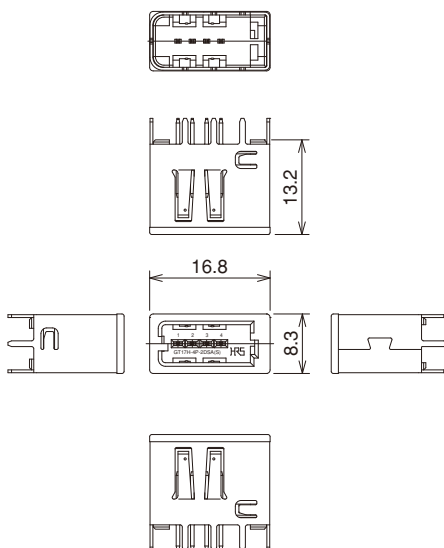


### Key Variation

|            |       |
|------------|-------|
|            |       |
| Standard   | Key B |
| Light Gray | Green |
|            |       |
| Key A      | Key C |
| Brown      | Blue  |

| Part No.         | HRS No.    | Color      | Material / Plating                                                                          | Packaging | RoHS |
|------------------|------------|------------|---------------------------------------------------------------------------------------------|-----------|------|
| GT17H-4P-2DSA    | 767-0181-2 | Light Gray | Housing:PPS<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 1         | YES  |
| GT17H-4P-2DSA(A) | 767-0182-5 | Brown      |                                                                                             |           |      |
| GT17H-4P-2DSA(B) | 767-0183-8 | Green      |                                                                                             |           |      |
| GT17H-4P-2DSA(C) | 767-0184-0 | Blue       |                                                                                             |           |      |

4 Pos. In-line Connectors

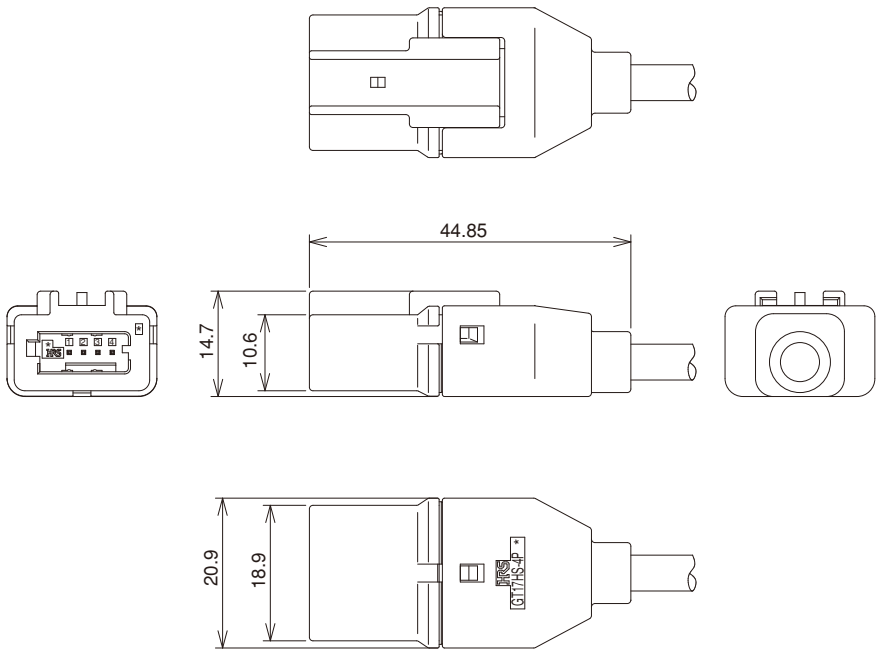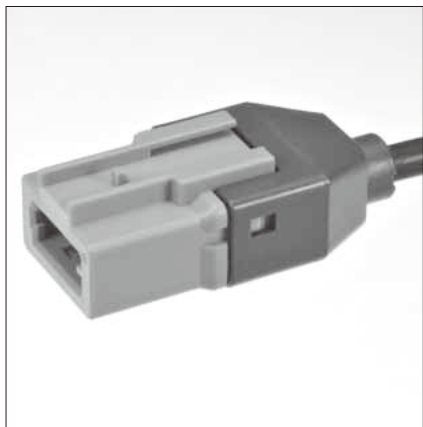

◆The product comprises 6 parts.  
(Housing, insulator, outer terminal, shield plate, retainer, and center terminal)

● Housing

| Part No.         | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|------------------|------------|-----------------------------|-----------|------|
| GT17HSP-4P-HU    | 767-0158-0 | PBT / Light Gray            | 1         | YES  |
| GT17HSP-4P-HU(A) | 767-0192-9 | PBT / Brown                 |           |      |
| GT17HSP-4P-HU(B) | 767-0193-1 | PBT / Green                 |           |      |
| GT17HSP-4P-HU(C) | 767-0194-4 | PBT / Blue                  |           |      |

● Insulator

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17HS-4P-2C | 767-0155-2 | PBT / Light Gray            | 1         | YES  |

● Outer terminal

| Part No.      | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging    | RoHS |
|---------------|------------|-----------------------------|----------------|--------------|------|
| GT17HS-4P-5CF | 767-0156-5 | Copper alloy / Tin plating  | φ4.8 to 5.2    | 800 pcs/reel | YES  |

● Shield plate

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17HS-4P-SC | 767-0157-8 | Copper alloy / Tin plating  | 1         | YES  |

● Retainer

| Part No.    | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|-------------|------------|-----------------------------|-----------|------|
| GT17HS-4P-R | 767-0159-3 | PBT / Dark Gray             | 1         | YES  |

● Center terminal

| Part No.     | HRS No.    | Material / Plating or Color   | Conductor Size(AWG) | Outer Diameter | Packaging       | RoHS |
|--------------|------------|-------------------------------|---------------------|----------------|-----------------|------|
| GT8E-2428PCF | 758-0067-6 | Phosphor Bronze / Tin plating | 24 to 28 AWG        | φ0.9 to 1.1    | 10,000 pcs/reel | YES  |

Key Variation


|            |       |
|------------|-------|
|            |       |
| Standard   | Key B |
| Light Gray | Green |
|            |       |
| Key A      | Key C |
| Brown      | Blue  |

◆Mating Table


| Color      | GT17HS-4Pos In-line connector | Cable side F connector   |
|------------|-------------------------------|--------------------------|
| Light Gray | GT17HSP-4P-ASSY               | GT17H-4S-ASSY            |
| Brown      | GT17HSP-4P-ASSY(Key typeA)    | GT17H-4S-ASSY(Key typeA) |
| Green      | GT17HSP-4P-ASSY(Key typeB)    | GT17H-4S-ASSY(Key typeB) |
| Blue       | GT17HSP-4P-ASSY(Key typeC)    | GT17H-4S-ASSY(Key typeC) |

## ◆ Wiring Method (4 Pos. In-line Connector)


- ① Insert retainer to the cable.




- ② Strip Jacket.




- ③ Turn Outer shield to backward.



- ④ Cover the cable by conductive tape.



- ⑤ Cut extra outer shield.




- ⑥ Strip Jacket.




- ⑦ Crimp the terminal.



- ⑧ Insert terminal to the Insulator.

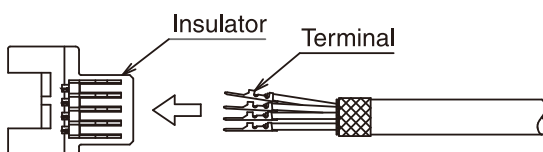


- ⑨ Set the insulator to the outer tube terminal.

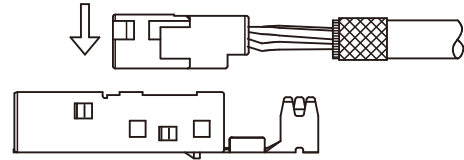


- ⑩ Crimp the outertube terminal.




- ⑪ Set the shield cover to the outer tube terminal.

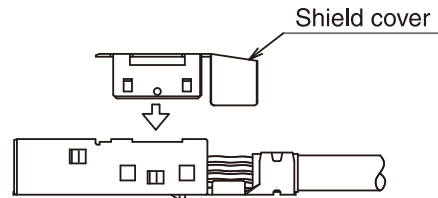

- ⑫ Insert the outer tube terminal to the housing.



- ⑬ Slide up the retainer to the housing.




- ⑭ Finish




\* Concerning the crimp height of terminals, crimp height settings have been prepared for each type of cable. Please contact a Hirose Electric account representative for further information.

Please note that new crimp height settings will be made for new cables and that this might take several days.

4 Pos. Right-angle Connectors

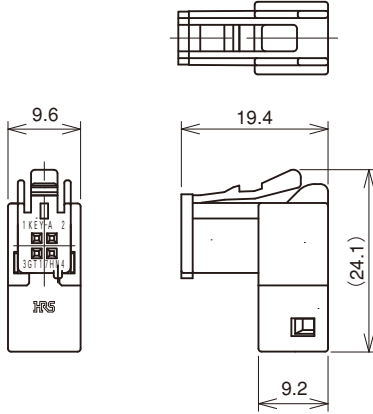

Key Variation



◆The product comprises 5 parts.  
(Housing, insulator, outer terminal, retainer, center terminal)

● Housing

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17HN-4DS-HU | 767-0141-8 | PBT / Dark Gray             | 1         | YES  |

● Insulator

| Part No.         | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|------------------|------------|-----------------------------|-----------|------|
| GT17HN-4DS-2C(A) | 767-0140-5 | PBT / Brown                 | 1         | YES  |
| GT17HN-4DS-2C(B) | 767-0147-4 | PBT / Green                 |           |      |
| GT17HN-4DS-2C(C) | 767-0148-7 | PBT / Blue                  |           |      |

● Outer terminal

| Part No.       | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|----------------|------------|-----------------------------|----------------|-----------|------|
| GT17HN-4DS-5CF | 767-0142-0 | Copper alloy / Tin plating  | φ4.8 to 5.2    | 1         | YES  |

● Retainer

| Part No.     | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|--------------|------------|-----------------------------|-----------|------|
| GT17HN-4DS-R | 767-0143-3 | PBT / Dark Gray             | 1         | YES  |

● Center terminal


| Part No.        | HRS No.       | Material / Plating or Color   | Conductor Size(AWG) | Outer Diameter | Packaging       | RoHS |
|-----------------|---------------|-------------------------------|---------------------|----------------|-----------------|------|
| GT8-2428SCF(70) | 758-0001-8 70 | Phosphor Bronze / Tin plating | 24 to 28 AWG        | φ0.8 to 1.5    | 10,000 pcs/reel | YES  |

◆ Mating Table


| Color | Cable side connector        | Board connector                                                                                                                                           |                                                                                                           |
|-------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
|       |                             | SMT Type                                                                                                                                                  | DIP Type                                                                                                  |
| Brown | GT17HN-4DS-ASSY (Key typeA) | GT17HN-4DP-2H(A)<br>GT17HN-4DP-2H(A)(11)<br>GT17HN-4DP-2H(A)(14)<br>GT17HNR-4DP-2H(A)<br>GT17HNL-4DP-2H(A)<br>GT17HN-4/4DP-2H(AA)<br>GT17HND-4/4DP-2H(AA) | GT17HJ-4DP-2DSA<br>GT17HG-4DP-2DSA(A)<br>GT17HN-4DP-2DS(A)<br>GT17HNF-4DP-2DS(A)<br>GT17HN-4DP-2DS(A)(10) |
| Green | GT17HN-4DS-ASSY (Key typeB) | GT17HN-4DP-2H(B)<br>GT17HN-4DP-2H(B)(11)<br>GT17HN-4DP-2H(B)(14)<br>GT17HNL-4DP-2H(B)<br>GT17HN-4/4DP-2H(BC)(14)<br>GT17HN-4/4DP-2H(BC)                   | GT17HG-4DP-2DSA(B)<br>GT17HN-4DP-2DS(B)<br>GT17HN-4DP-2DS(B)(10)                                          |
| Blue  | GT17HN-4DS-ASSY (Key typeC) | GT17HN-4DP-2H(C)<br>GT17HN-4DP-2H(C)(11)<br>GT17HN-4DP-2H(C)(14)<br>GT17HNL-4DP-2H(C)<br>GT17HN-4/4DP-2H(BC)<br>GT17HN-4/4DP-2H(BC)(14)                   | GT17HG-4DP-2DSA(C)<br>GT17HN-4DP-2DS(C)<br>GT17HN-4DP-2DS(C)(10)                                          |

## ◆ Wiring Method (4-Conductor Right-angle Connectors)


### ① Strip Jacket.




### ② Turn Outer shield to backward.



### ③ Cover the cable by conductive tape.



### ④ Cut extra outer shield.




### ⑤ Strip Jacket.




### ⑥ Crimp the terminal.




### ⑦ Insert terminal to the Insulator.




### ⑧ Insert insulator to the Outer tube terminal.




### ⑨ Crimp the outer tube terminal.




### ⑩ Insert the assembled outer tube terminal to the housing.



### ⑪ Set the Retainer.




### ⑫ Finish.




\* Concerning the crimp height of terminals, crimp height settings have been prepared for each type of cable. Please contact a Hirose Electric account representative for further information.  
Please note that new crimp height settings will be made for new cables and that this might take several days.

## 4 Pos. Right-angle Connectors (downward) With lock guard

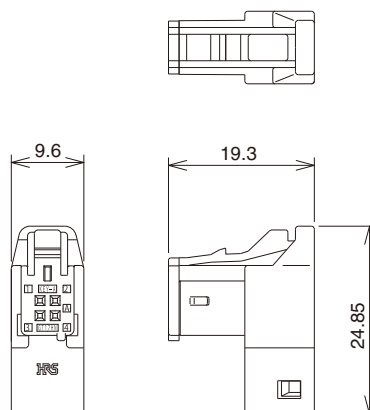


### Key Variation




Key A

Brown



Key B

Green



Key C

Blue

◆ The product comprises 5 parts.  
(Housing, insulator, outer terminal, retainer, center terminal)

#### ● Housing

| Part No.       | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|----------------|------------|-----------------------------|-----------|------|
| GT17HN2-4DS-HU | 767-0264-8 | PBT / Dark Gray             | 1         | YES  |

#### ● Insulator

| Part No.         | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|------------------|------------|-----------------------------|-----------|------|
| GT17HN-4DS-2C(A) | 767-0140-5 | PBT / Brown                 | 1         | YES  |
| GT17HN-4DS-2C(B) | 767-0147-4 | PBT / Green                 |           |      |
| GT17HN-4DS-2C(C) | 767-0148-7 | PBT / Blue                  |           |      |

#### ● Outer terminal

| Part No.        | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|-----------------|------------|-----------------------------|----------------|-----------|------|
| GT17HNX-4DS-5CF | 767-0179-0 | Copper alloy / Tin plating  | φ4.8 to 5.2    | 1         | YES  |

#### ● Retainer

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17HN2-4DS-R | 767-0268-9 | PBT / Dark Gray             | 1         | YES  |

#### ● Center terminal


| Part No.        | HRS No.       | Material / Plating or Color   | Conductor Size(AWG) | Outer Diameter | Packaging       | RoHS |
|-----------------|---------------|-------------------------------|---------------------|----------------|-----------------|------|
| GT8-2428SCF(70) | 758-0001-8 70 | Phosphor Bronze / Tin plating | 24 to 28 AWG        | φ0.8 to 1.5    | 10,000 pcs/reel | YES  |

### ◆ Mating Table

| Color | Cable side connector        | Board connector         |                                                                                                           |
|-------|-----------------------------|-------------------------|-----------------------------------------------------------------------------------------------------------|
|       |                             | SMT Type                | DIP Type                                                                                                  |
| Brown | GT17HN2-4DS-ASSY(Key typeA) | GT17HN-4DP-2H(A)        | GT17HJ-4DP-2DSA<br>GT17HG-4DP-2DSA(A)<br>GT17HN-4DP-2DS(A)<br>GT17HNF-4DP-2DS(A)<br>GT17HN-4DP-2DS(A)(10) |
|       |                             | GT17HN-4DP-2H(A)(11)    |                                                                                                           |
|       |                             | GT17HN-4DP-2H(A)(14)    |                                                                                                           |
|       |                             | GT17HNR-4DP-2H(A)       |                                                                                                           |
|       |                             | GT17HNL-4DP-2H(A)       |                                                                                                           |
|       |                             | GT17HN-4/4DP-2H(AA)     |                                                                                                           |
|       |                             | GT17HND-4/4DP-2H(AA)    |                                                                                                           |
| Green | GT17HN2-4DS-ASSY(Key typeB) | GT17HN-4DP-2H(B)        | GT17HG-4DP-2DSA(B)<br>GT17HN-4DP-2DS(B)<br>GT17HN-4DP-2DS(B)(10)                                          |
|       |                             | GT17HN-4DP-2H(B)(11)    |                                                                                                           |
|       |                             | GT17HN-4DP-2H(B)(14)    |                                                                                                           |
|       |                             | GT17HNL-4DP-2H(B)       |                                                                                                           |
|       |                             | GT17HN-4/4DP-2H(BC)(14) |                                                                                                           |
|       |                             | GT17HN-4/4DP-2H(BC)     |                                                                                                           |
|       |                             | GT17HN-4/4DP-2H(BC)(14) |                                                                                                           |
| Blue  | GT17HN2-4DS-ASSY(Key typeC) | GT17HN-4DP-2H(C)        | GT17HG-4DP-2DSA(C)<br>GT17HN-4DP-2DS(C)<br>GT17HN-4DP-2DS(C)(10)                                          |
|       |                             | GT17HN-4DP-2H(C)(11)    |                                                                                                           |
|       |                             | GT17HN-4DP-2H(C)(14)    |                                                                                                           |
|       |                             | GT17HNL-4DP-2H(C)       |                                                                                                           |
|       |                             | GT17HN-4/4DP-2H(BC)     |                                                                                                           |
|       |                             | GT17HN-4/4DP-2H(BC)(14) |                                                                                                           |
|       |                             | GT17HN-4/4DP-2H(BC)(14) |                                                                                                           |

## Plug Connectors

### 4 Pos. 45 degree angle type

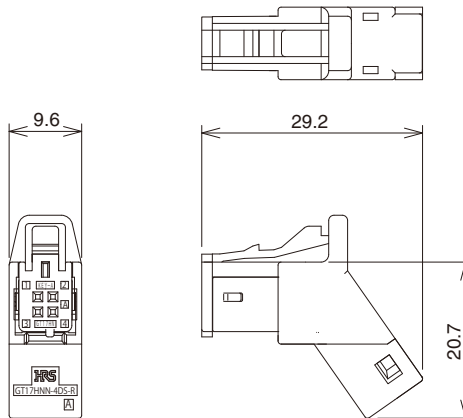

#### Key Variation

|       |        |   |
|-------|--------|---|
| 1     | KEY-A  | 2 |
| 3     | GT17HN | 4 |
| Key A |        |   |
| Brown |        |   |
| 1     | KEY-B  | 2 |
| 3     | GT17HN | 4 |
| Key B |        |   |
| Green |        |   |
| 1     | KEY-C  | 2 |
| 3     | GT17HN | 4 |
| Key C |        |   |
| Blue  |        |   |

- ◆ The product comprises 5 parts.  
(Housing, insulator, outer terminal, retainer, center terminal)

#### ● Housing

| Part No.       | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|----------------|------------|-----------------------------|-----------|------|
| GT17HNN-4DS-HU | 767-0187-9 | PBT / Dark Gray             | 1         | YES  |

#### ● Insulator

| Part No.         | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|------------------|------------|-----------------------------|-----------|------|
| GT17HN-4DS-2C(A) | 767-0140-5 | PBT / Brown                 | 1         | YES  |
| GT17HN-4DS-2C(B) | 767-0147-4 | PBT / Green                 |           |      |
| GT17HN-4DS-2C(C) | 767-0148-7 | PBT / Blue                  |           |      |

#### ● Outer terminal

| Part No.        | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|-----------------|------------|-----------------------------|----------------|-----------|------|
| GT17HNN-4DS-5CF | 767-0189-4 | Copper alloy / Tin plating  | φ 4.8 to 5.2   | 1         | YES  |

#### ● Retainer

| Part No.      | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|---------------|------------|-----------------------------|-----------|------|
| GT17HNN-4DS-R | 767-0188-1 | PBT / Dark Gray             | 1         | YES  |

#### ● Center terminal



| Part No.        | HRS No.       | Material / Plating or Color   | Conductor Size(AWG) | Outer Diameter | Packaging       | RoHS |
|-----------------|---------------|-------------------------------|---------------------|----------------|-----------------|------|
| GT8-2428SCF(70) | 758-0001-8 70 | Phosphor Bronze / Tin plating | 24 to 28 AWG        | φ 0.8 to 1.5   | 10,000 pcs/reel | YES  |

#### ◆ Mating Table


| Color | Cable side connector        | Board connector                                                                                                                                           |                                                                                                            |
|-------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
|       |                             | SMT Type                                                                                                                                                  | DIP Type                                                                                                   |
| Brown | GT17HNN-4DS-ASSY(Key typeA) | GT17HN-4DP-2H(A)<br>GT17HN-4DP-2H(A)(11)<br>GT17HN-4DP-2H(A)(14)<br>GT17HNR-4DP-2H(A)<br>GT17HNL-4DP-2H(A)<br>GT17HN-4/4DP-2H(AA)<br>GT17HND-4/4DP-2H(AA) | GT17HJ-4DP-2DSA<br>GT17HG-4DP-2DSA(A)<br>GT17HNN-4DP-2DS(A)<br>GT17HNF-4DP-2DS(A)<br>GT17HN-4DP-2DS(A)(10) |
| Green | GT17HNN-4DS-ASSY(Key typeB) | GT17HN-4DP-2H(B)<br>GT17HN-4DP-2H(B)(11)<br>GT17HN-4DP-2H(B)(14)<br>GT17HNL-4DP-2H(B)<br>GT17HN-4/4DP-2H(BC)(14)<br>GT17HN-4/4DP-2H(BC)                   | GT17HG-4DP-2DSA(B)<br>GT17HNN-4DP-2DS(B)<br>GT17HN-4DP-2DS(B)(10)                                          |
| Blue  | GT17HNN-4DS-ASSY(Key typeC) | GT17HN-4DP-2H(C)<br>GT17HN-4DP-2H(C)(11)<br>GT17HN-4DP-2H(C)(14)<br>GT17HNL-4DP-2H(C)<br>GT17HN-4/4DP-2H(BC)<br>GT17HN-4/4DP-2H(BC)(14)                   | GT17HG-4DP-2DSA(C)<br>GT17HNN-4DP-2DS(C)<br>GT17HN-4DP-2DS(C)(10)                                          |

## ■ Plug

### 4 Pos. Right angle (leftward)

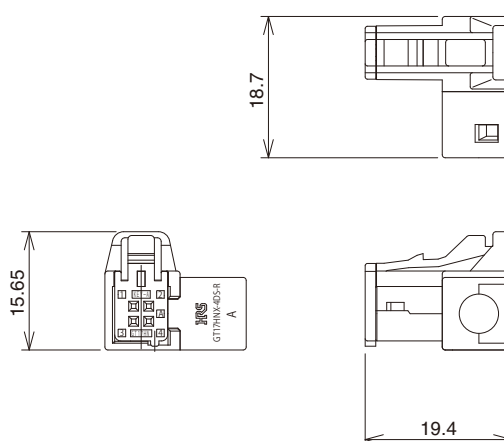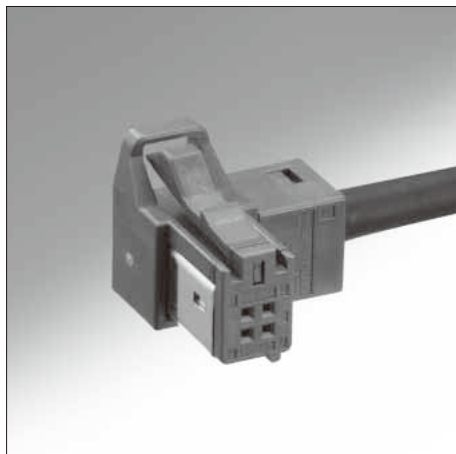


#### Key Variation




Key A

Brown



Key B

Green



Key C

Blue

◆ The product comprises 5 parts.  
(Housing, insulator, outer terminal, retainer, center terminal)

#### ● Housing

| Part No.       | HRS No.       | Material / Plating or Color | Packaging | RoHS |
|----------------|---------------|-----------------------------|-----------|------|
| GT17HNL-4DS-HU | 767-0302-5 00 | PBT / Dark Gray             | 1         | YES  |

#### ● Insulator

| Part No.         | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|------------------|------------|-----------------------------|-----------|------|
| GT17HN-4DS-2C(A) | 767-0140-5 | PBT / Brown                 | 1         | YES  |
| GT17HN-4DS-2C(B) | 767-0147-4 | PBT / Green                 |           |      |
| GT17HN-4DS-2C(C) | 767-0148-7 | PBT / Blue                  |           |      |

#### ● Outer terminal

| Part No.        | HRS No.       | Material / Plating or Color | Packaging | RoHS |
|-----------------|---------------|-----------------------------|-----------|------|
| GT17HNL-4DS-5CF | 767-0301-2 00 | Copper alloy / Tin plating  | 1         | YES  |

#### ● Retainer

| Part No.      | HRS No.       | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|---------------|---------------|-----------------------------|----------------|-----------|------|
| GT17HNX-4DS-R | 767-0180-0 00 | PBT / Dark Gray             | φ 4.8 to 5.2   | 1         | YES  |



#### ● Center terminal

| Part No.        | HRS No.       | Material / Plating or Color   | Conductor Size(AWG) | Outer Diameter | Packaging       | RoHS |
|-----------------|---------------|-------------------------------|---------------------|----------------|-----------------|------|
| GT8-2428SCF(70) | 758-0001-8 70 | Phosphor Bronze / Tin plating | 24 to 28 AWG        | φ 0.8 to 1.5   | 10,000 pcs/reel | YES  |


#### ◆ Mating Table

| Color | Cable side connector        | Board connector                                                                                                                                           |                                                                                                           |
|-------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
|       |                             | SMT Type                                                                                                                                                  | DIP Type                                                                                                  |
| Brown | GT17HNL-4DS-ASSY(Key TypeA) | GT17HN-4DP-2H(A)<br>GT17HN-4DP-2H(A)(11)<br>GT17HN-4DP-2H(A)(14)<br>GT17HNR-4DP-2H(A)<br>GT17HNL-4DP-2H(A)<br>GT17HN-4/4DP-2H(AA)<br>GT17HND-4/4DP-2H(AA) | GT17HJ-4DP-2DSA<br>GT17HG-4DP-2DSA(A)<br>GT17HN-4DP-2DS(A)<br>GT17HNF-4DP-2DS(A)<br>GT17HN-4DP-2DS(A)(10) |
| Green | GT17HNL-4DS-ASSY(Key TypeB) | GT17HN-4DP-2H(B)<br>GT17HN-4DP-2H(B)(11)<br>GT17HN-4DP-2H(B)(14)<br>GT17HNL-4DP-2H(B)<br>GT17HN-4/4DP-2H(BC)(14)<br>GT17HN-4/4DP-2H(BC)                   | GT17HG-4DP-2DSA(B)<br>GT17HN-4DP-2DS(B)<br>GT17HN-4DP-2DS(B)(10)                                          |
| Blue  | GT17HNL-4DS-ASSY(Key TypeC) | GT17HN-4DP-2H(C)<br>GT17HN-4DP-2H(C)(11)<br>GT17HN-4DP-2H(C)(14)<br>GT17HNL-4DP-2H(C)<br>GT17HN-4/4DP-2H(BC)<br>GT17HN-4/4DP-2H(BC)(14)                   | GT17HG-4DP-2DSA(C)<br>GT17HN-4DP-2DS(C)<br>GT17HN-4DP-2DS(C)(10)                                          |

## 4-Conductor Straight Connectors

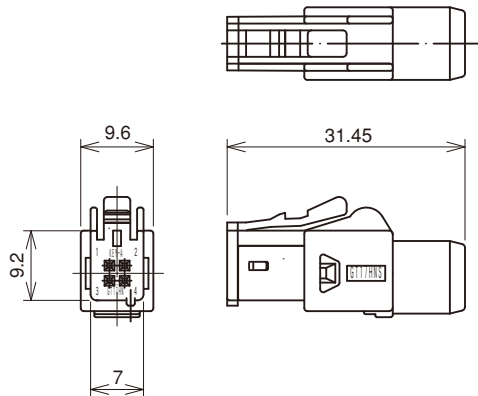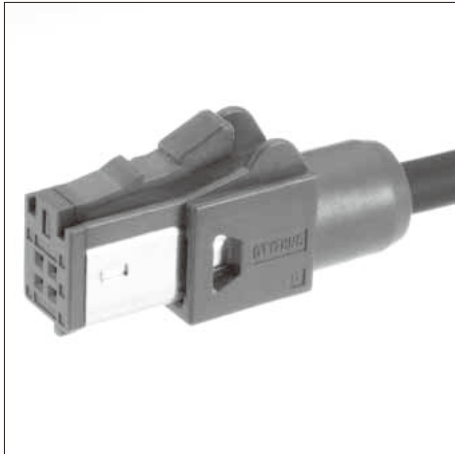

### Key Variation



◆The product comprises 4 parts.  
(Housing, insulator, outer terminal, center terminal)

#### ● Housing

| Part No.       | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|----------------|------------|-----------------------------|-----------|------|
| GT17HNS-4DS-HU | 767-0150-9 | PBT / Dark Gray             | 1         | YES  |

#### ● Insulator

| Part No.         | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|------------------|------------|-----------------------------|-----------|------|
| GT17HN-4DS-2C(A) | 767-0140-5 | PBT / Brown                 | 1         | YES  |
| GT17HN-4DS-2C(B) | 767-0147-4 | PBT / Green                 |           |      |
| GT17HN-4DS-2C(C) | 767-0148-7 | PBT / Blue                  |           |      |

#### ● Outer terminal

| Part No.        | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|-----------------|------------|-----------------------------|----------------|-----------|------|
| GT17HNS-4DS-5CF | 767-0151-1 | Copper alloy / Tin plating  | φ 4.8 to 5.2   | 1         | YES  |

#### ● Center terminal


| Part No.        | HRS No.       | Material / Plating or Color   | Conductor Size(AWG) | Outer Diameter | Packaging       | RoHS |
|-----------------|---------------|-------------------------------|---------------------|----------------|-----------------|------|
| GT8-2428SCF(70) | 758-0001-8 70 | Phosphor Bronze / Tin plating | 24 to 28 AWG        | φ 0.8 to 1.5   | 10,000 pcs/reel | YES  |

### ◆Mating Table


| Color | Cable side connector        | Board connector                                                                                                                                           |                                                                                                           |
|-------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
|       |                             | SMT Type                                                                                                                                                  | DIP Type                                                                                                  |
| Brown | GT17HNS-4DS-ASSY(Key TypeA) | GT17HN-4DP-2H(A)<br>GT17HN-4DP-2H(A)(11)<br>GT17HN-4DP-2H(A)(14)<br>GT17HNR-4DP-2H(A)<br>GT17HNL-4DP-2H(A)<br>GT17HN-4/4DP-2H(AA)<br>GT17HND-4/4DP-2H(AA) | GT17HJ-4DP-2DSA<br>GT17HG-4DP-2DSA(A)<br>GT17HN-4DP-2DS(A)<br>GT17HNF-4DP-2DS(A)<br>GT17HN-4DP-2DS(A)(10) |
| Green | GT17HNS-4DS-ASSY(Key TypeB) | GT17HN-4DP-2H(B)<br>GT17HN-4DP-2H(B)(11)<br>GT17HN-4DP-2H(B)(14)<br>GT17HNL-4DP-2H(B)<br>GT17HN-4/4DP-2H(BC)(14)<br>GT17HN-4/4DP-2H(BC)                   | GT17HG-4DP-2DSA(B)<br>GT17HN-4DP-2DS(B)<br>GT17HN-4DP-2DS(B)(10)                                          |
| Blue  | GT17HNS-4DS-ASSY(Key TypeC) | GT17HN-4DP-2H(C)<br>GT17HN-4DP-2H(C)(11)<br>GT17HN-4DP-2H(C)(14)<br>GT17HNL-4DP-2H(C)<br>GT17HN-4/4DP-2H(BC)<br>GT17HN-4/4DP-2H(BC)(14)                   | GT17HG-4DP-2DSA(C)<br>GT17HN-4DP-2DS(C)<br>GT17HN-4DP-2DS(C)(10)                                          |

## ◆ Wiring Method (4-Conductor Straight Connectors)


- ① Insert housing to the cable.

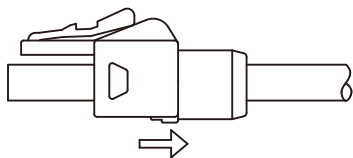


- ② Strip Jacket.




- ③ Turn Outer shield to backward.



- ④ Cover the cable by conductive tape.



- ⑤ Cut extra outer shield.




- ⑥ Strip Jacket.




- ⑦ Crimp the terminal.



- ⑧ Insert center terminal to the Insulator.




- ⑨ Set outer tube terminal to the insulator.




- ⑩ Crimp outertube terminal.



- ⑪ Slide up housing to outer tube terminal.




- ⑫ Finish.




\* Concerning the crimp height of terminals, crimp height settings have been prepared for each type of cable. Please contact a Hirose Electric account representative for further information.  
Please note that new crimp height settings will be made for new cables and that this might take several days.

## ■ 4 Pos. Straight plug Connector With lock guard

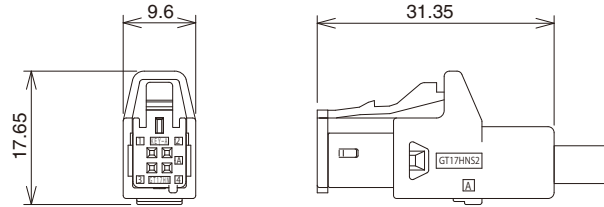

### Key Variation

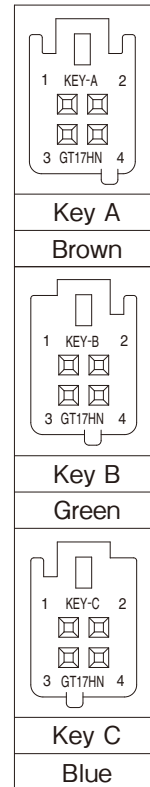

◆ The product comprises 4 parts.  
(Housing, insulator, outer terminal, center terminal)

#### ● Housing

| Part No.        | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|-----------------|------------|-----------------------------|-----------|------|
| GT17HNS2-4DS-HU | 767-0190-3 | PBT / Dark Gray             | 1         | YES  |

#### ● Insulator

| Part No.         | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|------------------|------------|-----------------------------|-----------|------|
| GT17HN-4DS-2C(A) | 767-0140-5 | PBT / Brown                 | 1         | YES  |
| GT17HN-4DS-2C(B) | 767-0147-4 | PBT / Green                 |           |      |
| GT17HN-4DS-2C(C) | 767-0148-7 | PBT / Blue                  |           |      |

#### ● Outer terminal

| Part No.        | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|-----------------|------------|-----------------------------|----------------|-----------|------|
| GT17HNS-4DS-5CF | 767-0151-1 | Copper alloy / Tin plating  | φ 4.8 to 5.2   | 1         | YES  |

#### ● Center terminal

| Part No.        | HRS No.       | Material / Plating or Color   | Conductor Size(AWG) | Outer Diameter | Packaging       | RoHS |
|-----------------|---------------|-------------------------------|---------------------|----------------|-----------------|------|
| GT8-2428SCF(70) | 758-0001-8 70 | Phosphor Bronze / Tin plating | 24 to 28 AWG        | φ 0.8 to 1.5   | 10,000 pcs/reel | YES  |

### ◆ Mating Table


| Color | Cable side connector         | Board connector                                                                                                                                           |                                                                                                           |
|-------|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
|       |                              | SMT Type                                                                                                                                                  | DIP Type                                                                                                  |
| Brown | GT17HNS2-4DS-ASSY(Key typeA) | GT17HN-4DP-2H(A)<br>GT17HN-4DP-2H(A)(11)<br>GT17HN-4DP-2H(A)(14)<br>GT17HNR-4DP-2H(A)<br>GT17HNL-4DP-2H(A)<br>GT17HN-4/4DP-2H(AA)<br>GT17HND-4/4DP-2H(AA) | GT17HJ-4DP-2DSA<br>GT17HG-4DP-2DSA(A)<br>GT17HN-4DP-2DS(A)<br>GT17HNF-4DP-2DS(A)<br>GT17HN-4DP-2DS(A)(10) |
| Green | GT17HNS2-4DS-ASSY(Key typeB) | GT17HN-4DP-2H(B)<br>GT17HN-4DP-2H(B)(11)<br>GT17HN-4DP-2H(B)(14)<br>GT17HNL-4DP-2H(B)<br>GT17HN-4/4DP-2H(BC)(14)<br>GT17HN-4/4DP-2H(BC)                   | GT17HG-4DP-2DSA(B)<br>GT17HN-4DP-2DS(B)<br>GT17HN-4DP-2DS(B)(10)                                          |
| Blue  | GT17HNS2-4DS-ASSY(Key typeC) | GT17HN-4DP-2H(C)<br>GT17HN-4DP-2H(C)(11)<br>GT17HN-4DP-2H(C)(14)<br>GT17HNL-4DP-2H(C)<br>GT17HN-4/4DP-2H(BC)<br>GT17HN-4/4DP-2H(BC)(14)                   | GT17HG-4DP-2DSA(C)<br>GT17HN-4DP-2DS(C)<br>GT17HN-4DP-2DS(C)(10)                                          |

■ 4 pos. SMT Connector


● With M2.6 screw flange



GT17HN-4DP-2H(A)

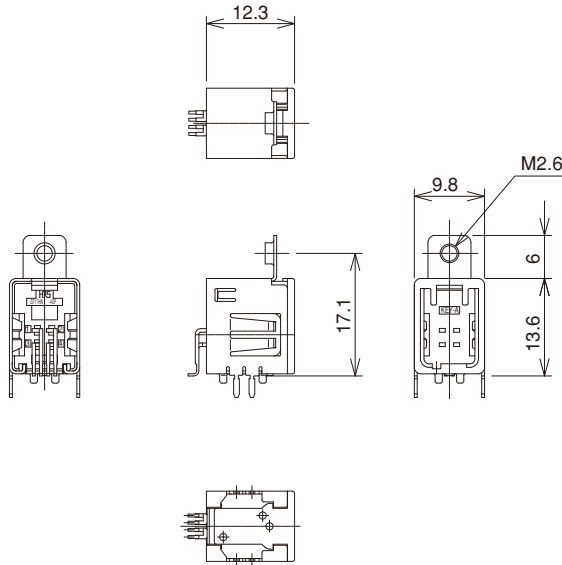

Key Variation




| Part No.         | HRS No.    | Color | Material / Plating                      | Packaging | RoHS |
|------------------|------------|-------|-----------------------------------------|-----------|------|
| GT17HN-4DP-2H(A) | 767-0144-6 | Brown | Housing:PPS                             | 1         | YES  |
| GT17HN-4DP-2H(B) | 767-0175-0 | Green | Center terminal:Brass/Tin plating       |           |      |
| GT17HN-4DP-2H(C) | 767-0176-2 | Blue  | Outer terminal:Copper alloy/Tin plating |           |      |


● With 3.0 dia. hole flange



GT17HN-4DP-2H(A)(11)

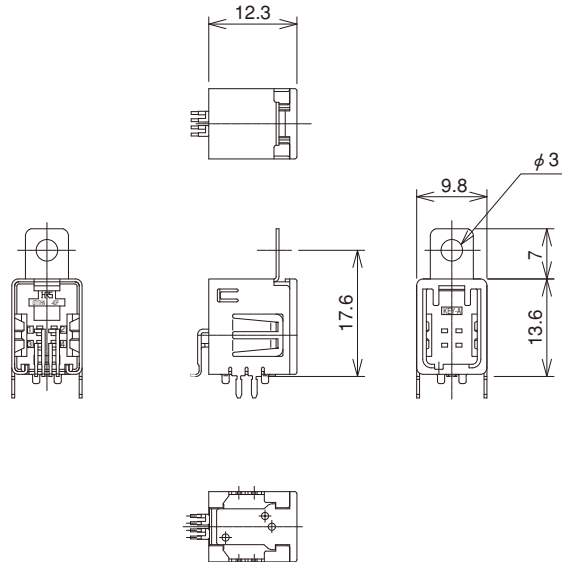

Key Variation




| Part No.             | HRS No.       | Color | Material / Plating                      | Packaging | RoHS |
|----------------------|---------------|-------|-----------------------------------------|-----------|------|
| GT17HN-4DP-2H(A)(11) | 767-0144-6 11 | Brown | Housing:PPS                             | 1         | YES  |
| GT17HN-4DP-2H(B)(11) | 767-0175-0 11 | Green | Center terminal:Brass/Tin plating       |           |      |
| GT17HN-4DP-2H(C)(11) | 767-0176-2 11 | Blue  | Outer terminal:Copper alloy/Tin plating |           |      |



● Without flange



GT17HN-4DP-2H(A)(14)

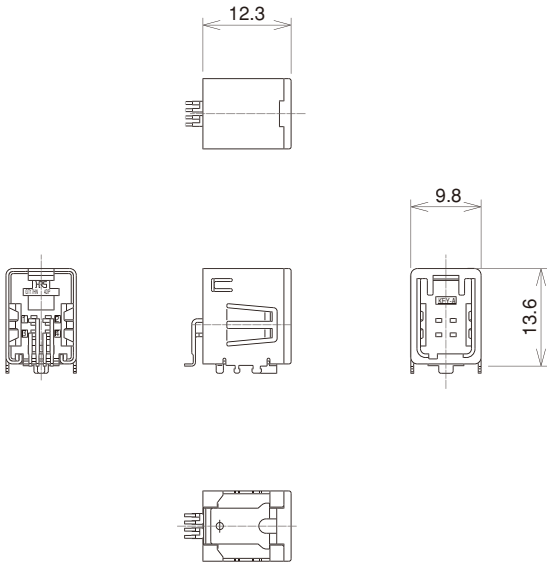

Key Variation


|                                                                                     |
|-------------------------------------------------------------------------------------|
|  |
| Key A                                                                               |
| Brown                                                                               |
|  |
| Key B                                                                               |
| Green                                                                               |
|  |
| Key C                                                                               |
| Blue                                                                                |

| Part No.             | HRS No.       | Color | Material / Plating                      | Packaging    | RoHS |
|----------------------|---------------|-------|-----------------------------------------|--------------|------|
| GT17HN-4DP-2H(A)(14) | 767-0144-6 14 | Brown | Housing:PPS                             | 300 pcs/reel | YES  |
| GT17HN-4DP-2H(B)(14) | 767-0175-0 14 | Green | Center terminal:Brass/Tin plating       |              |      |
| GT17HN-4DP-2H(C)(14) | 767-0176-2 14 | Blue  | Outer terminal:Copper alloy/Tin plating |              |      |



● M2.5 Screw with Left flange



GT17HNL-4DP-2H(A)

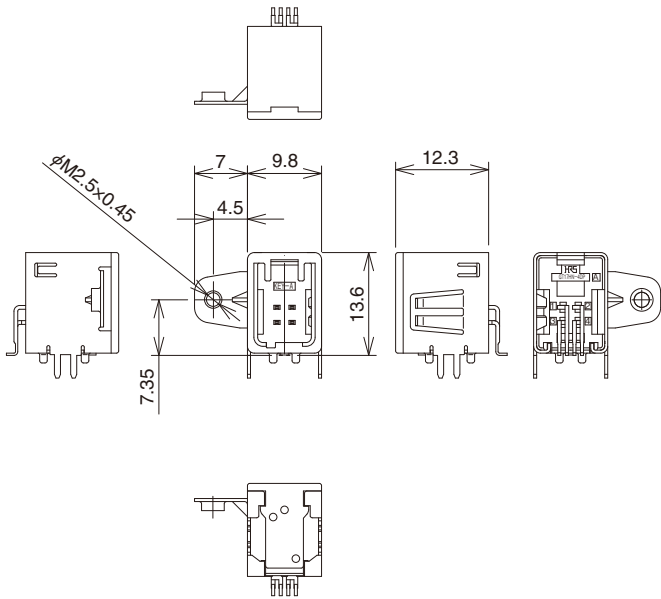

Key Variation


|                                                                                     |
|-------------------------------------------------------------------------------------|
|  |
| Key A                                                                               |
| Brown                                                                               |
|  |
| Key B                                                                               |
| Green                                                                               |

| Part No.          | HRS No.    | Color | Material / Plating                                                                          | Packaging | RoHS |
|-------------------|------------|-------|---------------------------------------------------------------------------------------------|-----------|------|
| GT17HNL-4DP-2H(A) | 767-0229-7 | Brown | Housing:PPS<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 1         | YES  |
| GT17HNL-4DP-2H(B) | 767-0237-5 | Green |                                                                                             |           |      |

● M2.6 Screw with Right flange




GT17HNR-4DP-2H(A)

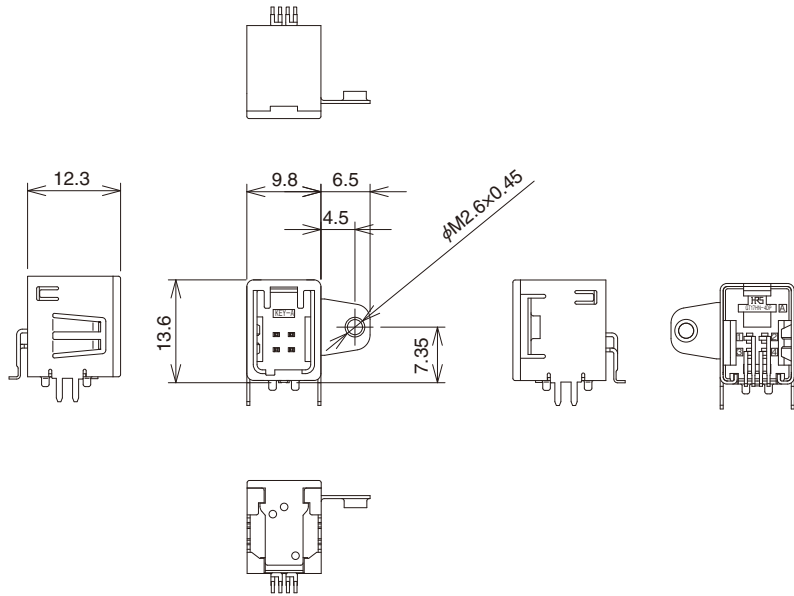


| Part No.          | HRS No.    | Color | Material / Plating                                                                          | Packaging | RoHS |
|-------------------|------------|-------|---------------------------------------------------------------------------------------------|-----------|------|
| GT17HNR-4DP-2H(A) | 767-0230-6 | Brown | Housing:PPS<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 1         | YES  |

## ■ 4 Pos. Boardside Right angle DIP Type

### ● With M2.6 flange

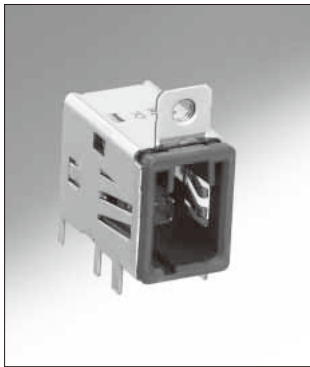

GT17HN-4DP-2DS(A)

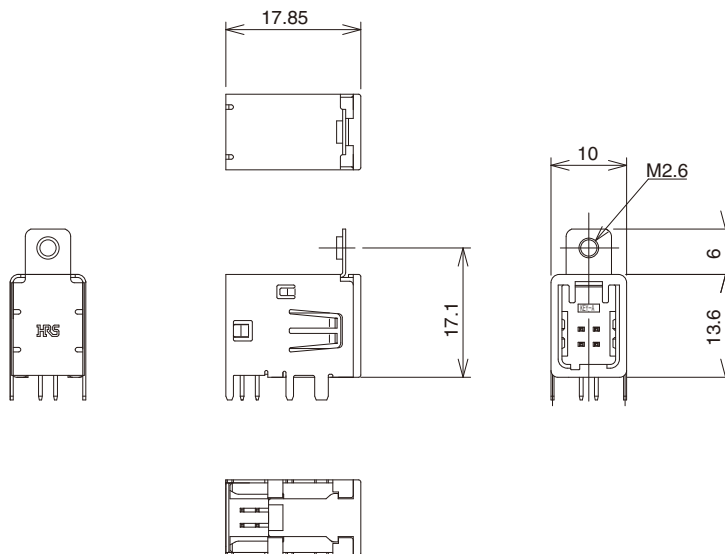

### Key Variation


|                |
|----------------|
|                |
| Key A<br>Brown |
|                |
| Key B<br>Green |
|                |
| Key C<br>Blue  |

| Part No.          | HRS No.       | Color | Material / Plating                                                                          | Packaging | RoHS |
|-------------------|---------------|-------|---------------------------------------------------------------------------------------------|-----------|------|
| GT17HN-4DP-2DS(A) | 767-0213-7 00 | Brown | Housing:PBT<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 1         | YES  |
| GT17HN-4DP-2DS(B) | 767-0266-3 00 | Green |                                                                                             |           |      |
| GT17HN-4DP-2DS(C) | 767-0265-0 00 | Blue  |                                                                                             |           |      |

### ● Without flange



GT17HN-4DP-2DS(A)(10)

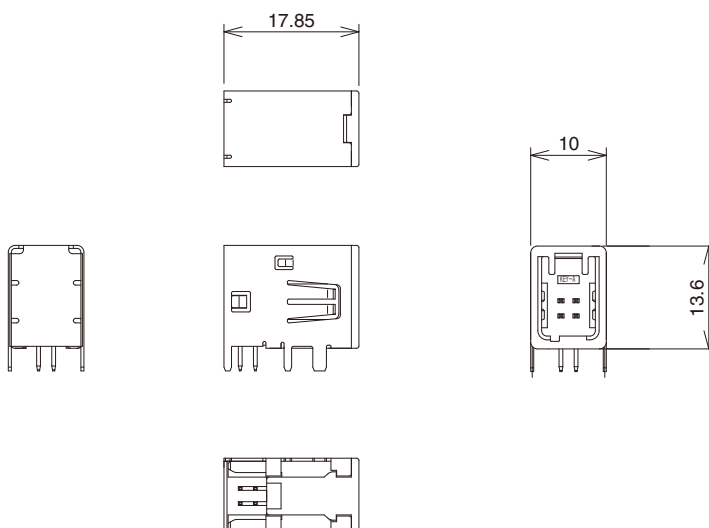

### Key Variation

|                |
|----------------|
|                |
| Key A<br>Brown |
|                |
| Key B<br>Green |
|                |
| Key C<br>Blue  |

| Part No.              | HRS No.       | Color | Material / Plating                                                                          | Packaging | RoHS |
|-----------------------|---------------|-------|---------------------------------------------------------------------------------------------|-----------|------|
| GT17HN-4DP-2DS(A)(10) | 767-0213-7 10 | Brown | Housing:PBT<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 1         | YES  |
| GT17HN-4DP-2DS(B)(10) | 767-0266-3 10 | Green |                                                                                             |           |      |
| GT17HN-4DP-2DS(C)(10) | 767-0265-0 10 | Blue  |                                                                                             |           |      |

GT5

GT13

GT16

PO5G

GT19

GT21

GT26

GT36

GT11

GT17

GT32

GT3

GT7

GT10

GT18W

GT25

GT8E


GT9

GT15

● Plug reverse



GT17HNF-4DP-2DS(A)

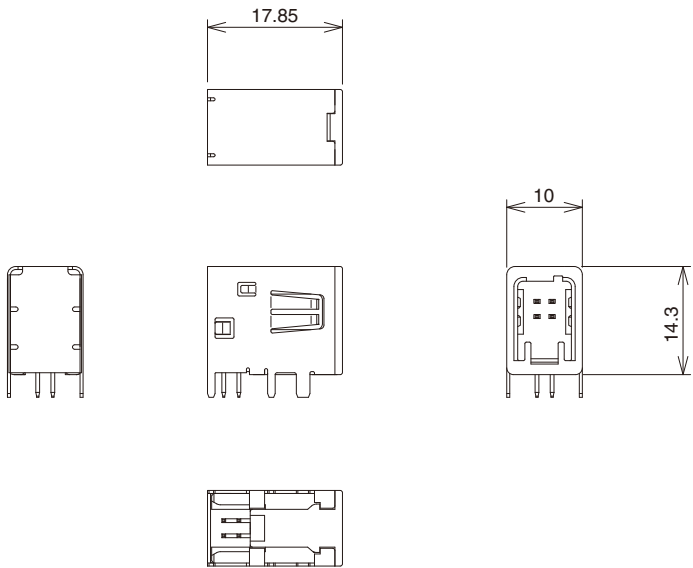

| Part No.           | HRS No.       | Color | Material / Plating                                                                          | Packaging | RoHS |
|--------------------|---------------|-------|---------------------------------------------------------------------------------------------|-----------|------|
| GT17HNF-4DP-2DS(A) | 767-0236-2 00 | Brown | Housing:PBT<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 1         | YES  |


■ 4-Conductor Board Connector(Straight)



GT17HJ-4DP-2DSA



GT17HG-4DP-2DSA(A)

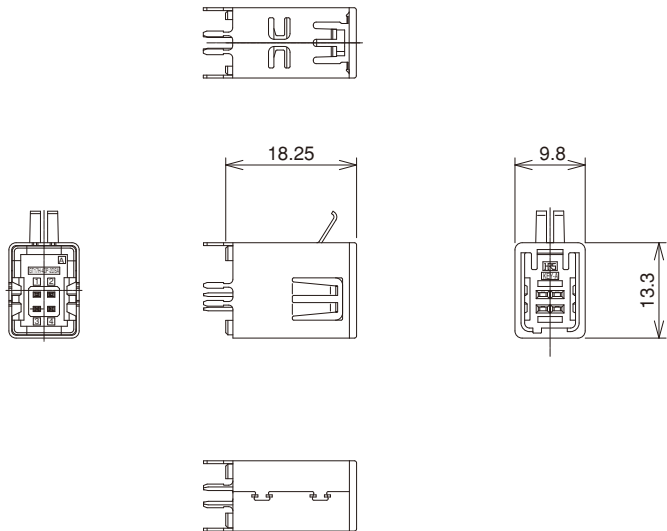


| Part No.           | HRS No.    | Color | Material / Plating or Color                                                                 | Packaging | RoHS |
|--------------------|------------|-------|---------------------------------------------------------------------------------------------|-----------|------|
| GT17HJ-4DP-2DSA    | 767-0160-2 | Brown | Housing:PPS<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 1         | YES  |
| GT17HG-4DP-2DSA(A) | 767-0314-4 |       |                                                                                             |           |      |
| GT17HG-4DP-2DSA(B) | 767-0315-7 | Green |                                                                                             |           |      |
| GT17HG-4DP-2DSA(C) | 767-0316-0 | Blue  |                                                                                             |           |      |
| GT17HG-4DP-2DSA(D) | 767-0317-2 | Black |                                                                                             |           |      |

## ■ 4/4 Pos. SMT Connectors

### ● With M2.6 screw flange



**GT17HN-4/4DP-2H(BC)**

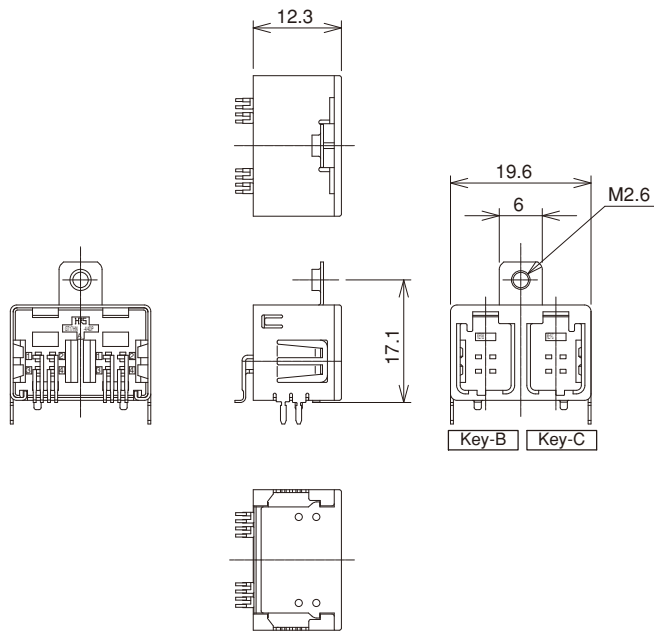


| Part No.             | HRS No.    | Color      | Material / Plating or Color                                                                 | Packaging | RoHS |
|----------------------|------------|------------|---------------------------------------------------------------------------------------------|-----------|------|
| GT17HN-4/4DP-2H(BC)  | 767-0145-9 | Light Gray | Housing:PPS<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 1         | YES  |
| GT17HND-4/4DP-2H(AA) | 767-0327-6 | Brown      |                                                                                             |           |      |

### ● Without flange



**GT17HN-4/4DP-2H(BC)(14)**

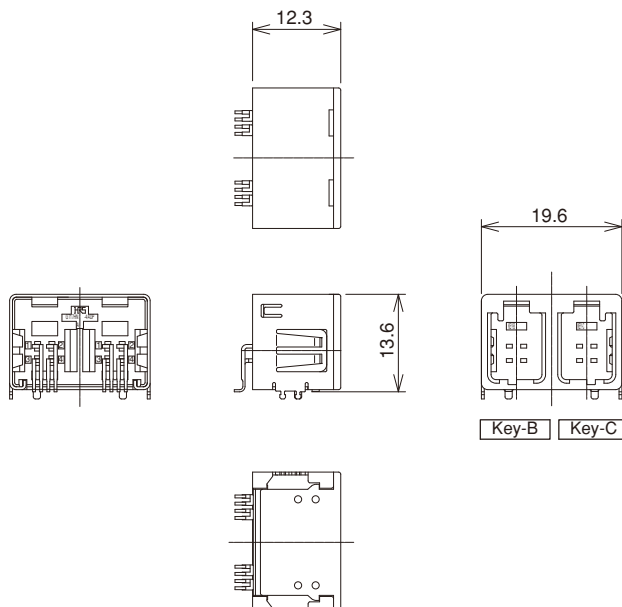

| Part No.                | HRS No.       | Color      | Material / Plating or Color                                                                 | Packaging    | RoHS |
|-------------------------|---------------|------------|---------------------------------------------------------------------------------------------|--------------|------|
| GT17HN-4/4DP-2H(BC)(14) | 767-0145-9 14 | Light Gray | Housing:PPS<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 200 pcs/reel | YES  |

GT5

GT13

GT16

PO5G

GT19

GT21

GT26

GT36

GT11

GT17

GT32

GT3

GT7

GT10

GT18W

GT25

GT8E



GT9

GT15

● Without flange





GT17HN-4/4DP-2H(AA)

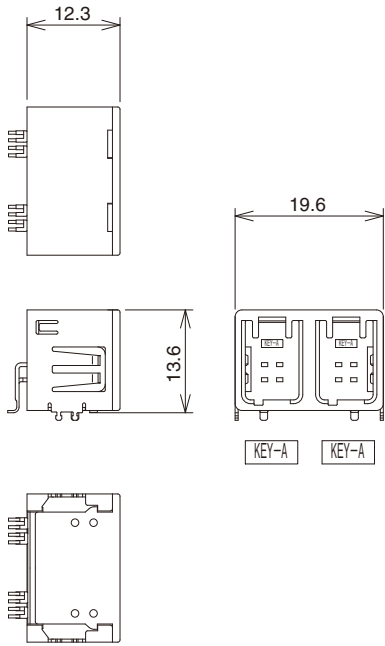

| Part No.            | HRS No.       | Color | Material / Plating                                                                          | Packaging | RoHS |
|---------------------|---------------|-------|---------------------------------------------------------------------------------------------|-----------|------|
| GT17HN-4/4DP-2H(AA) | 767-0246-6 00 | Brown | Housing:PPS<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 1         | YES  |

## ■ 16 Pos. Straight Connectors

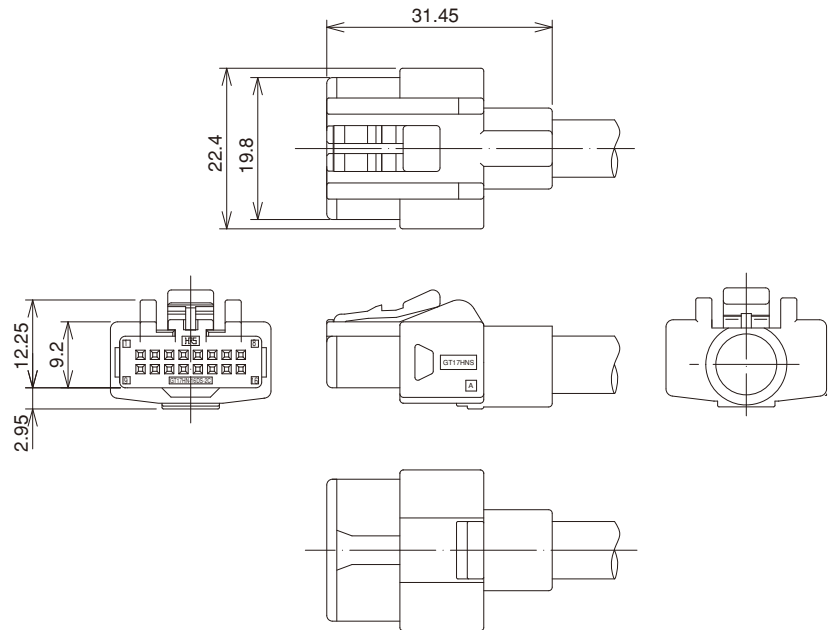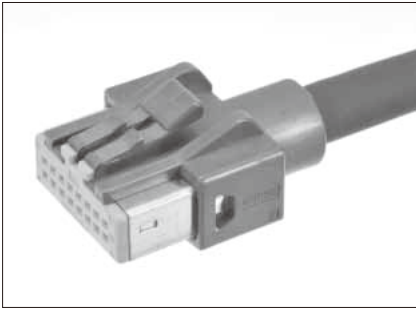

### ◆ The product comprises 4 parts.

(Housing, insulator, outer terminal, and center terminal)

#### ● Housing

| Part No.        | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|-----------------|------------|-----------------------------|-----------|------|
| GT17HNS-16DS-HU | 767-0164-3 | PBT / Dark Gray             | 1         | YES  |

#### ● Insulator

| Part No.       | HRS No.    | Material / Plating or Color | Packaging | RoHS |
|----------------|------------|-----------------------------|-----------|------|
| GT17HN-16DS-2C | 767-0162-8 | PBT / Light Gray            | 1         | YES  |

#### ● Outer terminal

| Part No.         | HRS No.    | Material / Plating or Color | Outer Diameter | Packaging | RoHS |
|------------------|------------|-----------------------------|----------------|-----------|------|
| GT17HNS-16DS-8CF | 767-0165-6 | Copper alloy / Tin plating  | φ7.8 to 8.2    | 1         | YES  |

#### ● Center terminal

| Part No.        | HRS No.       | Material / Plating or Color   | Conductor Size(AWG) | Outer Diameter | Packaging       | RoHS |
|-----------------|---------------|-------------------------------|---------------------|----------------|-----------------|------|
| GT8-2428SCF(70) | 758-0001-8 70 | Phosphor Bronze / Tin plating | 24 to 28 AWG        | φ0.8 to 1.5    | 10,000 pcs/reel | YES  |

### ◆ Mating Table

| Color | Cable side connector | Board connector                      |
|-------|----------------------|--------------------------------------|
| Gray  | GT17HNS-16DS-HU      | GT17HN-16DP-2H<br>GT17HN-16DP-2H(10) |

GT5

GT13

GT16

PO5G

GT19

GT21

GT26

GT36

GT11

GT17

GT32

GT3

GT7

GT10

GT18W

GT25

GT8E

GT9


GT15

16 Pos. SMT Connectors

● With M2.6 screw flange



GT17HN-16DP-2H

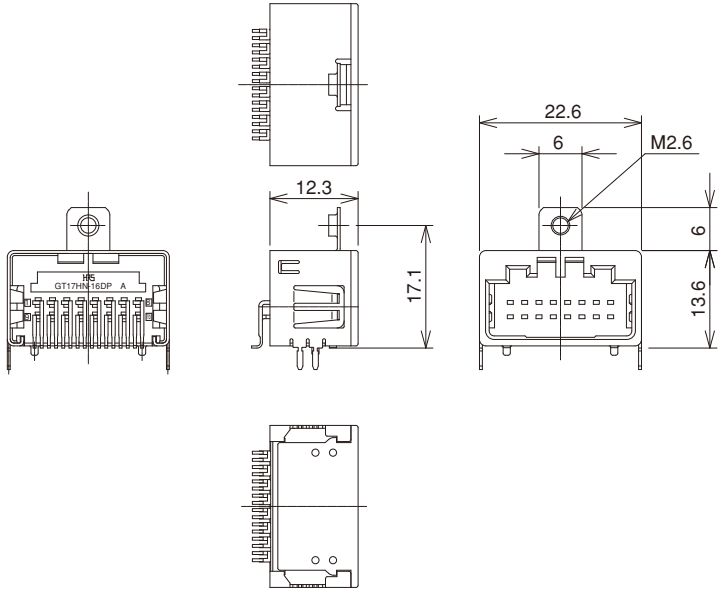


| Part No.       | HRS No.    | Color      | Material / Plating                                                                          | Packaging | RoHS |
|----------------|------------|------------|---------------------------------------------------------------------------------------------|-----------|------|
| GT17HN-16DP-2H | 767-0153-7 | Light Gray | Housing:PPS<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 1         | YES  |

● Without flange



GT17HN-16DP-2H(10)

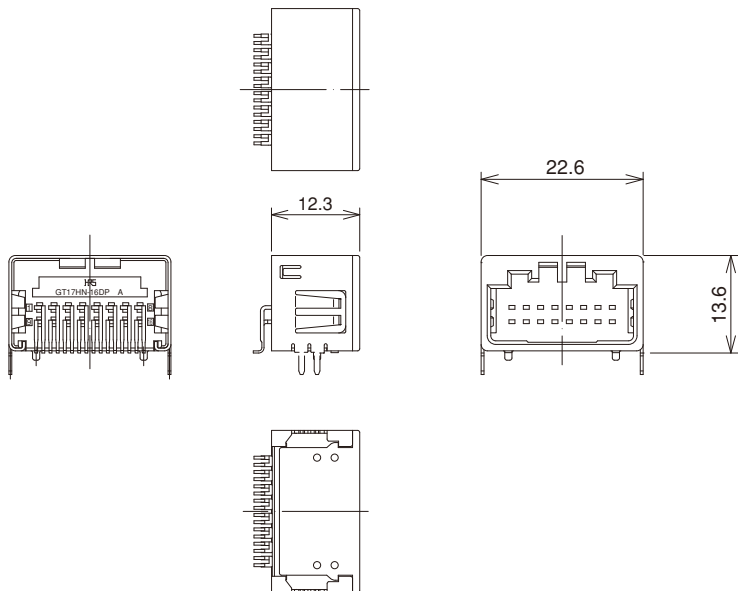


| Part No.           | HRS No.       | Color      | Material / Plating                                                                          | Packaging    | RoHS |
|--------------------|---------------|------------|---------------------------------------------------------------------------------------------|--------------|------|
| GT17HN-16DP-2H(10) | 767-0153-7 10 | Light Gray | Housing:PPS<br>Center terminal:Brass/Tin plating<br>Outer terminal:Copper alloy/Tin plating | 200 pcs/reel | YES  |

## ◆Crimping tools

User manuals are available. Please ask your Hirose Electric account representative.

### ● Automatic Crimping Machine

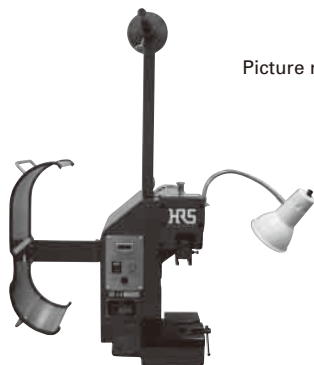

Picture reference only

Part No. CM-105C

#### Specifications

| Item              | Specification              | Remarks       |
|-------------------|----------------------------|---------------|
| Press capacity    | 1.5Ton                     |               |
| Stroke            | 30mm                       |               |
| Number of strokes | 200spm (50Hz)              | 240spm (60Hz) |
| Weight            | 75kg                       |               |
| Motor             | 0.2kW                      | AC100V        |
| Crimping speed    | 2000 to 4000 pcs. per hour |               |

#### Applicator

| Terminal Product No. | Terminal HRS No. | Tool No.         | Tool HRS No. |
|----------------------|------------------|------------------|--------------|
| GT17-2022SCF         | 767-0009-0       | AP105-GT17-2022S | 901-5083-5   |
| GT17-2428SCF         | 767-0010-0       | AP105-GT17-2428S | 901-5084-8   |
| GT17-30SCF           | 767-0064-9       | AP105-GT17-30S   | 901-5107-1   |
| GT17-2022PCF         | 767-0082-0       | AP105-GT17-2022P | 901-5146-3   |
| GT17-2428PCF         | 767-0076-8       | AP105-GT17-2428P | 901-5177-7   |
| GT8-2428SCF(70)      | 758-0001-8 70    | AP105-GT8-2428S  | 901-5174-9   |
| GT8E-2428PCF         | 758-0067-6       | AP105-GT8E-2428P | 901-5192-0   |

Note1 : Crimp heights may differ depending on the cable specification, so please consult a HRS representative for assistance.

Note2 : Before purchasing Hirose tooling, please make sure that your selected cable will work with the Hirose applicator.

Note3 : Cables that are different from those specified by Hirose may not be suitable and may require modification to the applicator to obtain a proper crimp.

#### Contact insert tool for GT17H-4S-2C

| Product No.     | HRS No.       | Tool No.      | Tool HRS No. |
|-----------------|---------------|---------------|--------------|
| GT8-2428SCF(70) | 758-0001-8 70 | GT17-4S/PR-MD | 902-5109-3   |

\* This tool was designed when GT8-2428SCF(70) insert to GT17H-4S-2C.

Please do not use other contact and housing.

## ● HANDPRESS

## Hand Press



Part No.HOS-7

## Crimp tool for outer shield(Module for HOS-7)

| Product No.       | HRS No.    | Crimp tool for outer shield Product No. | Crimp tool for outer shield HRS No. |
|-------------------|------------|-----------------------------------------|-------------------------------------|
| GT17V-6DS-5CF     | 767-0027-2 | GT17VS-6DS-5/CR-MP                      | 902-5099-1                          |
|                   |            | GT17VS-6DS-5/CR-MP(01)                  | 902-5099-1 01                       |
|                   |            | GT17VS-6DS-CH48/CR-MP                   | 902-5105-2                          |
|                   |            | GT17VS-6DS-CH48/CR-MP(01)               | 902-5105-2 01                       |
| GT17VS-6DS-5CF    | 767-0050-4 | GT17VS-6DS-5/CR-MP                      | 902-5099-1                          |
|                   |            | GT17VS-6DS-5/CR-MP(01)                  | 902-5099-1 01                       |
| GT17V-6DS-3.8CF   | 767-0075-5 | GT17V-6DS-3.8/CR-MP                     | 902-5101-1                          |
|                   |            | GT17V-6DS-3.8/CR-MP(01)                 | 902-5101-1 01                       |
| GT17VS-6DP-5CF    | 767-0080-5 | GT17VS-6DP-5/CR-MP                      | 902-5088-5                          |
|                   |            | GT17VS-6DP-5/CR-MP(01)                  | 902-5088-5 01                       |
| GT17S-8DS-7CF     | 767-0106-7 | GT17S-8DS-7/CR-MP                       | 902-5090-7                          |
|                   |            | GT17S-8DS-7/CR-MP(01)                   | 902-5090-7 01                       |
| GT17V-10DS-8CF    | 767-0037-6 | GT17V-10DS/CR-MP                        | 902-5057-1                          |
|                   |            | GT17V-10DS/CR-MP(01)                    | 902-5057-1 01                       |
| GT17VS-10DS-8CF   | 767-0059-9 | GT17V-10DS/CR-MP                        | 902-5057-1                          |
|                   |            | GT17V-10DS/CR-MP(01)                    | 902-5057-1 01                       |
| GT17VS-10DP-5.2CF | 767-0114-5 | GT17VS-10DP-5.2/CR-MP                   | 902-5084-4                          |
|                   |            | GT17VS-10DP-5.2/CR-MP(01)               | 902-5084-4 01                       |
| GT17VS-10DS-4.6CF | 767-0116-0 | GT17VS-10DS-4.6/CR-MP                   | 902-5083-1                          |
|                   |            | GT17VS-10DS-4.6/CR-MP(01)               | 902-5083-1 01                       |
| GT17H-4S-5CF      | 767-0087-4 | GT17H-4S-5CF/CR-MP                      | 902-5100-9                          |
|                   |            | GT17H-4S-5CF/CR-MP(01)                  | 902-5100-9 01                       |
| GT17HS-4S-5CF     | 767-0135-5 | GT17H-4S-5CF/CR-MP                      | 902-5100-9                          |
|                   |            | GT17H-4S-5CF/CR-MP(01)                  | 902-5100-9 01                       |
| GT17HS-4P-5CF     | 767-0156-5 | GT17HS-4P-5CF/CR-MP                     | 902-5108-0                          |
|                   |            | GT17HS-4P-5CF/CR-MP(01)                 | 902-5108-0 01                       |
| GT17HN-4DS-5CF    | 767-0142-0 | GT17HNS-4DS-5/CR-MP                     | 902-5103-7                          |
|                   |            | GT17HNS-4DS-5/CR-MP(01)                 | 902-5103-7 01                       |
| GT17HNS-4DS-5CF   | 767-0151-1 | GT17HNS-4DS-5/CR-MP                     | 902-5103-7                          |
|                   |            | GT17HNS-4DS-5/CR-MP(01)                 | 902-5103-7 01                       |
| GT17HNS-16DS-8CF  | 767-0165-6 | GT17HNS-16DS-8/CR-MP                    | 902-5102-4                          |
|                   |            | GT17HNS-16DS-8/CR-MP(01)                | 902-5102-4 01                       |

Note1 : (01)is set unit (HOS-7 and Crimp tool).

Note2 : Crimp height sets for each cable. Please ask HRS sales in detail. Take time to define new crimp height.

Note3 : Please ask Crimp height for your cable when you use HRS tool.

Note4 : Applicable tool may be changed by specic cable.