

PLUGGABLE Panel Mount

For wire-to-wire connections in HVAC, appliance, equipment, power and other distribution applications. Pluggable Eurostrips® speed and simplify replacement of subassemblies, etc. They reduce downtime and misconnections.

Two-piece pluggable terminal strips feature tubular screw clamps, with recessed metal parts for finger protection. A spring loaded contact prevents inadvertent unplugging.



The headers and plugs are available with flat base or standoff feet and can be panel mounted or free float. Offered in easy-to cut 12-pole strips, they can also be orderd precut with the required number of poles.

- Tubular Screw Clamp
- Panel Mount or Free Float
- Housing material:
 - Polyamide 66/6
 - V-O flammability
- Color: Opaque White

FLAT BASE

Pole Spacing
Mounting Hole Diameter
Stripping Length
Approvals
Wire Range
Voltage Rating
Current Rating
Torque
Other Approvals

No. of Poles
2
3
4
5
6
7
8
9
10
11
12




10 mm	3.5 mm	3.6 mm	
2.5-4mm ²	24-10AWG	400V	300V
10A	20A	0.8Nm	7.2lb



10 mm	3.5 mm	3.6 mm	
2.5-4mm ²	24-10AWG	400V	300V
10A	20A	0.8Nm	7.2lb

Cat. No.	Std. Pk.
HE42ST/02	100
HE42ST/03	100
HE42ST/04	100
HE42ST/05	100
HE42ST/06	50
HE42ST/07	50
HE42ST/08	50
HE42ST/09	50
HE42ST/10	50
HE42ST/11	50
HE42ST/12	50

Cat. No.	Std. Pk.
HE42BU/02	100
HE42BU/03	100
HE42BU/04	100
HE42BU/05	100
HE42BU/06	50
HE42BU/07	50
HE42BU/08	50
HE42BU/09	50
HE42BU/10	50
HE42BU/11	50
HE42BU/12	50

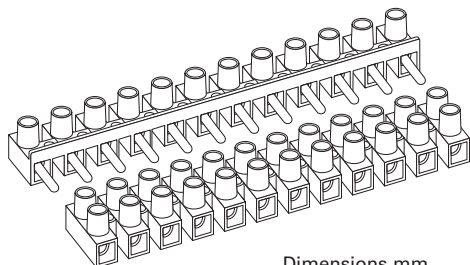


Dimensions mm	
A = 10.0	J = 15.2
B = M3	K = 7.9
C = 6.4	L = 117
D = 3.6	M = 14.9
E = Ø3.5	N = 34.4
F = Ø5.7	O = 9.2
G = 10.0	P = 20
H = Ø3.5	Q = 14.4
I = 3.2	R = 7

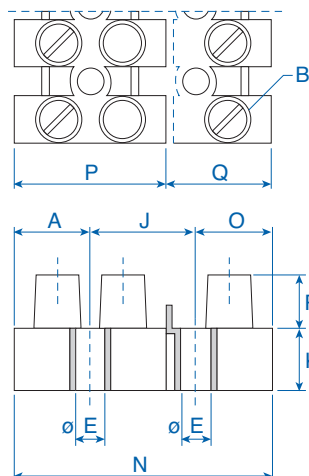


STANDOFF FEET

HE42SST

HE42SBU



Pole Spacing	10 mm		10 mm	
Mounting Hole Diameter	3.5 mm		3.5 mm	
Stripping Length	3.6 mm		3.6 mm	
Approvals	 		 	
Wire Range	2.5-4mm ² 24-10AWG		2.5-4mm ² 24-10AWG	
Voltage Rating	400V 600V		400V 600V	
Current Rating	10A 20A		10A 20A	
Torque	0.8Nm 7.2lb		0.8Nm 7.2lb	
Other Approvals	 		 	
No. of Poles	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.
2	HE42SST/02	100	HE42SBU/02	100
3	HE42SST/03	100	HE42SBU/03	100
4	HE42SST/04	100	HE42SBU/04	100
5	HE42SST/05	100	HE42SBU/05	100
6	HE42SST/06	50	HE42SBU/06	50
7	HE42SST/07	50	HE42SBU/07	50
8	HE42SST/08	50	HE42SBU/08	50
9	HE42SST/09	50	HE42SBU/09	50
10	HE42SST/10	50	HE42SBU/10	50
11	HE42SST/11	50	HE42SBU/11	50
12	HE42SST/12	50	HE42SBU/12	50

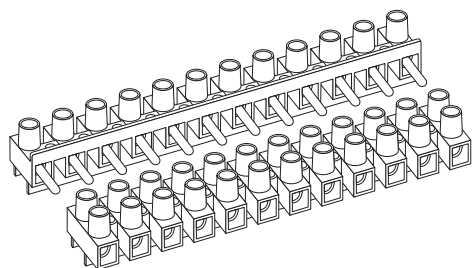

Dimensions mm

A = 10.0	J = 15.2
B = M3	K = 11.5
C = 6.4	L = 117
D = 3.6	M = 18.5
E = Ø3.5	N = 34.4
F = Ø5.7	O = 9.2
G = 10.0	P = 20
H = Ø3.5	Q = 14.4
I = 6.8	R = 7

