



HIGH EFFICIENCY RECTIFIER

HER301 THRU HER308

VOLTAGE RANGE
CURRENT

50 to 800 Volts
3.0Ampere


DO-27

FEATURES

- Low coat construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 secods/.375"(9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.042ounce, 1.19 grams

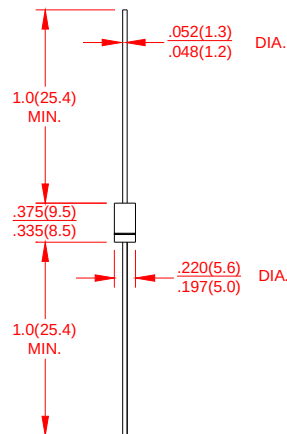

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	HER 301	HER 302	HER 303	HER 304	HER 305	HER 306	HER 307	HER 308	UNITS
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	50	100	200	300	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	210	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	300	400	600	800	1000	Volts
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at T _A = 50℃		I _(AV)	3.0								Amp
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)		I _{FSM}	125								Amps
Maximum Instantaneous Forward Voltage @ 3.0A		V _F	1.0			1.3		1.5	1.7		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _A = 25℃	I _R	10								μA
	T _A = 125℃		500								
Maximum Full Load Recovery Current,full cycle average 0.375”(9.5mm)lead length at T _L =55℃		IR _(AV)	150								μA
Maximum Reverse Recovery Time(NOTE 1)		t _{rr}	50					75			ns
Typical Thermal Resistance (NOTE 2)		C _J	70					50			PF
Typical Thermal Resistance(NOTE 3)		R _{θJA}	20								℃/W
Operating Junction Temperature Range		T _J ,T _{STG}	(-55 to +150)								℃

Notes:

- 1 Test Condition: $I_F=0.5A, I_R=1.0A, I_{RR}=0.25A$
2. Measured at 1.0 MHz and applied reverse of 4.0 V
- 3 Thermal resistance from junction to ambient with .375"(9.5mm)lead length, P.C.B. mounted. .



HIGH EFFICIENCY RECTIFIER

HER301 THRU HER308

VOLTAGE RANGE
CURRENT

50 to 800 Volts
3.0Ampere

RATING AND CHARACTERISTIC CURVES HER301 THRU HER308

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

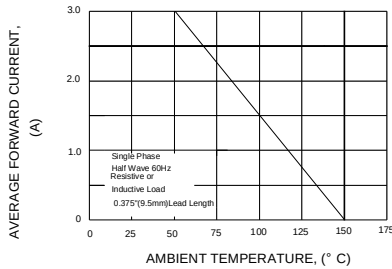


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

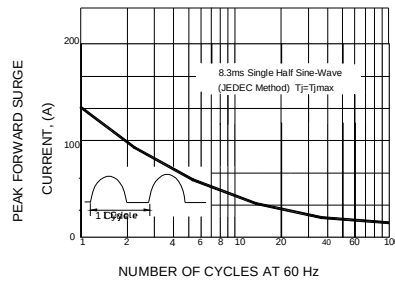


FIG.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

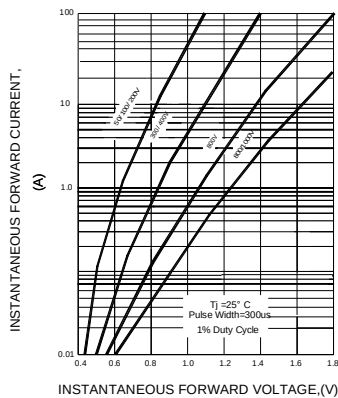


FIG.4-TYPICAL REVERSE
CHARACTERISTICS

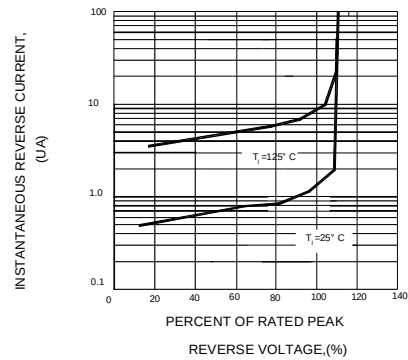


FIG.5-TYPICAL JUNCTION CAPACITANCE

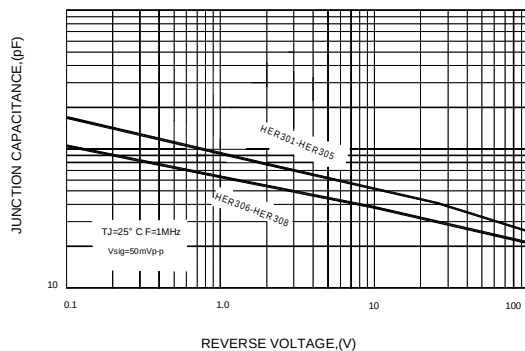


FIG.6-TEST CIRCUIT DIAGRAM AND
REVERSE RECOVERY TIME CHARACTERISTIC

