





(2,54mm) .100"

TSS, TST, HTSS, HTST, ZSS, ZST SERIES

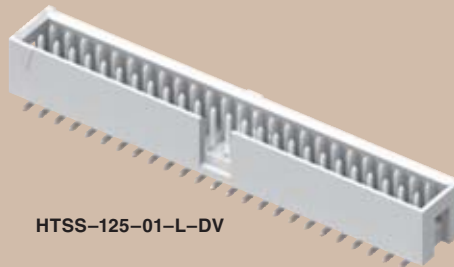

HTSS-125-01-L-DV

ZSS-113-03-L-D-0735



SHROUDED .025" SQ POST HEADERS

TSS, HTSS, ZSS

Mates with:
SSW, SSQ, ESW, ESQ,
SSM, BCS, SMSD

TST, HTST, ZST

Mates with:
IDSD, SMSD

SPECIFICATIONS

For complete specifications see www.samtec.com?TSS, www.samtec.com?TST, www.samtec.com?HTSS, www.samtec.com?HTST, www.samtec.com?ZSS or www.samtec.com?ZST

Insulator Material:

Black Glass
Filled Polyester
(TSS, TST, ZSS, ZST)
Natural PCT (HTSS, HTST)

Insulation Resistance:

5000 MΩ min

Terminal Material:

Phosphor Bronze

Plating:

Au or Sn over

50μ" (1,27μm) Ni

Current Rating:

3A

Operating Temp Range:

-55°C to +125°C with Gold

-55°C to +105°C with Tin

Flammability Rating:

UL 94V-O

Withstanding Voltage:

1000 VRMS

RoHS Compliant:

Yes

Processing:

Lead-Free Solderable:

Yes (HTSS, HTST)

Wave Only (TSS, TST,

ZSS, ZST)

SMT Lead Coplanarity:

(0,15mm) .006"



APPLICATION SPECIFIC OPTION

- Alignment Pins
- Single Row
- Locking Leads
- Polarized
- Call Samtec.

Note: Other Gold plating options available. Contact Samtec.

Note: Some lengths, styles and options are non-standard, non-returnable. ZSS, ZST are non-standard, non-returnable.

TYPE STRIP	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	BODY HEIGHT
------------	---	------------------	------------	----------------	------------	-------------

TSS

= Top Shrouded Connector Strip

TST

= Top Shrouded Cable Strip

HTSS

= High Temp Top Shrouded Connector Strip

HTST

= High Temp Top Shrouded Cable Strip

ZSS



= Elevated Connector Strip

ZST

= Elevated Cable Strip

Specify "LEAD STYLE" from chart


LEAD STYLE	STRAIGHT TAIL LENGTH (A)
-01	(2,92) .115
-02	(4,19) .165
-03	(14,35) .565



LEAD STYLE	ZSS/ZST OVERALL LENGTH (C)
-01	(16,00) .630
-02	(18,54) .730
-03	(21,08) .830
-04	(23,62) .930
-05	(26,16) 1.030
-06	(28,70) 1.130
-07	(31,24) 1.230
-08	(33,78) 1.330
-09	(36,32) 1.430

LEAD STYLE	TSS/TST/HTSS/HTST RIGHT ANGLE TAIL LENGTH (B)
-04	(3,30) .130
-05	(5,84) .230

HTSS/HTST Lead Style -01



-D

= Double Row Through-hole (lead style -01, -02 & -03 only or BODY HEIGHT must be specified)

-DV

= Double Row Surface Mount (lead style -01 only) (HTSS, HTST only)

-D-RA

= Double Row Right Angle (lead style -04 & -05 only) (ZSS, ZST not available)

- "XXXX"

= Body Height (ZSS, ZST & -D only)


LEAD STYLE	MAX. BODY HEIGHT
-01	.540 (13,72)
-02	.640 (16,26)
-03	.740 (18,80)
-04	.840 (21,34)
-05	.940 (23,88)
-06	1.040 (26,42)
-07	1.140 (28,96)
-08	1.240 (31,50)
-09	1.340 (34,04)

For board stacking height add .085" (2,16mm) when mated with SSW series.

Example: ZST-1XX-01-X-X-465 mated with SSW = (13,97mm) .550" board space

05, 07, 08, 10, 12, 13, 15, 17, 20, 25, 32, 36

(Call Samtec for other sizes.)

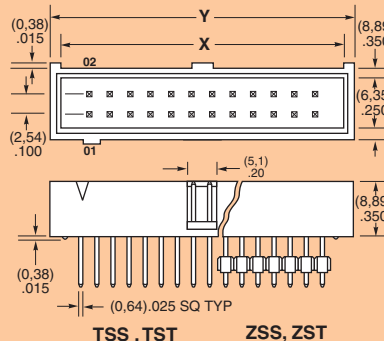

TSS, TST

ZSS, ZST

TYPE STRIP	X	Y
HTSS	(2,54) .100	(2,54) .100
TSS	X No. of Positions + (1,27) .050	X No. of Positions + (3,81) .150
ZSS		
HTST	(2,54) .100	(2,54) .100
TST	X No. of Positions + (5,08) .200	X No. of Positions + (7,62) .300
ZST		

Specify -SS for cost-effective heavy Gold where it counts!

-F = Gold flash on post, Matte Tin on tail

-L = 10μ" (0,25μm) Gold on post, Matte Tin on tail

-G = 10μ" (0,25μm) Gold on post, Gold flash on balance (not available on -DV)

-T = Matte Tin

-SS = 30μ" (0,76μm) Gold stripe on contact area, Gold flash to tip, Matte Tin on tail (TSS & HTSS only) (Straight -01, -02, -03, Right Angle -04 & Surface Mount -01 only)

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683