

SUMMARY

Wires

Low	19
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Download

[Request a quote](#)[Catalog](#)

Series	2W
Termination type	Female solder
IP rating	68
Cable Ø	0.00 - 0.00 mm
Matching parts	FVG.2W.319.CLAC60

TECHNICAL DETAILS

Mechanics

Shell Style/Model	HV*: Fixed socket, nut fixing, vacuumtight
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	Ø 0 - 0 mm
Variant	P : Watertight

Performance

Configuration	
Insulator	
Rated Current	5 Amps

Specifications


Contact Type: Solder
Max. Matings: 5000
Contact Dia.: 0.7 mm (0.028in)
Bucket Dia.: 0.8 mm (0.031in)
Max. Solid Conductor: 0.34 mm ² (AWG 22)
Max. Stranded Conductor: 0.34 mm ² (AWG 22)
R (max): 6.1 mOhm
Vtest (contact-contact): 950 V (AC) 1300 V (DC)
Vtest (contact-shell): 1250 V (AC) 1800 V (DC)

Others

Pressure: 40 bars
IP Rating: 68

DRAWINGS

Draws

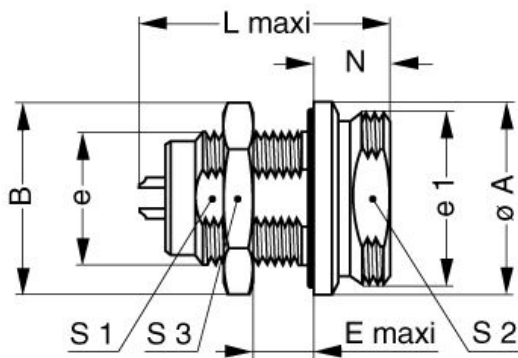

Dimensions

	A	B	E	L	N	S1	S2	S3	e	e1
mm.	22.5	21.8	12	30.7	9	14.5	18.5	19	M16x1.0	M20x1.0
in.	0,89	0,86	0,47	1,21	0,35	0,57	0,73	0,75		

RECOMMENDED BY LEMO

Tools

None

Cables

CMN.19.T22.079QGZE	TPR (medical)	Grey	
CMN.19.T22.080PGCE	PVC	GREY	
CMN.19.T22.080PGZE		Grey	
CMN.19.T22.080PNCE	PVC	Black	
CMN.19.T22.080PNZE			