







Precision modular connectors to suit your application

Since its creation in Switzerland in 1946 the LEMO Group has been recognized as a global leader of circular Push-Pull connectors and connector solutions. Today LEMO and its affiliated companies, REDEL and COELVER, are active in more than 80 countries with the help of over 40 subsidiaries and distributors.


Over 75'000 connectors

The modular design of the LEMO range provides over 75'000 connectors from miniature ø 3 mm to ø 50 mm, capable of handling cable diameters up to 30 mm and for up to 114 contacts.

This vast portfolio enables you to select the ideal connector configuration to suit almost any specific requirement in most markets, including medical devices, test and measurement instruments, machinery, audio video broadcast, telecommunications and military.

LEMO's Push-Pull Self-Latching Connection System (not shown in this catalogue)

This self-latching system is renowned worldwide for its easy and quick mating and unmating features. It provides absolute security against vibration, shock or pull on the cable, and facilitates operation in a very limited space.

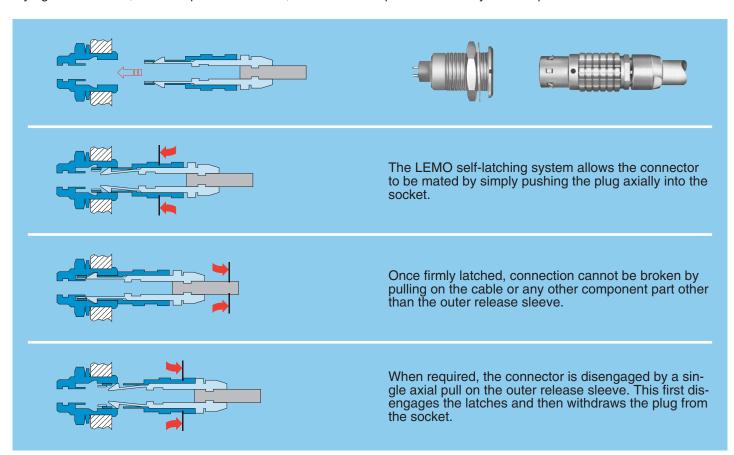

UL Recognition 🔊

LEMO connectors are recognized by the Underwriters Laboratories (UL). The approval of the complete system (LEMO connector, cable and your equipment) will be easier because LEMO connectors are recognized.

CE marking C€

CE marking (means that the appliance or equipment bearing it complies with the protection requirements of one or several European safety directives. CE marking (applies to complete products or equipment, but not to electromechanical components, such as connectors.

RoHS

LEMO connector specifications conforms the requirements of the RoHS directive (2011/65/EU) of the European Parliament and the latest amendments. This directive specifies the restrictions of the use of hazardous substances in electrical and electronic equipment marketed in Europe.





03 Series


This series of connectors stems from the series 00 and has been specifically developed for applications where the connection must be guaranteed under very high pressure. The push-pull latching system has been replaced by a screw coupling system with watertightness maintained by compression of an O-ring in FPM (Viton®) according to the triangular shaped cavity principle. There are multiple application possibilities, from aerospace to the petroleum industry.


After cable assembly, the rear part must be covered with an adhesive heatshrink boot in order to ensure watertightness on the cable side. 03 series connectors provide the following main features:

- coaxial 50 Ω type
- multipole with 2, 3 or 4 contacts 360° screening for full EMC shielding
- rugged housing for extreme working conditionsworking pressure that can exceed 60 bars in mated conditions

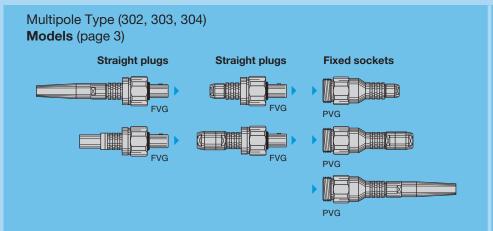




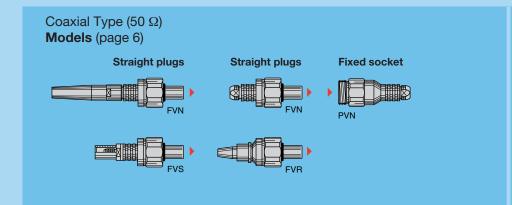





Part Numbering System

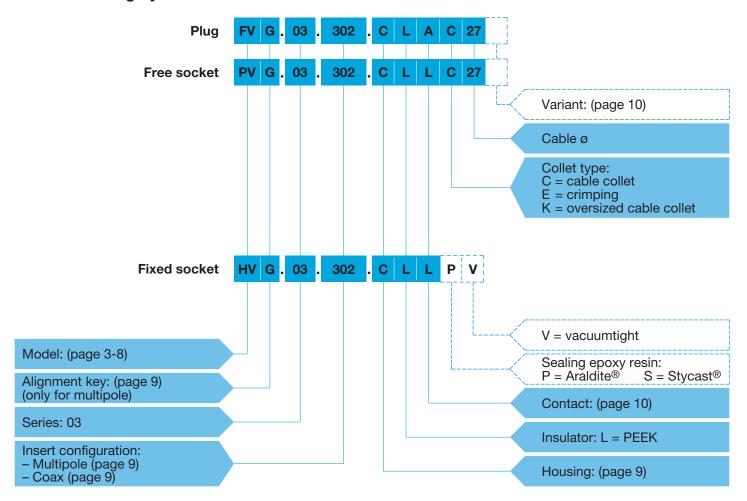

Part Number Example

Straight plug with cable collet:

FVG. 03.302.CLAC27 = straight plug with key (G) and cable collet, 03 series, multipole type with 2 contacts, outer shell in chrome-plated brass, PEEK insulator, male solder contacts, C type collet for 2.7 mm diameter cable.


Free socket:

PVG.03.302.CLLC27 = free socket with key (G) and cable collet, 03 series, multipole type with 2 contacts, outer shell in chrome-plated brass, PEEK insulator, female solder contacts, C type collet for 2.7 mm diameter cable.

Fixed socket:

HVG.03.302.CLLPV = fixed socket, nut fixing, with key (G), 03 series, multipole type with 2 contacts, outer shell in chrome-plated brass, PEEK insulator, female solder contacts, sealed with Araldite® epoxy resin.

Part Section Showing Internal Components (multipole)

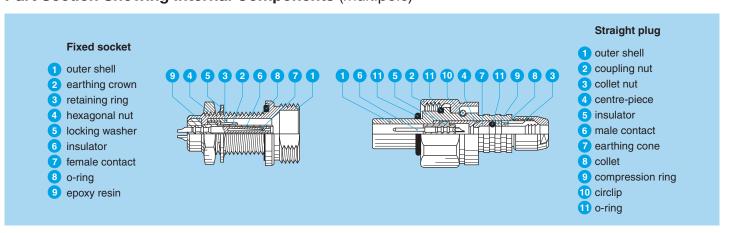





Models (multipole type)

Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard	
Endurance	> 1000 cycles	IEC 60512-5 test 9a	
Humidity	up to 95% at 60° C		
Temperature range	-20° C, +200° C		
Salt spray corrosion test	> 144 h	IEC 60512-6 test 11f	
Protection index ²⁾	> IP68	IEC 60529	
Resistance to hydrostatic pressure ²⁾	~ 60 bars ¹⁾	IEC 60512-7 test 14d	
Climatical category	20/200/21	IEC 60068-1	

Note:


Electrical

Characteristics		Value	Standard	Section	
Insulation resistanc	e (ı	new)	$> 10^{12} \Omega$	IEC 60512-2	test 3a
Insulation resistance 3)		$> 10^{10} \Omega$	IEC 60512-2	test 3a	
Shell electrical cont	inu	iity	$5.0~\text{m}\Omega$	IEC 60512-2	test 2f
Shielding efficiency	,	at 10 MHz	> 100 dB	IEC 60169-1-3	
Shielding emcleric	y	at 1 GHz	> 80 dB	IEC 60169-1-3	
Contact resist. 4)	Ø	A = 0.5 mm	≤ 8.7 mΩ	IEC 60512-2	test 2a
Contact resist. 4)	Ø	A = 0.7 mm	≤ 6.1 mΩ	IEC 60512-2	test 2a

Note

3) after humidity test: 21 days at 95% RH according to IEC 60068-2.


⁴⁾ after 5000 mating cycles and the salt spray test according to IEC 60512-6 test 11 f.

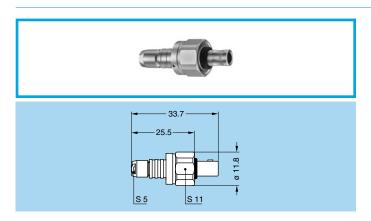

FVG Straight plug, key (G) or key (B), cable collet

Part number	Cable ø (mm)	
Part number	min.	max.
FVG.03.30•.CLAC27	2.4	2.6
FVG.03.30•.SLAC27	2.4	2.6
FVG.03.30 • . CLAC31	2.7	3.0
FVG.03.30 • . SLAC31	2.7	3.0

Note: • = insert configuration (page 9)



FVG Straight plug, key (G) or key (B), cable collet and nut for fitting a bend relief

Part number	Cable ø (mm)	
Part number	min.	max.
FVG.03.30•.CLAC27Z	2.4	2.6
FVG.03.30•.SLAC27Z	2.4	2.6
FVG.03.30•.CLAC31Z	2.7	3.0
FVG.03.30•.SLAC31Z	2.7	3.0

Note: ● = insert configuration (page 9). The bend relief must be ordered separately (page 10)

38.7 30.5 \$7 \$7 \$11

FVG Straight plug, key (G) or key (B) and oversize cable collet

Part number	Cable ø (mm)	
Part number	min.	max.
FVG.03.30 • . CLAK35	3.1	3.5
FVG.03.30•.CLAK40	3.6	4.0
FVG.03.30•.CLAK45	4.1	4.5
FVG.03.30•.CLAK50	4.6	5.0


Note: ● = insert configuration (page 9) Correspond to K type of collet. Also available with nut for fitting a bend relief.

3

¹⁾ in order to perform correctly and withstand the pressure, cable assembly shall be made according to instruction we recommand. See page 11.

²⁾ For mated plug and socket.




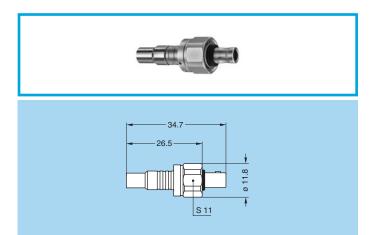

FVG Straight plug, key (G) for cable crimping

Part number	Cable ø (mm)
Part number	max.
FVG.03.30 • . CLAE44	4.3
FVG.03.30•.SLAE44	4.3
FVG.03.30•.CLAE52	5.1
FVG.03.30•.SLAE52	5.1


Note: • = insert configuration (page 9)

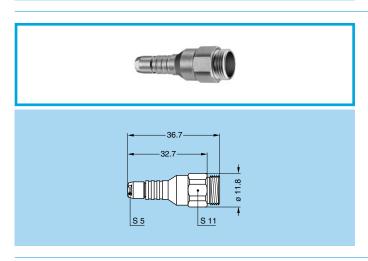

PVG Free socket, key (G) and cable collet

Part number	Cable ø (mm)	
Part number	min.	max.
PVG.03.30•.CLLC27	2.4	2.6
PVG.03.30 • . CLLC31	2.7	3.0


Note: • = insert configuration (page 9)



PVG Free socket, key (G), cable collet and nut for fitting a bend relief

Part number	Cable ø (mm)		
Part number	min.	max.	
PVG.03.30•.CLLC27Z	2.4	2.6	
PVG.03.30•.CLLC31Z	2.7	3.0	

Note: ● = insert configuration (page 9).
The bend relief must be ordered separately (page 10)

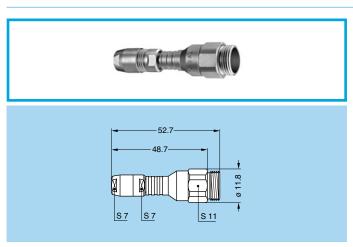

PVG Free socket, key (G) and oversize cable collet

Part number	Cable ø (mm)		
Part number	min.	max.	
PVG.03.30•.CLLK35	3.1	3.5	
PVG.03.30 • . CLLK40	3.6	4.0	
PVG.03.30•.CLLK45	4.1	4.5	
PVG.03.30•.CLLK50	4.6	5.0	

Note: ● = insert configuration (page 9) Correspond to K type of collet. Also available with nut for fitting a bend relief.





Vacuumtight models (multipole type)

These sockets models allow the device on which they are fitted to reach a protection index of IP68 as per IEC 60529. They are fully compatible with plugs of the same series and are widely used for portable radios, military, laboratory equipment, aviation, etc.

These models are identified by a letter «P» or «S» at the last but one character of the reference. The Stycast® sealant can be used over a larger temperature range than the Araldite® sealant.

Vaccumtight models are identified by an additional letter «V» at the end of the part number (certificate on request). Epoxy resin is used to seal these models.

Technical Characteristics


Mechanical and Climatical

Characteristics	Value	Standard	
Endurance	> 1000 cycles	IEC 60512-5 test 9a	
Humidity	up to 95% at 60° C		
Temperature range	-20° C, +100° C		
Salt spray corrosion test	> 144h	IEC 60512-6 test 11f	

Characteristics	Value	Standard
Climatical category	20/80/21	IEC 60068-1
Leakage rate (He) 1)	< 10 ⁻⁷ mbar.l.s ⁻¹	IEC 60512-7 test 14b
Max. operating pressure ²⁾	60 bars	IEC 60512-7 test 14d

Note: $^{1)}$ only for vacuumtight models. $^{2)}$ this value corresponds to the maximum allowed pressure difference for the assembled socket.






HVG Fixed socket, key (G) or key (B), round flange, nut fixing, vacuumtight

Part number	Sealing resin
HVG.03.30•.CLLPV	Araldite [®]
HVG.03.30•.SLLPV	Araldite®
HVG.03.30•.CLLSV	Stycast®
HVG.03.30•.SLLSV	Stycast®

Panel cut-out (page 11)

Note: • = insert configuration (page 9)






HWG Fixed socket, key (G), hexagonal flange, nut fixing, vacuumtight

Part number	Sealing resin
HWG.03.30•.CLLPV	Araldite [®]
HWG.03.30 • . CLLSV	Stycast®

Panel cut-out (page 11)

Note: • = insert configuration (page 9)





HRG Fixed socket, key (G), hexagonal flange, nut fixing, no flats on fixing thread, vacuumtight


Part number	Sealing resin
HRG.03.30•.CLLPV	Araldite [®]
HRG.03.30•.SLLPV	Araldite [®]
HRG.03.30 • .CLLSV	Stycast®
HRG.03.30 . SLLSV	Stycast®

Panel cut-out (page 11)

Note: • = insert configuration (page 9)







Part number	Sealing resin
HTG.03.30 • .CLLSV	Stycast®

Panel cut-out (page 11)

Note: • = insert configuration (page 9)





Models (coaxial type)

Technical Characteristics


Mechanical and Climatical

Characteristics	Value	Standard	
Endurance	> 1000 cycles	IEC 60512-5 test 9a	
Humidity	up to 95% at 60° C		
Temperature range	-20° C, +200° C		
Salt spray corrosion test	> 144 h	IEC 60512-6 test 11f	
Protection index 2)	> IP68	IEC 60529	
Resistance to hydrostatic pressure ²⁾	~ 60 bars ¹⁾	IEC 60512-7 test 14d	
Climatical category	20/200/21	IEC 60068-1	

Electrical

Characteristics		Value	Standard	Section	
Insulation resistance (new)		$> 10^{12} \Omega$	IEC 60512-2	test 3a	
Insulation resistance 3)		$> 10^{10} \Omega$	IEC 60512-2	test 3a	
Shell electrical continuity		$5.0~\text{m}\Omega$	IEC 60512-2	test 2f	
Objetalation of officions		at 10 MHz	> 100 dB	IEC 60169-1-3	
Shielding efficiency		at 1 GHz	> 80 dB	IEC 60169-1-3	
Contact resist. 4)	Ø	A = 0.5 mm	≤ 8.7 mΩ	IEC 60512-2	test 2a
Contact resist. 4)	ø A = 0.7 mm		≤ 6.1 mΩ	IEC 60512-2	test 2a
Max. working frequency		500 MHz	For coaxial type	e	


³⁾ after humidity test: 21 days at 95% RH according to IEC 60068-2.
4) after 5000 mating cycles and the salt spray test according to IEC 60512-6 test 11 f.

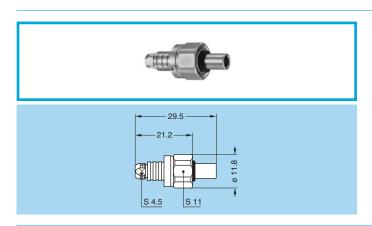

FVN Straight plug, cable collet

Part number	Cable group
FVN.03.250.CLAC27	4
FVN.03.250.SLAC27	4
FVN.03.250.CLAC31	3
FVN.03.250.SLAC31	3

Cable assembly (page 11)




Straight plug, cable collet and nut for fitting a bend relief

Part number	Cable group
FVN.03.250.CLAC27Z	4
FVN.03.250.SLAC27Z	4
FVN.03.250.CLAC31Z	3
FVN.03.250.SLAC31Z	3

Cable assembly (page 11)

Note: The bend relief must be ordered separately (page 10)




FVS Straight plug for cable crimping

Part number	Cable group
FVS.03.250.CLAE24	1
FVS.03.250.CLCE24	1
FVS.03.250.CLCE31	3-4

Cable assembly (page 11)

¹⁾ in order to perform correctly and withstand the pressure, cable assembly shall be made according to instruction we recommand. See page 11. ²⁾ For mated plug and socket.



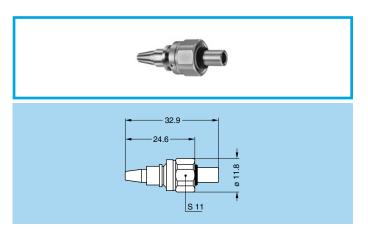


FVR Straight plug with brazing ferrule

Doub wounds on	Cable ø (mm)
Part number	max.
FVR.03.250.SLAV16B	1.55
FVR.03.250.SLAV20B	1.95

Cable assembly (page 11)

Note: The shell of the connector is in stainless steel AISI 316L.



PVN Free socket and cable collet

Part number	Cable group
PVN.03.250.CLLC27	4
PVN.03.250.CLLC31	3

Cable assembly (page 11)

Note: Also available with nut for fitting a bend relief (page 10).





Vacuumtight models (coaxial type)

These sockets models allow the device on which they are fitted to reach a protection index of IP68 as per IEC 60529. They are fully compatible with plugs of the same series and are widely used for portable radios, military, laboratoryequipment, aviation, etc.

These models are identified by a letter «P» or «S» at the last but one character of the reference. The Stycast® sealant can be used over a larger temperature range than the Araldite® sealant.

All these models are available in a watertight or vacuumtight version. Vaccumtight models are identified by an additional letter «V» at the end of the part number (certificate on request). Epoxy resin is used to seal these models.

Technical Characteristics


Mechanical and Climatical

Characteristics	Value	Standard	
Endurance	> 1000 cycles	IEC 60512-5 test 9a	
Humidity	up to 95% at 60° C		
Temperature range	-20° C, +100° C		
Salt spray corrosion test	> 144h	IEC 60512-6 test 11f	

Characteristics	Value	Standard
Climatical category	20/80/21	IEC 60068-1
Leakage rate (He) 1)	< 10 ⁻⁷ mbar.l.s ⁻¹	IEC 60512-7 test 14b
Max. operating pressure 2)	60 bars	IEC 60512-7 test 14d

Note: $^{1)}$ only for vacuumtight models. $^{2)}$ this value corresponds to the maximum allowed pressure difference for the assembled socket.






HVR Fixed socket, hexagonal flange, nut fixing, vacuumtight

Part number	Sealing resin
HVR.03.250.CLLPV	Araldite [®]
HVR.03.250.SLLPV	Araldite [®]
HVR.03.250.CLLSV	Stycast®
HVR.03.250.SLLSV	Stycast®

Panel cut-out (page 11)






HVP Fixed socket, round flange, nut fixing, vacuumtight

Part number	Sealing resin
HVP.03.250.CLLPV	Araldite [®]
HVP.03.250.CLLSV	Stycast®

Panel cut-out (page 11)






HVL Free socket, for device overmolding







HVW Free socket, for device overmolding, large shell



Note: Vacuumtightness is achieved after customer overmolding.



9



Alignment Key


Alignment Key and Polarized Keying System for Multipole Types

03 series connector model part numbers are composed of three letters. The LAST LETTER indicates the key position and the contact type (male or female).

Front view of a socket	Model	Nb of	səlbu	Series	Contac	ct type
	Mo	keys	Ang	03	Plug	Socket
	G	1		0°	male	female
	В	2	α	60°	male	female



Coaxial, multipole

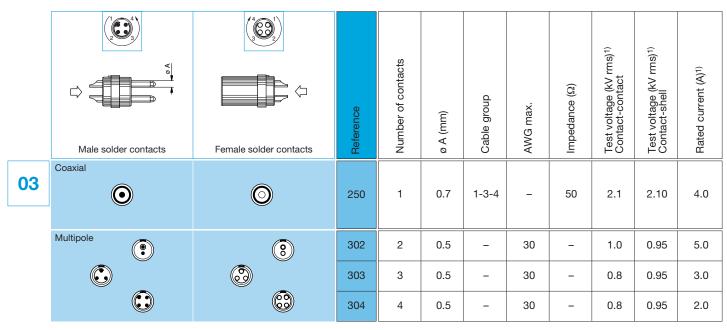

Note: 1) Test voltage measured according to IEC 60512-2 test 4a standard.

	Housings	
--	----------	--

Ref.		and collet nut	Latch sleeve + earthing crown		Other metallic components		Remarks	Note
	Material	Surf. treatment	Material	Surf. treatment	Material	Surf. treatment		
С	Brass	chrome	brass/bronze	nickel	brass	nickel	For multipole and coaxial	•
S	Stainless steel	-	brass/bronze	nickel	brass	nickel	For multipole and coaxial	0

Note: detailed characteristics of these materials and treatments are presented in the Unipole-Multipole catalogue.

- First choice alternative
- Special order alternative





		-1-
CO	nta	CIS


Ref.	Contact type	Remarks
Α	Male solder	For multipole and coaxial
С	Male crimp	For coaxial
L	Female solder	For multipole or coaxial type sockets






Variant

Bend relief for models with collet







	Ref.	Со	llet
	Ä	Туре	Code
		С	27
03	Z	С	31
		С	27
		С	31
		K	35
	Z	K	40
		K	45
		K	50

Need	Dim. (mm)		
to be ordered	Cable ø		
separately	max.	min.	
GMB.00.025.DG	2.8	2.5	
GMB.00.028.DG	3.1	2.8	
GMD.00.025.DG	2.8	2.5	
GMD.00.028.DG	3.1	2.8	
GMA.0B.030.DG	3.4	3.0	
GMA.0B.035.DG	3.9	3.5	
GMA.0B.040.DG	4.4	4.0	
GMA.0B.045.DG	5.2	4.5	

 $\label{eq:Note: The "GMD" are thin bend reliefs (for very flexible cables).}$ The last letter "G" of the part number indicates the grey colour of the bend relief.


Accessories and Tooling


For accessories and tooling, please contact us.



Panel cut-outs

Panel Cut-outs

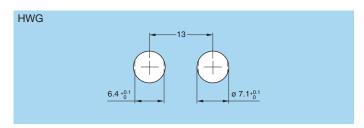

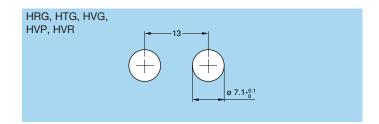

Mounting nuts torque

Component	Torque (Nm)
Retaining nut	0.25
Hexagonal nut	2.00
Coupling nut	2.00

1N = 0.102 kg

Cable assembly


Assembly instructions

In order to ensure the sealing of plugs and sockets on the cable side, it is imperatively necessary to complete their assembly by realizing it with an adapted technique.

We recommend the fitting of an heatshrink boot with inner melting coating of type ATUM (manufactured by the RAY-CHEM company) or similar.

This heatshrink boot is not provided with the connector. Please consult us.

Cable stripping lengths



	ıtact A	Cable stripping lengths (mm)			
Series	Туре	(mm)	L	S	Т
	250	0.7	6	2.5	3
03	302/303/304	0.5	6	2.5	3
	302/303/304 ¹⁾	0.5	13.5	_	2.5

Note:

the tolerances on these dimensions are: L: \pm 0.5 mm; S: \pm 0.5 mm; T: \pm 0.2 mm. ¹⁾ for FVG model with cable crimping.

Recommended coaxial cables

Recommended cables for coaxial types

Cable		Standard		Reference	Imp.	
group	MIL-C-17	IEC 96-2	CCTU 10-01A	Therefolice	$(\dot{\Omega})$	
3	RG.174 A/U	50.2.1	KX 3A	CCX.50.RG1.74AU27N	50 ± 2 Ω	
3 RG.174 A/U	50.2.1	KX 38	CCX.50.RG1.74U25N	50 ± 2 Ω		
1	RG.178 B/U	50.1.1	KX 21A	CCX.50.RG1.78BU18M	50 ± 2 Ω	
4	RG.188 A/U	50.2.3		CCX.50.RG1.88AU24B	50 ± 2 Ω	
1	RG.196 A/U	50.1.2		CCX.50.RG1.96AU20B	50 ± 2 Ω	
4	RG.316 /U	50.2.2	KX 22A	CCX.50.RG3.16BU26M	50 ± 2 Ω	



Product safety notice

PLEASE READ AND FOLLOW ALL INSTUCTIONS CAREFULLY AND CONSULT ALL RELEVENT NATIONAL AND INTERNATIONAL SAFETY REGULATIONS FOR YOUR APPLICATION.
IMPROPER HANDLING, CABLE ASSEMBLY, OR WRONG USE OF CONNECTORS CAN RESULT IN HAZARDOUS SITUATIONS.

1. SHOCK AND FIRE HAZARD

Incorrect wiring, the use of damaged components, presence of foreign objects (such as metal debris), and / or residue (such as cleaning fluids), can result in short circuits, overheating, and / or risk of electric shock.

Mated components should never be disconnected while live as this may result in an exposed electric arc and local overheating, resulting in possible damage to components.

2. HANDLING

Connectors and their components should be visually inspected for damage prior to installation and assembly. Suspect components should be rejected or returned to the factory for verification.

Connector assembly and installation should only be carried out by properly trained personnel. Proper tools must be used during installation and / or assembly in order to obtain safe and reliable performance.

3. USE

Connectors with exposed contacts should never be live (or on the current supply side of a circuit). Under general conditions voltages above 30 VAC and 42 VDC are considered hazardous and proper measures should be taken to eliminate all risk of transmission of such voltages to any exposed metal part of the connector.

4. TEST AND OPERATING VOLTAGES

The maximum admissible operating voltage depends upon the national or international standards in force for the application in question. Air and creepage distances impact the operating voltage; reference values are indicated in the catalog however these may be influenced by PC board design and / or wiring harnesses.

The test voltage indicated in the catalog is 75% of the mean breakdown voltage; the test is applied at 500 V/s and the test duration is 1 minute.

5. CE MARKING C€


CE marking **(** € means that the appliance or equipment bearing it complies with the protection requirements of one or several European safety directives.

CE marking (€ applies to complete products or equipment, but not to electromechanical components, such as connectors.

6. PRODUCT IMPROVEMENTS

The LEMO Group reserves the right to modify and improve to our products or specifications without providing prior notification.

LEMO complete product range

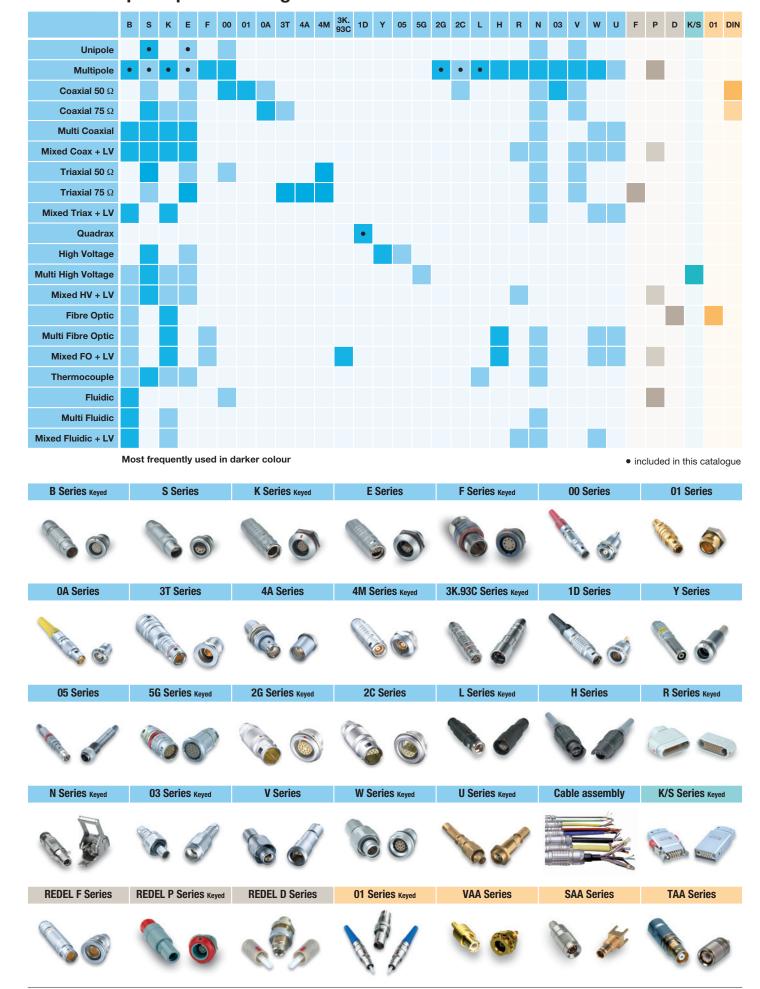

LEMO HEADQUARTERS

SWITZERLAND LEMO SA
Chemin des Champs-Courbes 28 - P.O. Box 194 - CH-1024 Ecublens Tel. (+41 21) 695 16 00 - Fax (+41 21) 695 16 02 - e-mail: info@lemo.com

LEMO SUBSIDIARIES

AUSTRIA LEMO Elektronik GesmbH Lemböckgasse 49/E6-3 1230 Wien Tel: (+43 1) 914 23 20 0 Fax:(+43 1) 914 23 20 11 sales@lemo.at

BRAZIL

BRAZIL LEMO Latin America Ltda Av. José Rocha Bonfim, 214 Salas 224 / 225 Condomínio Praça Capital Ed. Chicago Campinas / SP - Brasil 13080-650 Tel: +55 (11) 98689 4736 info-la@lemo.com

CANADA LEMO Canada Inc 44 East Beaver Creek Road, unit 20 Richmond Hill, Ontario L4B 1G8 Tel: (+1 905) 889 56 78 Fax: (+1 905) 889 49 70 info-canada@lemo.com

CHINA / HONG KONG LEMO Electronics (Shanghai) Co., Ltd First Floor, Block E, 18 Jindian Road, Pudong Shanghai, China, 201206 Tel: (+86 21) 5899 7721 Fax: (+86 21) 5899 7727 cn.sales@lemo.com

DENMARK LEMO Denmark A/S Gammel Mosevej 46 2820 Gentofte Tel: (+45) 45 20 44 00 Fax: (+45) 45 20 44 01 info-dk@lemo.com

FRANCE LEMO France Sàrl 24/28 Avenue Graham Bell Bâtiment Balthus 4 Bussy Saint Georges 77607 Marne la Vallée Cedex 3 Tel: (+33 1) 60 94 60 94 Fax: (+33 1) 60 94 60 90 info-fr@lemo.com

GERMANY LEMO Elektronik GmbH Hanns-Schwindt-Str. 6 81829 München Tel: (+49 89) 42 77 03 Fax: (+49 89) 420 21 92 info@lemo.de

HUNGARY REDEL Elektronika Kft Nagysándor József u. 6-12 1201 Budapest Tel: (+36 1) 421 47 10 Fax: (+36 1) 421 47 57 info-hu@lemo.com

ITALY LEMO Italia srl Viale Lunigiana 25 20125 Milano Tel: (+39 02) 66 71 10 46 Fax: (+39 02) 66 71 10 66 sales.it@lemo.com

JAPAN LEMO Japan Ltd 2-7-22, Mita, Minato-ku, Tokyo, 108-0073 Tel: (+81 3) 54 46 55 10 Fax: (+81 3) 54 46 55 11 lemoinfo@lemo.co.jp

NETHERLANDS / BELGIUM

LEMO Connectors Benelux De Trompet 1060 1967 DA Heemskerk Tel. (+31) 251 25 78 20 Fax (+31) 251 25 78 21 info@lemo.nl

NORWAY / ICELAND LEMO Norway A/S Stanseveien 6B 0975 Oslo Tel: (+47) 22 91 70 40 Fax: (+47) 22 91 70 41 info-no@lemo.com

SINGAPORE LEMO Asia Pte Ltd 4 Leng Kee Road, #06-09 SiS Building Singapore 159088 Tel: (+65) 6476 0672 Fax: (+65) 6474 0672 sg.sales@lemo.com

SPAIN / PORTUGAL IBERLEMO SAU Brasil, 45, 08402 Granollers Barcelona Tel: (+34 93) 860 44 20 Fax: (+34 93) 879 10 77 info-es@lemo.com

SWEDEN / FINLAND LEMO Nordic AB Mariehällsvägen 39A 168 65 Bromma Tel: (+46 8) 635 60 60 Fax: (+46 8) 635 60 61 info-se@lemo.com

SWITZERLAND LEMO Verkauf AG Grundstrasse 22 B 6343 Rotkreuz Tel: (+41 41) 790 49 40 ch.sales@lemo.com

UNITED KINGDOM LEMO UK Ltd 12-20 North Street Worthing, West Sussex, BN11 1DU Tel: (+44 1903) 23 45 43 lemouk@lemo.com

USA LEMO USA Inc P.O. Box 2408 Rohnert Park, CA 94927-2408 Tel: (+1 707) 578 88 11 (+1 800) 444 53 66 Fax:(+1 707) 578 08 69 info-US@lemo.com



LEMO DISTRIBUTORS

AUSTRALIA, CHILE, CZECH REPUBLIC, GREECE, INDIA, ISRAEL, NEW ZEALAND, PAKISTAN, POLAND, RUSSIA, SOUTH AFRICA, SOUTH KOREA, TAIWAN, TURKEY, UKRAINE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

LEMO:

HRG.03.303.CLLPV HRG.03.304.CLLPV HVG.03.302.CLLPV HVG.03.303.CLLPV HVG.03.304.CLLPV HVP.03.250.CLLPV HVR.03.250.CLLPV FVG.03.302.CLAC27 FVG.03.302.CLAC31 FVG.03.304.CLAC31 FVG.03.304.CLAC31 FVG.03.731.LCN FVN.03.250.CLAC27 FVN.03.250.CLAC31 FVN.03.727.LCN HWG.03.304.CLLSV