KSJ Series Spherical Actuator Tact Switches

Features/Benefits

- Spherical actuator allows actuation force off center ± 30° with regard to vertical
- RoHS compliant and compatible
- Designed for mechanisms
- Compliant side actuation

Typical Applications

- Automotive
- Cranes, off road, railway
- Factory automation
- Security systems





Gold

Specification

FUNCTION: Momentary action

CONTACT ARRANGEMENT: 1 make contact = SPST, N.O. DISTANCE BETWEEN BUTTON CENTERS (min.): 7.62 (0.300)

TERMINALS: PC pins SEALING: IP60

Environmental Silver

OPERATING TEMPERATURE: -40°C to 85°C -40°C to 125°C STORAGE TEMPERATURE: -40°C to 85°C -55°C to 125°C

Packaging

Delivered in boxes of 250 pieces.

Mechanical

_		Operating life	Operating life	_
Type	Actuation force	(operations)	(operations)	Travel to
	N (grams)	axial	radial	make (mm)
KSJ0M21160SH	2 ± 0.5	100,000	30,000	0.6 ± 0.3
KSJ0M41180SH	$3,3 \pm 0,8$	100,000	30,000	$0,55 \pm 0,25$
KSJ0M21180SH	2 ± 0,5	100,000	30,000	$0,35 \pm 0,2$
KSJ0M91180SH	$3,9 \pm 0,8$	100,000	30,000	0,7 ± 0,25

Electrical Silver Gold MAXIMUM POWER: 1 VA 0.2 VA MAXIMUM VOLTAGE: 32 VDC 32 VDC MINIMUM VOLTAGE: 20 mV 20 mV MAXIMUM CURRENT: 50 mA 10 mA MINIMUM CURRENT: 1 mA 1 mA

DIELECTRIC STRENGTH (50 Hz, 1 min.): ≥ 250 Vrms

CONTACT RESISTANCE: ≤100m Ω

INSULATION RESISTANCE (100V): ≥ 109 ohms

BOUNCE TIME: \leq 1 ms

Process

Wave soldering, compatible with lead free soldering profile.


NOTE: Specifications listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

This data sheet does not provide enough information for applications which require a certain level of quality or safety such as automotive, medical systems, safety equipment. Please contact your sales representative to get contractual specification package.

How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.


However, please note that all the combinations of these options are not feasible. For any part number different from those listed in the table above, please consult your local representative.

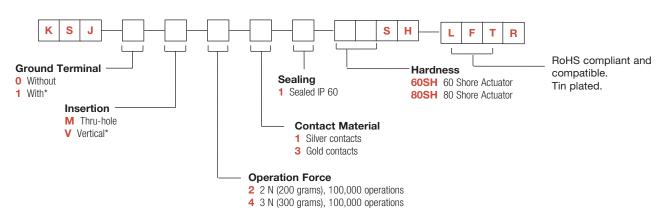

*Note: "1" ground terminal option not available with "V" version. The bracket for the "V" version plays this role.



^{*} Please contact your C&K represenative for any question regarding the product intergration.

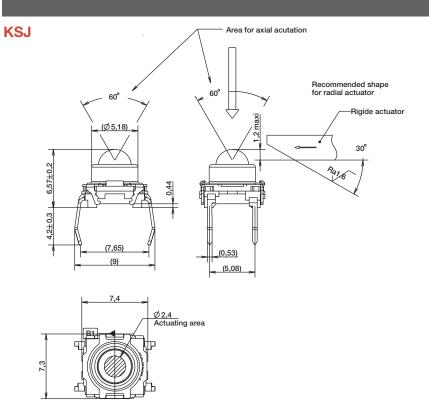






KSJ0M211


INSERTION

M THRU-HOLE





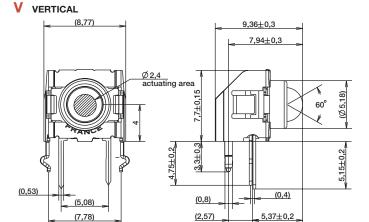

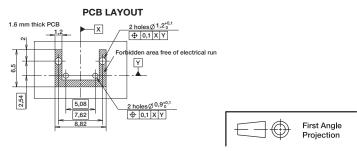

Dimensions are shown: mm (inches) Specifications and dimensions subject to change



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Components:

<u>KSJ0M411 KSJ0M011 KSJ0V411 KSJ1M411 LFS KSJ1M411 LFS KSJ1M411 LFT KSJ0M211 80SH LFT KSJ0M411LFT</u>