
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


Material	High Conductivity Seamless Copper Tube	
Plating	Electro-Tin	
Wire Size	3/0 AWG	
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	
Wire Strip Length	7/8 in.	
Stud Size	1/4 in.	
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	
UL Temperature Rating	90°C	
C.S.A Certified Wire Connector	Yes	
Panduit Color Code on Barrel	ORANGE	
Panduit Die Index No. on Barrel	P50	
Alternate Industry Die Index No. () on Barrel	(14)	









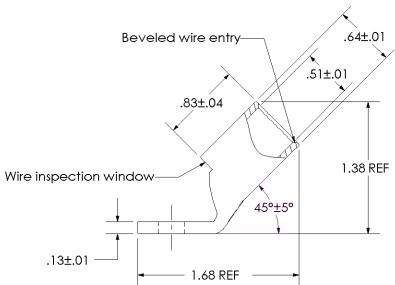

N/A

						CORP. TINLEY PARK, ILLINOIS
00	8 (00	CAD	DDI	DELEASED	10205	LCAS3/0-14H-X

 00
 8/02
 SAB
 DRL
 RELEASED
 10325
 CO

 REV
 DATE
 BY
 CHK
 DESCRIPTION
 ECN
 SCALE

Copper Lug - One-Hole, Short Barrel, 45° Angle Tongue

DRAWING NO / CAD FILE LCAS3_0-14H-CUST

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

LCAS3/0-14H-X