


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	2/0 STR/FLEX
Wire Type	Stranded Copper: Class B & C Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	1-9/16 in.
Stud Size	1/4 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BLACK
Panduit Die Index No. on Barrel	P45
Alternate Industry Die Index No. () on Barrel	(13)



Technical drawing of a Panduit LC BX2.0-14F connector. The drawing shows a side view of the connector with dimensions and labels. The main body is labeled "PANDUIT" and "2/0 STR/FLEX LCBX2.0-14F". A circular feature is labeled ".27±.02 DIA". A dimension of ".96±.04" is shown for the main body height. A dimension of ".35±.04" is shown for the base height. A "Wire inspection window" is indicated on the side of the connector.

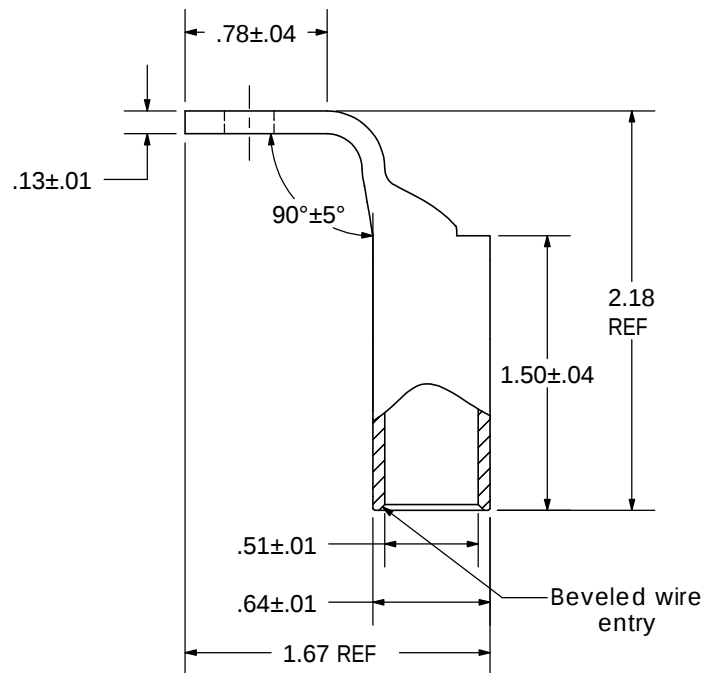

SCALE N/A	DRAWING NO / CAD FILE LCBX2 0-14F-CUST
--------------	---

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCBX2/0-14F-X](#)