

	THIS COPY IS PROVIDED	ON A RESTRICTED BASIS	AND IS NOT TO BE USED II	N ANY WAY DETRIMENTAL '	TO THE INTERESTS OF PANDUIT CORP.
--	-----------------------	-----------------------	--------------------------	-------------------------	-----------------------------------

Material	High Conductivity Seamless Copper Tube			
Plating	Electro-Tin			
Wire Size	300 kcmil			
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric			
Wire Strip Length	1-1/2 in.			
Stud Size	N/A			
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.			
UL Temperature Rating	90° C			
C.S.A Certified Wire Connector	Yes			
Panduit Color Code on Barrel	WHITE			
Panduit Die Index No. on Barrel	P66			
Alternate Industry Die Index No. ( ) on Barrel	(17)			





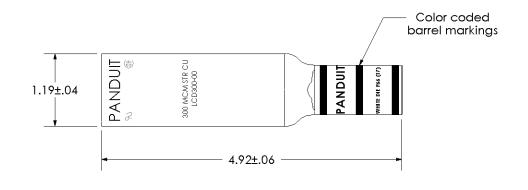

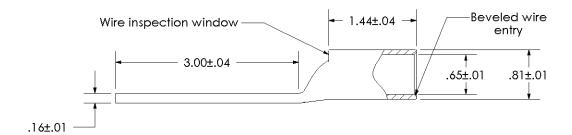

						CORP. TINLEY PARK, ILLINOIS
						LCD300-00-X
00	12/02	SAB	DRL	RELEASED	10343	Copper Lug - Blank Tongue, Standard Barrel
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCD300-00-CUST

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit: LCD300-00-X