


巻線チップインダクタ

WOUND CHIP INDUCTORS

LE SERIES M TYPE

OPERATING TEMP.	-40~+85°C
-----------------	-----------

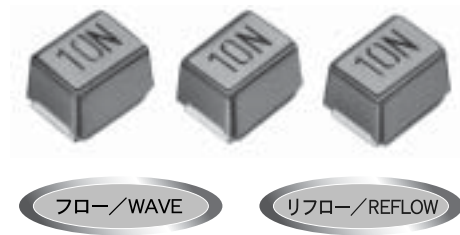

特長 FEATURES

- ・アキシヤルリード形インダクタの製造工程・基本構造を継承した量産性に優れた高品質のインダクタ
- ・耐熱樹脂成形による優れた耐熱性と機械的強度を有したインダクタ
- ・ A high-quality inductor that is simple to mass-produce and conforms to the same production process and basic construction as an axial lead type inductor.
- ・ Constructed of heat-resistant molded resin having excellent heat resistance and mechanical strength.

用途 APPLICATIONS

VTRカメラ、HDD、FDD、液晶TV、カーオーディオ、移動体通信、その他小型電子機器一般

Video cameras, hard disk drives, floppy disk drives, liquid crystal television sets, car audio equipment, mobile communications and other small-sized general electronic appliances.

形名表記法 ORDERING CODE

1 形式 LE 巻線チップインダクタ	3 外径寸法 (mm) 2520(1008) 2.5×2.0 3225(1210) 3.2×2.5	5 公称インダクタンス (μH) 例 10N 0.010 R10 0.1 1R0 1 101 100 ※R=小数点 ※N=nHとしての小数点	6 インダクタンス許容差 (%) J ±5 K ±10 M ±20
2 形状 M△ 角形 MC 角形 / 大電流 MF 角形 / 低 Rdc △=スペース	4 包装 B△ 単品 T△ テーピング △=スペース	7 当社管理記号 △△△△ 標準品 △=スペース	

L E M △ 2 5 2 0 T △ 3 R 3 J ○ ○ ○ ○
 1 2 3 4 5 6 7

1 Type LE Wound chip inductor	3 External Dimensions (mm) 2520(1008) 2.5×2.0 3225(1210) 3.2×2.5	5 Nominal Inductance (μH) example 10N 0.010 R10 0.1 1R0 1 101 100 *R=decimal point *N=0.0(nH type)	6 Inductance Tolerances (%) J ±5 K ±10 M ±20
2 Shape M△ Rectangular Type M C Rectangular / High current Type M F Rectangular / Low Rdc △=Blank space	4 Packaging B△ Bulk T△ Tape & Reel △=Blank space	7 Internal code △△△△ Standard Products △=Blank space	

外形寸法 EXTERNAL DIMENSIONS

Type	LEM2520/LEMC2520/LEMF2520 (1008)	LEMC3225 / LEMF3225 (1210)
Fig.		
L	2.5±0.2 (0.098±0.008)	3.2±0.2 (0.126±0.008)
W	2.0±0.2 (0.079±0.008)	2.5±0.2 (0.098±0.008)
H	1.8±0.2 (0.071±0.008)	2.2±0.2 (0.087±0.008)
a	0.45 (0.018)	0.45 (0.018)
w	1.4±0.1 (0.055±0.004)	1.9±0.1 (0.075±0.004)

Unit : mm(inch)

概略バリエーション AVAILABLE INDUCTANCE RANGE

Type		LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225
Range		I _{max} [mA] I _{max} [mA] R _{dc} [Ω]	I _{max} [mA] R _{dc} [Ω]	I _{max} [mA] R _{dc} [Ω]	I _{max} [mA] R _{dc} [Ω]	I _{max} [mA] R _{dc} [Ω]
高周波タイプ High frequency	Inductance [nH]					
	10	530 10nH 0.26				
一般タイプ/大電流タイプ Ordinary type/High Current type	Inductance [μH]					
	100	280 0.80				
	1.0	245 1.10	475 1.0μH 0.25 ±30%	455 1.0μH 0.13 ±30%	850 1.0μH 0.1 ±30%	500 1.0μH 0.06 ±30%
	10	155 3.50	210 1.5 ±30%	155 0.5 ±30%	300 0.41 ±30%	165 0.22 ±30%
			33μH			
	100	60 21.00		40 5.5 ±30%	100 4.3 ±30%	55 2.1 ±30%

代 表 値 Examples	inductance	I max [mA]	Rdc [Ω]	I max [mA]	Rdc [Ω]	I max [mA]	Rdc [Ω]	I max [mA]	Rdc [Ω]	I max [mA]	Rdc [Ω]
	10nH	530	0.26	—	—	—	—	—	—	—	—
	100nH	280	0.80	—	—	—	—	—	—	—	—
	1μH	245	1.10	475	0.25±30%	455	0.13±30%	850	0.10±30%	500	0.06±30%
	10μH	155	3.50	210	1.5±30%	155	0.50±30%	300	0.41±30%	165	0.22±30%
	100μH	60	21.00	—	—	40	5.50±30%	100	4.30±30%	55	2.1±30%

セクションガイド
Selection Guide

アイテム一覧
Part Numbers

特性図
Electrical Characteristics

梱包
Packaging

信頼性
Reliability Data






使用上の注意
Precautions








etc



流量特性例 DC Bias characteristics(Measured by HP4285A+42841A)

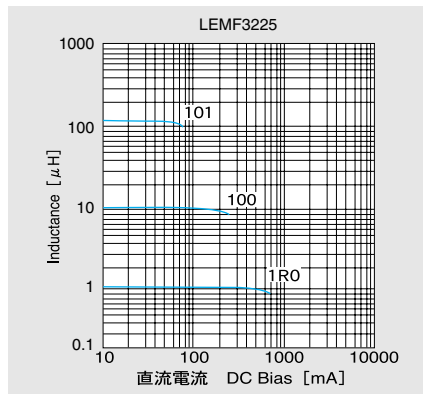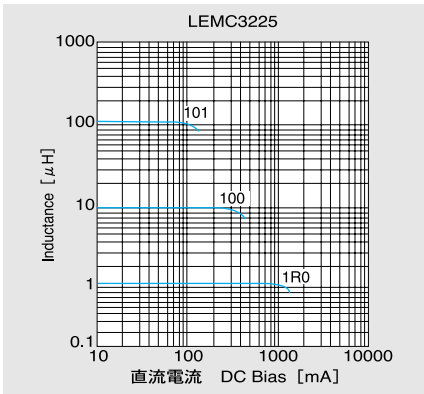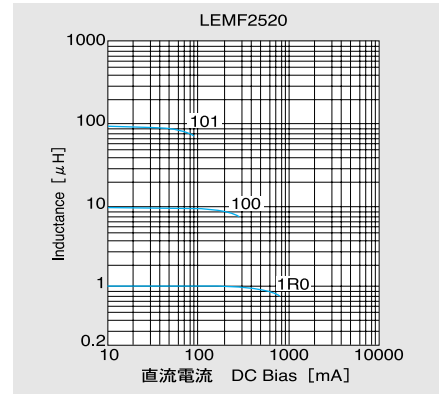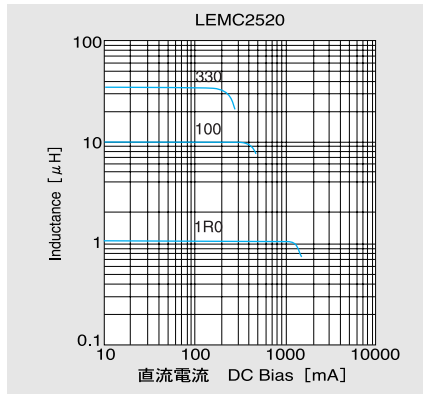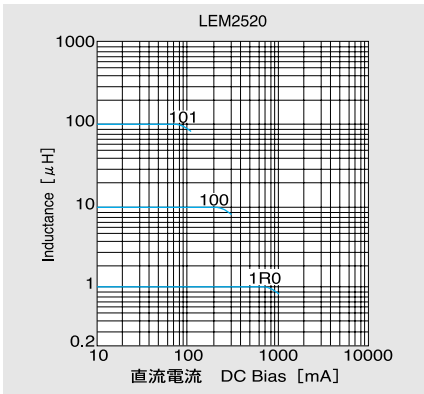


度特性例 Temperature characteristics(Measured by HP4285A+42851A)

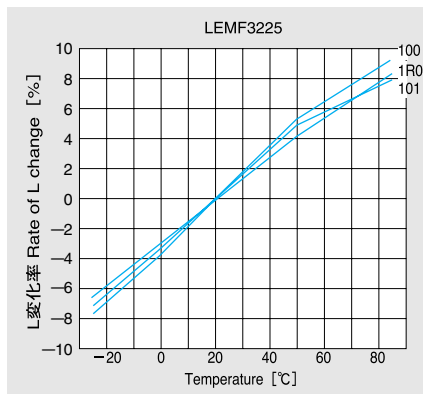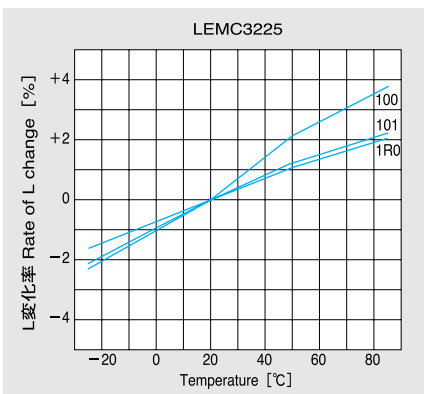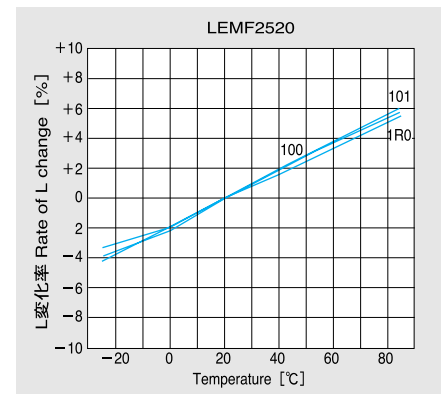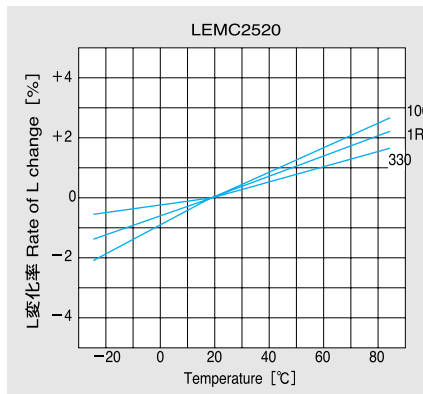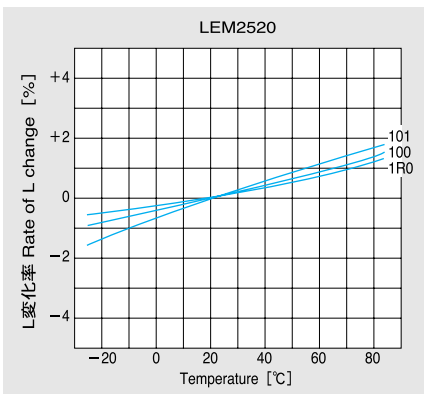


特性図 ELECTRICAL CHARACTERISTICS

Q-周波数特性例 Q-Characteristics


一般タイプ Ordinary type(Measured by HP4285A+42851A)

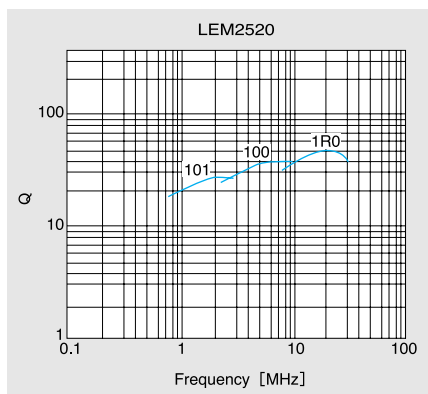


高周波タイプ High frequency type(Measured by HP8720B)

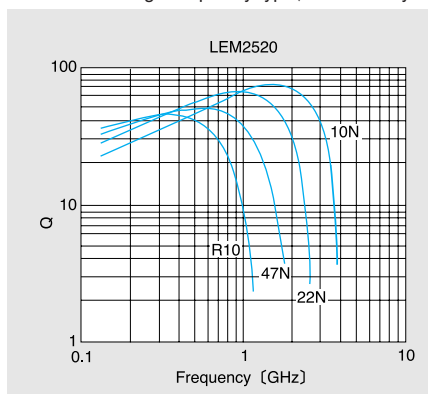

インピーダンス周波数特性例 Impedance-vs-Frequency characteristics(Measured by HP8720B)

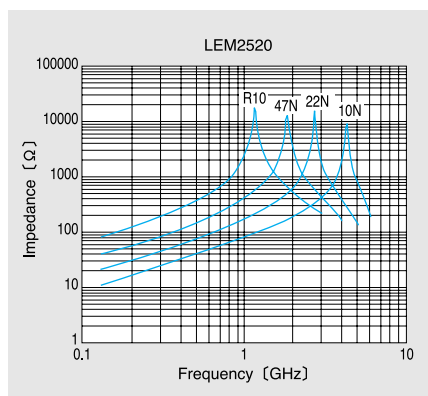

インダクタンス周波数特性例 Inductance-vs-Frequency characteristics(Measured by HP8720B)

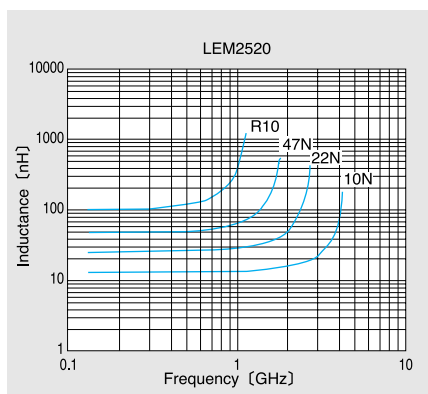

LEM2520 TYPE

高周波タイプ High frequency type

形 名 Ordering code	公称 インダクタンス Inductance [nH]	インダクタンス 許容差 Inductance Tolerance	Q min.	LQ 周波数 Measuring frequency [MHz]	Q (値) (Typical)					周波数 Self-resonant frequency [MHz]		流 DC Resistance [Ω] max.	電流 Rated current [mA] max.
					周波数 Frequency [MHz]					min.	typ.		
					100	300	500	800	1000				
LEM2520□10NK	10	±10%	10	100	25	37	45	52	57	2150	4300	0.26	530
LEM2520□12NK	12		15		26	38	45	52	54	2050	3900	0.27	500
LEM2520□15NK	15				26	38	46	51	51	1850	3500	0.31	480
LEM2520□18NK	18				26	40	48	52	51	1650	3100	0.34	450
LEM2520□22NK	22				28	43	51	56	50	1550	2700	0.38	420
LEM2520□27NK	27				29	44	50	51	48	1400	2450	0.42	410
LEM2520□33NK	33		20		30	45	51	50	43	1250	2200	0.46	400
LEM2520□39NK	39				30	45	50	39	42	1100	2000	0.50	380
LEM2520□47NK	47				30	44	48	43	35	1050	1800	0.56	360
LEM2520□56NK	56				31	44	42	35	25	950	1600	0.65	340
LEM2520□68NK	68				31	41	38	27	17	900	1500	0.70	320
LEM2520□82NK	82				32	44	40	29	17	850	1300	0.75	300
LEM2520□R10K	100				32	41	36	20	8	700	1200	0.80	280

・注：形名の□に 包装記号

・□ Please specify the packaging code. (T: Tape & reel, B: Bulk)

一般タイプ Ordinary type

形 名 Ordering code		公称 インダクタンス Inductance 〔μH〕	インダクタンス 許容差 Inductance Tolerance	Q min.	周波数 Measuring frequency 〔MHz〕	周 波 数 Self-resonant frequency 〔MHz〕 min.	流 DC Resistance 〔Ω〕 max.	電流 Rated current 〔mA〕 max.
LEM2520□R12K		0.12	±10%	30	25.2	600	0.37	520
LEM2520□R15K		0.15				550	0.42	480
LEM2520□R18K		0.18				500	0.46	460
LEM2520□R22K		0.22				450	0.52	430
LEM2520□R27K		0.27				425	0.56	420
LEM2520□R33K		0.33				400	0.60	400
LEM2520□R39K		0.39				375	0.65	375
LEM2520□R47K		0.47				350	0.68	350
LEM2520□R56K		0.56				300	0.75	325
LEM2520□R68K		0.68				270	0.85	300
LEM2520□R82K		0.82				250	1.00	260
LEM2520□1R0J		1.0				±5%	25	7.96
LEM2520□1R2J		1.2	180	1.20	230			
LEM2520□1R5J		1.5	135	1.30	220			
LEM2520□1R8J		1.8	100	1.45	210			
LEM2520□2R2J		2.2	75	1.55	200			
LEM2520□2R7J		2.7	55	1.70	195			
LEM2520□3R3J		3.3	48	1.90	185			
LEM2520□3R9J		3.9	43	2.10	180			
LEM2520□4R7J		4.7	40	2.30	175			
LEM2520□5R6J		5.6	36	2.50	170			
LEM2520□6R8J		6.8	33	2.70	165			
LEM2520□8R2J		8.2	30	3.05	160			
LEM2520□100J		10	2.52	27	3.50		155	
LEM2520□120J		12		23	3.80		150	
LEM2520□150J		15		20	4.40		140	
LEM2520□180J		18		18	4.80		130	
LEM2520□220J		22		17	5.50		125	
LEM2520□270J		27		16	6.30		115	
LEM2520□330J		33		15	7.10		110	
LEM2520□390J		39		14	9.50		90	
LEM2520□470J		47		13	11.10		80	
LEM2520□560J		56		12	12.10		75	
LEM2520□680J		68		11	16.60		70	
LEM2520□820J		82		10	19.00		65	
LEM2520□101J		100		15	0.796		9	21.00

・注：形名の□に 包装記号

・□ Please specify the packaging code. (T: Tape & reel, B: Bulk)

アイテム一覧 PART NUMBERS

LEMC2520 TYPE

大電流タイプ High current type

形 名 Ordering code		公称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	Q (値) (Typical)	周波数 Measuring frequency [MHz]	周 波 数 Self-resonant frequency [MHz] min.	流 DC Resistance [Ω] (30%)	電流 Rated current [mA] max.
LEMC2520□1R0M		1.0	±20%	20	7.96	180	0.25	475
LEMC2520□1R5M		1.5				100	0.3	435
LEMC2520□2R2M		2.2				75	0.4	390
LEMC2520□3R3M		3.3				55	0.5	340
LEMC2520□4R7M		4.7				43	0.7	285
LEMC2520□6R8M		6.8				39	0.9	275
LEMC2520□100K		10	±10%	30	2.52	32	1.5	210
LEMC2520□150K		15				21	1.9	175
LEMC2520□220K		22				18	2.7	160
LEMC2520□330K		33				16	4.8	120

・注：形名の□に 包装記号

・□ Please specify the packaging code. (T: Tape & reel, B: Bulk,)

LEMF2520 TYPE

低Rdcタイプ Low Rdc type

形 名 Ordering code		公称 インダクタンス Inductance 〔μH〕	インダクタンス 許容差 Inductance Tolerance	Q (値) (Typical)	周波数 Measuring frequency 〔MHz〕	周 波 数 Self-resonant frequency 〔MHz〕 min.	流 DC Resistance 〔Ω〕 (±30%)	電流 Rated current 〔mA〕 max.
LEMF2520□1R0M		1.0	±20%	10	7.96	100	0.13	455
LEMF2520□1R5M		1.5				80	0.17	350
LEMF2520□2R2M		2.2				70	0.20	315
LEMF2520□3R3M		3.3				55	0.25	280
LEMF2520□4R7M		4.7				45	0.30	210
LEMF2520□6R8M		6.8				38	0.35	175
LEMF2520□100K		10	±10%	20	2.52	32	0.50	155
LEMF2520□150K		15				28	1.00	130
LEMF2520□220K		22				16	1.20	105
LEMF2520□330K		33				14	2.10	85
LEMF2520□470K		47				11	2.60	60
LEMF2520□680K		68				10	3.30	50
LEMF2520□101K		100			0.796	8	5.50	40

・注：形名の□に 包装記号

・□ Please specify the packaging code. (T: Tape & reel, B: Bulk,)

LEMC3225 TYPE

大電流タイプ High current type

形 名 Ordering code		公称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	Q min.	周波数 Measuring frequency [MHz]	周 波 数 Self-resonant frequency [MHz] min.	流 DC Resistance [Ω] (±30%)	電流 Rated current [mA] max.
LEMC3225□1R0M		1.0	±20%	10	7.96	100	0.10	850
LEMC3225□1R5M		1.5				80	0.12	700
LEMC3225□2R2M		2.2				68	0.15	600
LEMC3225□3R3M		3.3				54	0.18	500
LEMC3225□4R7M		4.7				46	0.22	430
LEMC3225□6R8M		6.8				38	0.29	360
LEMC3225□100K		10	±10%	15	2.52	30	0.41	300
LEMC3225□150K		15				26	0.55	250
LEMC3225□220K		22				20	1.00	210
LEMC3225□330K		33				17	1.30	170
LEMC3225□470K		47				14	1.90	150
LEMC3225□680K		68				12	3.30	120
LEMC3225□101K		100		20	0.796	10	4.30	100
LEMC3225□151K		150				8	6.30	85
LEMC3225□221K		220				6	8.00	70
LEMC3225□331K		330				5	13.00	60

・注：形名の□に 包装記号

・□ Please specify the packaging code. (T: Tape & reel, B: Bulk,)

LEMF3225 TYPE

低Rdcタイプ Low Rdc type

形 名 Ordering code		公称 インダクタンス Inductance [μH]	インダクタンス 許容差 Inductance Tolerance	Q (値) (Typical)	周波数 Measuring frequency [MHz]	周 波 数 Self-resonant frequency [MHz] min.	流 DC Resistance [Ω] (±30%)	電流 Rated current [mA] max.
LEMF3225□1R0M		1.0	±20%	5	7.96	100	0.06	500
LEMF3225□1R5M		1.5				80	0.08	400
LEMF3225□2R2M		2.2				68	0.09	340
LEMF3225□3R3M		3.3				54	0.11	270
LEMF3225□4R7M		4.7				43	0.13	240
LEMF3225□6R8M		6.8				35	0.17	195
LEMF3225□100K		10	±10%	10	2.52	28	0.22	165
LEMF3225□150K		15				24	0.30	145
LEMF3225□220K		22				20	0.45	115
LEMF3225□330K		33				17	0.65	95
LEMF3225□470K		47				13	0.95	85
LEMF3225□680K		68				11	1.3	70
LEMF3225□101K		100			0.796	9	2.1	55
LEMF3225□151K		150				7	3.2	45
LEMF3225□221K		220				6	4.5	35
LEMF3225□331K		330				4.5	7.0	30

・注：形名の□に 包装記号

・□ Please specify the packaging code. (T: Tape & reel, B: Bulk,)

PRECAUTIONS

LER Type LEM Type LB Type


Stages	Precautions	Technical considerations
1.Circuit Design	Operating environment, 1.The products described in this specification are intended for use in general electronic equipment,(office supply equipment, telecommunications systems, measuring equipment, and household equipment). They are not intended for use in mission-critical equipment or systems requiring special quality and high reliability (traffic systems, safety equipment, aerospace systems, nuclear control systems and medical equipment including life-support systems,) where product failure might result in loss of life, injury or damage. For such uses, contact TAIYO YUDEN Sales Department in advance.	
2.PCB Design	Land pattern design 1.Please contact any of our offices for a land pattern, and refer to a recommended land pattern of specifications.	
3.Considerations for automatic placement	Adjustment of mounting machine 1.Excessive impact load should not be imposed on the products when mounting onto the PC boards. 2.Mounting and soldering conditions should be checked beforehand.	1. When installing products, care should be taken not to apply distortion stress as it may deform the products.
4.Soldering	Wave soldering 1.Please refer to the specifications in the catalog for a wave soldering. Reflow soldering 1.Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified. 2.LER012 Type,LB Type Reflow soldering only. Lead free soldering 1.When using products with lead free soldering, we request to use them after confirming of adhesion, temperature of resistance to soldering heat, etc. sufficiently. Recommended conditions for using a soldering iron Put the soldering iron on the land-pattern. Soldering iron's temperature - Below 350 Duration - 3 seconds or less The soldering iron should not directly touch the inductor.	1.If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products.
5.Cleaning	Cleaning conditions LB Type 1.Washing by supersonic waves shall be avoided.	LB Type 1.If washing by supersonic waves, supersonic waves may cause broken products.
6.Handling	Handling 1.Keep the inductors away from all magnets and magnetic objects. Breakaway PC boards (splitting along perforations) 1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board. 2.Board separation should not be done manually, but by using the appropriate devices. Mechanical considerations 1.Please do not give the inductors any excessive mechanical shocks.	1.There is a case that a characteristic varies with magnetic influence. 1.Planning pattern configurations and the position of products should be carefully performed to minimize stress. 1.There is a case to be damaged by a mechanical shock.
7.Storage conditions	Storage 1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled. Recommended conditions Ambient temperature 0 ~ 40 Humidity Below 70% RH The ambient temperature must be kept below 30 Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. For this reason, LE type inductors should be used within one year from the time of delivery. LER type, LB type Please should be used within 6 months from the time of delivery. LE type In case of storage over 6 months, solderability shall be checked before actual usage.	1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place.

RELIABILITY DATA

5

FERRITE PRODUCTS

Item	Specified Value											Test Methods and Remarks	
	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518		LBH1608
1.Operating tem- perature Range	-25~+85℃	-40~+85℃					-25~+85℃						
2.Storage	-40~+85℃						-25~+85℃						
3.Rated Voltage	Within the specified tolerance												The maximum DC value having inductance decrease within 10% and temperature increas within 20℃ by the application of DC bias. LBH1608 LEM Series 5N6~R10: The maximum DC value having temperature increas within 20℃ by the application of DC bias.
4.Inductance	Within the specified tolerance												LER LEM Series 5N6~R10 Measuring equipment Impedance analyzer (HP4291A or its equivalent) Measuring frequency Specified frequency LER LEM Series R12~221 Measuring equipment LCR Meter (HP4285A 42851A or its equivalent) Measuring frequency Specified frequency LB LBC Series Measuring equipment LCR Mater (HP4285A or its equivalent) LBH1608 Series Measuring equipment Impedance analyzer (HP4291A or its equivalent)
5.Q	Within the specified tolerance											12~18 (at 100MHz) min	LER LEM Series 5N6~R10 Measuring equipment Impedance analyzer (HP4291A or its equivalent) Measuring frequency Specified frequency LER LEM Series R12~221 Measuring equipment LCR Meter (HP4285A 42851A or its equivalent) Measuring frequency Specified frequency LB LBC Series Measuring equipment LCR Mater (HP4285A or its equivalent) LBH1608 Series Measuring equipment Impedance analyzer (HP4291A or its equivalent)
6.DC Resistance	Within the specified tolerance												LER LEM LB LBC LBH Series Measuring equipment low ohmmeter (A&D AD5812 or its equivalent)


Item	Specified Value												Test Methods and Remarks											
	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608												
7.Self-Resonant Frequency	Within the specified tolerance												LER LEM Series 5N6~R10 Measuring equipment Network analyzer (HP8720B or its equivalent) LER LEM Series (Exclude LEM2520) R12~ Measuring equipment Impedance analyzer (HP4291A or its equivalent) LEM2520 Measuring equipment Network analyzer (Anritsu MS620J or its equivalent) LB LBC Series Measuring equipment Impedance analyzer (HP4291A or its equivalent) LBH1608 Series Measuring equipment Network analyzer (HP8720B or its equivalent)											
8.Temperature Characteristic	L/L Within±5%			ΔL/L→ Within ±10%	ΔL/L→ Within ±5%	ΔL/L→Within±15%		ΔL/L→Within±15%		ΔL/L→ Within±5% L/L→ Within±0.5nH under 8.2nH		Change of maximum inductance deviation in step 1—5 Exclude CM03MS series <table><tr><th>Step</th><th>Temperature (°C)</th></tr><tr><td>1</td><td>20</td></tr><tr><td>2</td><td>−25</td></tr><tr><td>3</td><td>20 (Reference temperature)</td></tr><tr><td>4</td><td>+85 (Maximum operating temperature)</td></tr><tr><td>5</td><td>20</td></tr></table>	Step	Temperature (°C)	1	20	2	−25	3	20 (Reference temperature)	4	+85 (Maximum operating temperature)	5	20
Step	Temperature (°C)																							
1	20																							
2	−25																							
3	20 (Reference temperature)																							
4	+85 (Maximum operating temperature)																							
5	20																							
9.Resistance to Flexure of Substrate	No breakdown or damage												Warp: 2mm (LER012, LER015, LBC, LB) : 3mm (LEM2520, LEMC2520, LEMF2520, LEMC3225, LEMF3225) Test substrate: Printed board According to JIS C0051 											
10.Body Strength	No breakdown or damage												LER012 LER015 Applique force 15N Duration 5sec. LB・LBC・LBH LEM2520 LEMC2520 LEMF2520 LEMC3225 LEMF3225 Applique force 10N Duration 10sec. LB1608 Applique force 5N Duration 10sec.											
11.Self Resonant Frequency	L/L Within−10%												Measure inductance with application of rated current using LCR metre to compare it with the initial value. (* Excluding 5N6~R10)											

RELIABILITY DATA

Item	Specified Value												Test Methods and Remarks
	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608	
12. Adhesion of terminal electrode	Shall not come off PC board.	No detachment of electrode					Shall not come off PC board.						LER012・LER015 Applied force 15N Duration 5 sec. Test substrate Printed board LB・LBC・LBH LEM2520・LEMC2520・LEMF2520・LEMC3225・LEMF3225 Applied force 10N to X and Y directions Duration 5 sec. Test substrate Printed board
13. Resistance to vibration	L/L Within±5% Q R12~1R0 25min. 1R2~3R3 20min. L/L Within±5% Q R12~100 30min. 120~220 20min.	L/L Within±5% No significant abnormality in appearance.					L/L Within±10% No significant abnormality in appearance.						LER LEM LB・LBC According to JIS C5102 clause 8.2. Vibration type Directions 2 hrs each in X, Y and Z directions. Total 6 hrs Frequency range 10 to 55 to 10 Hz (1min.) Amplitude 1.5mm Mounting method Soldering onto printed board (* Excluding 5N6-R10 LE Series) Recovery At least 1 hr of recovery under the standard condition after the test, followed by the measurement within 2 hrs.

RELIABILITY DATA

Item	Specified Value												Test Methods and Remarks
	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608	
14.Drop test	No significant abnormality in appearance.	L/L Within±5% No significant abnormality in appearance.				L/L Within±10% No significant abnormality in appearance.							LER・LEM LER012・LER015 Drop test Impact material concreta or vinyl tile Height 1m Total number of drops 10 times LEM2520・LEMC2520・LEMF2520・LEMC3225・LEMF3225 Acceleration 980m/sec² Duration 6msec Number of times 6 sides × 3 times Mounting method Soldering onto printed board (* Excluding 10N~R10) Recovery At least 1 hr of recovery under the standard condition after the
15.Solderability	At least 90% of electrode											test, followed by the measurement within 2 hrs. LER・LEM Solder temperature 230±5℃ Duration 2±0.5sec. (LER012・LER015) 5±0.5sec. (LEM2520・LEMC2520・LEMF2520・LEMC3225・LEMF3225) Fiux Methanol solution with 25% of colophony LB・LBH Solder temperature 230±5℃ Duration 5±0.5sec Fiux Methanol solution with 25% of colophony	

Item	Specified Value												Test Methods and Remarks
	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608	
16. Resistance to soldering heat	No significant abnormality in appearance												Conduct following wave soldering twice. (LER012)  Solder temperature $260 \pm 5^{\circ}\text{C}$ Duration 5 ± 0.5 sec. Twice (LER015) 10 ± 1 sec. Once (LEM2520 • LEMC2520 • LEMF2520 • LEMC3225 • LEMF3225) LB • LBH 3 times of reflow oven at $220 \pm 5^{\circ}\text{C}$ for 40 sec. with peak temperature at $235 \pm 5^{\circ}\text{C}$ for 5 sec.
17. Resistance to solvent	No significant abnormality in appearance.												Solvent temperature Room temperature Type of solvent Chlorocarbon type (LEM2520 • LEMC2520 • LEMC3225) Isopropyl alcohol (LEMF2520 • LEMF3225 • LB • LBC) Cleaning conditions Output 20mW/cm^2 Frequency 28kHz Duration 1 min Conduct ultrasonic cleaning. (LEM2520 • LEMC2520 • LEMC3225) 90s. Immersion and cleaning. (LEMF2520 • LEMF3225 • LB • LBC)

RELIABILITY DATA

Item	Specified Value												Test Methods and Remarks												
	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608													
18. Resistance to solvent	L/L Within±10% Q 5N6~18N 10min. 22N~R10 15min. R12~1R0 25min. 1R2~3R3 20min. L/L Within±10% Q 10N~18N 10min. 22N~R10 15min. R12~100 30min. 120~220 20min.	L/L Within±10% Q 10N 10min. 12N~33N 15min. 39N~R10 20min. R12~4R7 30min. 5R6~330 25min. 390~820 20min. 101 15min.	L/L Within±10%									L/L Within±5% L/L within±0.5nH under 8.2 H Q/Q within±20% Q/Q within ±5 under 8.2 H	Conditions for 1cycle <table><tr><th>Step</th><th>Temperature(°C)</th><th>Temperature(°C)</th><th>Duration(min)</th></tr><tr><td>1</td><td>-25</td><td>-40</td><td>30</td></tr><tr><td>2</td><td>+85</td><td>+85</td><td>30</td></tr></table> Temperature for LER012・LER015 Temperature for LEM2520・LEMC2520・LEMF2520・ LEMC3225・LEMF3225 Number of cycle 100 cycle Recovery At least 1 hr of recovery the standard condition after the removal from test chamber, followed by measurement within 2 hrs. LB・LBC・LBH -40~+85°C, maintain times 30min. ,100 cycle Recovery At least 1 hr of recovery under the standard condition after the test, followed by the measurement within 2 hrs.	Step	Temperature(°C)	Temperature(°C)	Duration(min)	1	-25	-40	30	2	+85	+85	30
Step	Temperature(°C)	Temperature(°C)	Duration(min)																						
1	-25	-40	30																						
2	+85	+85	30																						
19. Damp heat	L/L Within±10% Q 5R6~18N 10min. 22N~R10 15min. R12~1R0 25min. 1R2~3R3 20min. L/L Within±10% Q 10N~18N 10min. 22N~R10 15min. R12~100 30min. 120~220	L/L Within±10% Q 10N 10min. 12N~33N 15min. 39N~R10 20min. R12~4R7 30min. 5R6~330 25min. 390~820 20min. 101 15min.	L/L Within±10%									L/L Within±5% L/L within±0.5nH under 8.2 H Q/Q Within±20% Q/Q within ±5 under 8.2 H	Temperature 60±2°C Humidity 90~95%RH Duration 1000 hrs Recovery At least 1 hr of recovery the standard condition after the removal from test chamber, followed by measurement within 2 hrs.												

RELIABILITY DATA

Item	Specified Value												Test Methods and Remarks
	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608	
20.Loading under damp heat	L/L Within±10% Q R12~1R0 25min. 1R2~3R3 20min. L/L Within±10% Q R12~100 30min. 120~220 20min.	L/L Within±10% Q R12~4R7 30min. 5R6~330 25min. 390~820 20min. 101 15min.	L/L Within±10%									L/L Within±5% L/L within 0.5nH under 8.2 H Q/Q within±20% Q/Q within ±5 under 8.2 H	LER · LEM · LB · LBC Temperature 60±2℃ (Excluding nH range) Humidity 90~95%RH Duration 1000 hrs Applied current Rated current Recovery At least 1 hr of recovery the standard condition after the removal from test chamber, followed by measurement within 2 hrs.
21.Hirh temperaturte life test	L/L Within±10% Q 5R6~18N 10min. 22N~R10 15min. R12~1R0 25min. 1R2~3R3 20min. L/L Within±10% Q 10N~18N 10min. 22N~R10 15min. R12~100 30min. 120~220 20min.	L/L Within±10% Q 10N 10min. 12N~33N 15min. 39N~R10 20min. R12~4R7 30min. 5R6~330 25min. 390~820 20min. 101 15min.	L/L Within±10%									LER · LEM Temperature 85±2℃ Duration 1000 hrs Recovery At least 1 hr of recovery the standard condition after the removal from test chamber, followed by measurement within 2 hrs.	
22.Loading at high temperature	L/L Within±10% Q R12~1R0 25min. 1R2~3R3 20min. L/L Within±10% Q R12~100 30min. 120~220 20min.						L/L Within±10%				L/L Within±5% L/L within±0.5nH under 8.2 H Q/Q Within±20% Q/Q within ±0.5 under 8.2 H	LER · LB · LBC Temperature 85±2℃ (Excluding nH range) Duration 1000 hrs Applied current Rated current Recovery At least 1 hr of recovery the standard condition after the removal from test chamber, followed by measurement within 2 hrs.	

RELIABILITY DATA


Item	Specified Value												Test Methods and Remarks	
	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608		
23.Low temperature life test	L/L Within±10% Q 5R6~18N 10min. 22N~R10 15min. R12~1R0 25min. 1R2~3R3 20min. L/L ±10% Q 10N~18N 10min. 22N~R10 15min. R12~100 30min. 120~220 20min.	L/L Within±10% Q 10N 10min. 12N~33N 15min. 39N~R10 20min. R12~4R7 30min. 5R6~330 25min. 390~820 20min. 101 15min.	L/L Within±10%										L/L Within±5% L/L within±0.5nH under 8.2 H Q/Q Within±20% Q/Q within ±5 under 8.2 H	LER・LEM・LB・LBC・LBH Temperature -40±2℃ Duration 1000 hrs Recovery At least 1 hr of recovery the standard condition after the removal from test chamber, followed by measurement within 2 hrs.
24.Standard condition	"Sutandard condition" referred to herein defined as follows 5 to 35 of temperature, 45 to 85% relative humidity, and 86 to 106kPa of air pressure.When there are questions concerning measurement results In order to provide correlation data, the test shall be conducted under condition of 20±2 of temperature, 45 to 85% to 106kPa of air pressure. Unless otherwise specified all the test are conducted under the "standard condition"					Standard test condition Unless otherwise specified,Temperature20±15 of temperature, 65±20% of relative humidity.When there are question concerning measurement result In order to provide correlation date, the test shall be condition of 20±2 of tenterature, 65±5% relative humidity. Inductance is in accordance with our measured value.								

梱包 PACKAGING

①標準数量 Standard Quantity

形 式 Type	標準数量 Standard Quantity [pcs]	
	Bulk / Bag	テーピング Tape&Reel
LEM2520/LEMC2520/LEMF2520	2000	2000
LEMC3225/LEMF3225	2000	2000
LER012	3000	3000
LER015	3000	3000


②テーピング 質 Tape material

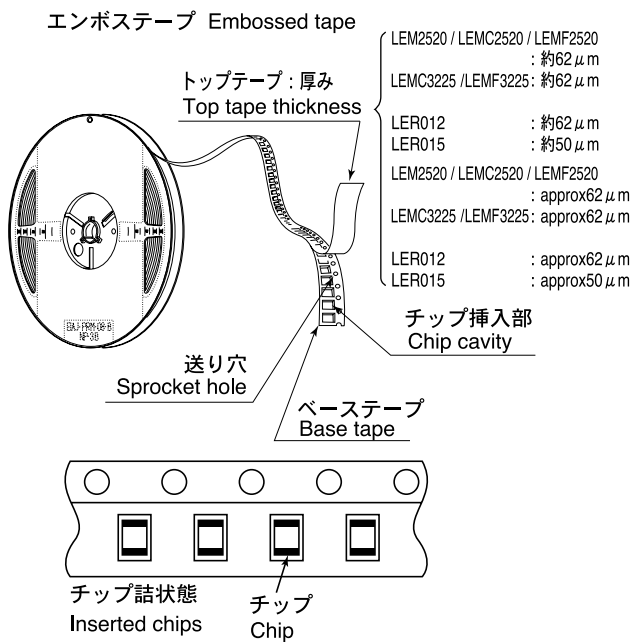

形 式 Type	チップ Chip Cavity		ピッチ Insertion Pitch	テープ Tape Thickness	
	A	B	F	K	T
LEM2520/ LEMC2520/ LEMF2520	2.3 $\pm$ 0.1 (0.091 $\pm$ 0.004)	2.7 $\pm$ 0.1 (0.106 $\pm$ 0.004)	4.0 $\pm$ 0.1 (0.157 $\pm$ 0.004)	2.1 (0.083) $\pm$ 0.1 ($\pm$ 0.004)	0.3 (0.012) $\pm$ 0.05 ($\pm$ 0.002)
LEMC3225/ LEMF3225	2.8 $\pm$ 0.2 (0.110 $\pm$ 0.008)	3.55 $\pm$ 0.2 (0.140 $\pm$ 0.008)	4.0 $\pm$ 0.1 (0.157 $\pm$ 0.004)	2.45 (0.096) $\pm$ 0.1 (0.004)	0.3 (0.012) $\pm$ 0.05 (0.002)
LER012	1.45 $\pm$ 0.2 (0.057 $\pm$ 0.008)	2.43 $\pm$ 0.2 (0.096 $\pm$ 0.008)	4.0 $\pm$ 0.1 (0.157 $\pm$ 0.004)	2.0 (0.079) max.	0.3 (0.012) max.
LER015	2.0 $\pm$ 0.2 (0.079 $\pm$ 0.008)	3.6 $\pm$ 0.2 (0.142 $\pm$ 0.008)	4.0 $\pm$ 0.1 (0.157 $\pm$ 0.004)	2.0 (0.079) max.	0.3 (0.012) $\pm$ 0.05 ($\pm$ 0.002)


Unit: mm (inch)

④リーダー / Leader and Blank Portion

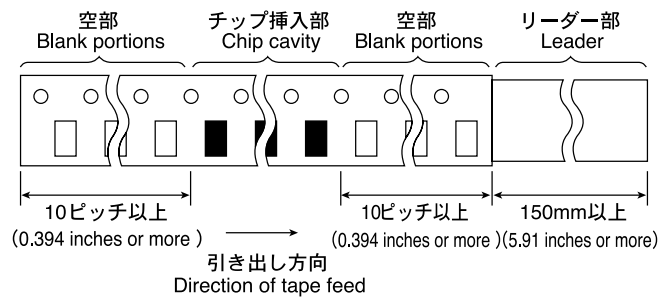


③テーピング寸法 Taping Dimensions

エン ステープ 8mm Embossed Tape (0.315 inches wide)

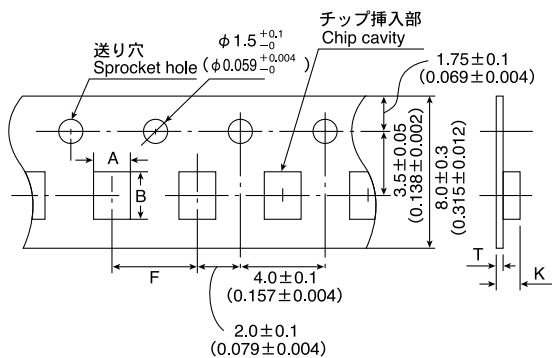

⑤ リール寸法 Reel Size

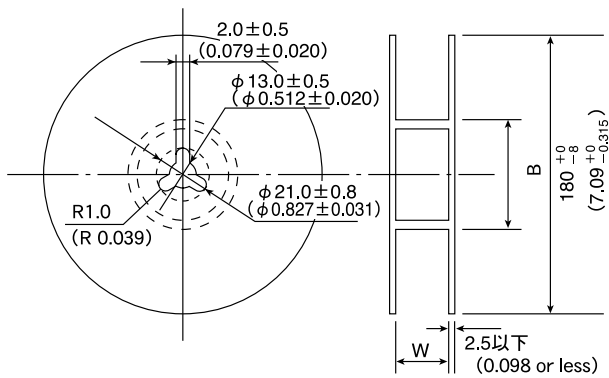

Unit: mm (inch)

形式 Type	W	B
LER012	9±0.8 (0.354±0.031)	60 ⁺¹ ₋₀ (2.36 ^{+0.039} ₋₀)
LER015	10.0±1.5 (0.394±0.059)	50±1 (1.97±0.039)
LEM2520 LEMC2520 LEMF2520	9±0.8 (0.354±0.031)	60 ⁺¹ ₋₀ (2.36 ^{+0.039} ₋₀)
LEMC3225 LEMF3225	9±0.8 (0.354±0.031)	60 ⁺¹ ₋₀ (2.36 ^{+0.039} ₋₀)

⑥ トップテープ強度 Top Tape Strength

トップテープのし、図にて0.2 0.7Nと

The top tape requires a peel-off force of 0.2 to 0.7N in the direction of the arrow as illustrated below.

