


LNY

Screw Terminal Type, 85°C Higher Capacitance

- Suited for equipment down sizing.
- Load life of 2000 hours application of ripple current at 85°C
- Compliant to the RoHS directive (2011/65/EU).


LNY




■ Specifications

Item	Performance Characteristics		
Category Temperature Range	- 40 to +85°C		
Rated Voltage Range	350 to 450V		
Rated Capacitance Range	820 to 22000μF		
Capacitance Tolerance	±20% (120Hz, 20°C)		
Leakage Current	After 5 minutes' application of rated voltage, leakage current is not more than $3\sqrt{CV}$ (μA) or 5 mA, whichever is smaller. (at 20°C) [C: Rated Capacitance(μF), V: Voltage (V)]		
Tangent of loss angle (tan δ)	0.25MAX. (120Hz at 20°C)		
Stability at Low Temperature	Rated voltage(V)	350 to 450	Measurement frequency : 120Hz
	Impedance ratio ZT/Z20(MAX.)	Z - 40°C / Z+20°C	
		12	
Insulation Resistance	The insulation resistance shall be more than 100MΩ at DC 500V application between terminal and bracket.		
Voltage proof	There is no abnormality during AC 2500V 1 minute's application between terminal and bracket.		
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 2000 hours at 85°C, the peak voltage shall not exceed the rated voltage.	Capacitance change	Within ±20% of the initial capacitance value
		tan δ	300% or less than the initial specified value
		Leakage current	Less than or equal to the initial specified value
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the requirements listed at right.	Capacitance change	Within ±20% of the initial capacitance value
		tan δ	300% or less than the initial specified value
		Leakage current	Less than or equal to the initial specified value
Marking	Printed with white color letter on black sleeve		

■ Drawing

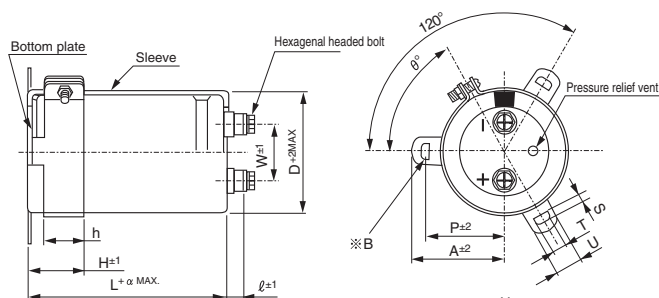

※ B
3-leg brackets for φ90 capacitors have different hole shapes from the ordinary ones illustrated below.



Note) The brackets will be supplied in the separate box.

Type numbering system (Example: 400V 10000μF)

1	2	3	4	5	6	7	8	9	10	11	12	13	14
L	N	Y	2	G	1	0	3	M	S	E	J		
Case dia. code			Configuration※		Capacitance tolerance (±20%)		Rated Capacitance (10000μF)		Rated Voltage (400V)		Series name		Type
φD			Code		Code		Code		Code		Code		
51			F		63.5		G		76.2		H		
90			J										
Mounting bracket			φ51 to φ90		3-leg brackets		2-leg brackets		No brackets		Code less		

※ Configuration

Cr (III) Plating (RoHS compliant)
SE

Please refer to page 329 for schematic of dimensions.

※ Please contact to us if PVCless products are required.

● Dimension of terminal pitch (W) and length (ℓ) and Nominal dia. of bolt (mm)

φD	W	ℓ	α	Nominal dia. of bolt
51	22.0	6	3	M5
63.5	28.6	6	3	M5
76.2	31.8	6	3	M5
90	31.8	6	3	M5

● Dimension of mounting bracket (mm)

Symbol	3-Leg				2-Leg			
	51	63.5	76.2	90	51	63.5	76.2	90
P	32.5	38.1	44.5	50.8	33.2	40.5	46.5	53
A	38.5	43	49.2	58.5	40	46.5	53	59
T	7.5	8.0	7.0	8.0	6.0	7.0	6.0	6.0
S	5.0	5.0	5.0	5.0	4.5	4.5	4.5	4.5
U	12	14	14	18	14	14	14	14
θ	60	60	60	60	30	30	30	30
H	20	25	30	35	25	35	35	35
h	15	20	24	25	15	20	20	20

● Dimension table in next page.

LNY

■ Dimensions

350V (2V)					
Cap. (μF)	Size φD × L (mm)	Rated ripple (Arms)	tan δ	Leakage Current (mA)	Code
1500	51 × 60	9.3	0.25	2.17	LNY2V152MSEF
1800	51 × 70	10.0	0.25	2.38	LNY2V182MSEF
2200	51 × 80	11.1	0.25	2.63	LNY2V222MSEF
2700	51 × 90	12.2	0.25	2.92	LNY2V272MSEF
	63.5 × 65	11.9	0.25	2.92	LNY2V272MSEG
3300	51 × 105	13.8	0.25	3.22	LNY2V332MSEF
	63.5 × 75	13.1	0.25	3.22	LNY2V332MSEG
3900	51 × 130	14.8	0.25	3.50	LNY2V392MSEF
	63.5 × 80	14.1	0.25	3.50	LNY2V392MSEG
4700	51 × 140	15.9	0.25	3.85	LNY2V472MSEF
	63.5 × 90	15.8	0.25	3.85	LNY2V472MSEG
	76.2 × 70	15.7	0.25	3.85	LNY2V472MSEH
5600	63.5 × 100	17.1	0.25	4.20	LNY2V562MSEG
	76.2 × 85	17.0	0.25	4.20	LNY2V562MSEH
6800	63.5 × 125	19.2	0.25	4.63	LNY2V682MSEG
	76.2 × 95	18.8	0.25	4.63	LNY2V682MSEH
8200	63.5 × 145	20.6	0.25	5.00	LNY2V822MSEG
	76.2 × 105	20.2	0.25	5.00	LNY2V822MSEH
10000	63.5 × 165	23.2	0.25	5.00	LNY2V103MSEG
	76.2 × 125	23.5	0.25	5.00	LNY2V103MSEH
	90 × 95	23.5	0.25	5.00	LNY2V103MSEJ
12000	76.2 × 150	24.0	0.25	5.00	LNY2V123MSEH
	90 × 110	24.1	0.25	5.00	LNY2V123MSEJ
15000	76.2 × 190	28.0	0.25	5.00	LNY2V153MSEH
	90 × 140	29.2	0.25	5.00	LNY2V153MSEJ
18000	76.2 × 210	30.2	0.25	5.00	LNY2V183MSEH
	90 × 155	31.1	0.25	5.00	LNY2V183MSEJ
22000	90 × 190	35.4	0.25	5.00	LNY2V223MSEJ

400V (2G)					
Cap. (μF)	Size φD × L (mm)	Rated ripple (Arms)	tan δ	Leakage Current (mA)	Code
1000	51 × 60	6.4	0.25	1.90	LNY2G102MSEF
1200	51 × 65	7.1	0.25	2.08	LNY2G122MSEF
1500	51 × 75	8.1	0.25	2.32	LNY2G152MSEF
1800	51 × 85	8.7	0.25	2.55	LNY2G182MSEF
	63.5 × 65	9.1	0.25	2.55	LNY2G182MSEG
2200	51 × 95	9.6	0.25	2.81	LNY2G222MSEF
	63.5 × 75	10.1	0.25	2.81	LNY2G222MSEG
2700	51 × 115	10.5	0.25	3.12	LNY2G272MSEF
	63.5 × 85	11.6	0.25	3.12	LNY2G272MSEG
3300	51 × 145	12.4	0.25	3.45	LNY2G332MSEF
	63.5 × 95	13.0	0.25	3.45	LNY2G332MSEG
3900	51 × 170	13.8	0.25	3.75	LNY2G392MSEF
	63.5 × 105	14.2	0.25	3.75	LNY2G392MSEG
	76.2 × 85	14.6	0.25	3.75	LNY2G392MSEH
4700	63.5 × 125	16.1	0.25	4.11	LNY2G472MSEG
	76.2 × 95	16.2	0.25	4.11	LNY2G472MSEH
5600	63.5 × 140	16.9	0.25	4.49	LNY2G562MSEG
	76.2 × 105	17.6	0.25	4.49	LNY2G562MSEH
6800	63.5 × 165	19.1	0.25	4.95	LNY2G682MSEG
8200	63.5 × 210	21.2	0.25	5.00	LNY2G822MSEG
	76.2 × 150	21.2	0.25	5.00	LNY2G822MSEH
	90 × 120	21.0	0.25	5.00	LNY2G822MSEJ
10000	76.2 × 170	22.4	0.25	5.00	LNY2G103MSEH
	90 × 130	22.0	0.25	5.00	LNY2G103MSEJ
12000	76.2 × 220	26.0	0.25	5.00	LNY2G123MSEH
	90 × 155	26.0	0.25	5.00	LNY2G123MSEJ
15000	90 × 190	28.3	0.25	5.00	LNY2G153MSEJ
18000	90 × 230	30.6	0.25	5.00	LNY2G183MSEJ

450V (2W)					
Cap. (μF)	Size φD × L (mm)	Rated ripple (Arms)	tan δ	Leakage Current (mA)	Code
820	51 × 60	4.9	0.25	1.82	LNY2W821MSEF
1000	51 × 70	5.5	0.25	2.01	LNY2W102MSEF
1200	51 × 75	6.0	0.25	2.20	LNY2W122MSEF
1500	51 × 85	6.8	0.25	2.46	LNY2W152MSEF
	63.5 × 65	7.9	0.25	2.46	LNY2W152MSEG
1800	51 × 95	7.9	0.25	2.70	LNY2W182MSEF
	63.5 × 75	8.9	0.25	2.70	LNY2W182MSEG
2200	51 × 125	9.2	0.25	2.98	LNY2W222MSEF
	63.5 × 85	9.8	0.25	2.98	LNY2W222MSEG
2700	51 × 145	10.3	0.25	3.31	LNY2W272MSEF
	63.5 × 90	10.8	0.25	3.31	LNY2W272MSEG
3300	51 × 170	11.1	0.25	3.66	LNY2W332MSEF
	63.5 × 105	12.0	0.25	3.66	LNY2W332MSEG
	76.2 × 85	12.6	0.25	3.66	LNY2W332MSEH
3900	63.5 × 125	13.5	0.25	3.97	LNY2W392MSEG
	76.2 × 95	14.0	0.25	3.97	LNY2W392MSEH
4700	63.5 × 145	15.2	0.25	4.36	LNY2W472MSEG
	76.2 × 105	15.6	0.25	4.36	LNY2W472MSEH
5600	63.5 × 165	17.0	0.25	4.76	LNY2W562MSEG
	76.2 × 125	17.6	0.25	4.76	LNY2W562MSEH
6800	63.5 × 210	19.1	0.25	5.00	LNY2W682MSEG
	76.2 × 150	19.6	0.25	5.00	LNY2W682MSEH
	90 × 120	19.5	0.25	5.00	LNY2W682MSEJ
8200	76.2 × 170	20.1	0.25	5.00	LNY2W822MSEH
	90 × 130	20.1	0.25	5.00	LNY2W822MSEJ
10000	76.2 × 210	23.0	0.25	5.00	LNY2W103MSEH
	90 × 155	22.9	0.25	5.00	LNY2W103MSEJ
12000	90 × 190	26.0	0.25	5.00	LNY2W123MSEJ
15000	90 × 220	29.6	0.25	5.00	LNY2W153MSEJ

● Frequency coefficient of rated ripple current

Frequency (Hz)	50	60	120	360	1k	10k or more
Coefficient	0.80	0.82	1.00	1.20	1.35	1.40

Rated ripple current (Arms) at 85°C 120Hz

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nichicon:

[LNy2G103MSEH](#) [LNy2G472MSEG](#) [LNy2G682MSEG](#) [LNy2W103MSEH](#) [LNy2W472MSEG](#) [LNy2V223MSEJ](#)
[LNy2G153MSEJ](#) [LNy2W123MSEJ](#) [LNy2V183MSEH](#) [LNy2G822MSEJ](#) [LNy2V472MSEF](#) [LNy2W332MSEF](#)
[LNy2V562MSEG](#) [LNy2W682MSEH](#) [LNy2G392MSEF](#) [LNy2G562MSEH](#) [LNy2V103MSEJ](#) [LNy2V332MSEF](#)
[LNy2W153MSEJ](#) [LNy2W392MSEG](#) [LNy2V682MSEH](#) [LNy2V152MSEF](#) [LNy2V182MSEF](#) [LNy2W102MSEF](#)
[LNy2W682MSEG](#) [LNy2G122MSEF](#) [LNy2W222MSEF](#) [LNy2V392MSEG](#) [LNy2G332MSEG](#) [LNy2V222MSEF](#)
[LNy2W332MSEH](#) [LNy2G392MSEH](#) [LNy2V682MSEG](#) [LNy2W122MSEF](#) [LNy2W821MSEF](#) [LNy2W272MSEG](#)
[LNy2W152MSEG](#) [LNy2V472MSEH](#) [LNy2W182MSEG](#) [LNy2W272MSEF](#) [LNy2G222MSEG](#) [LNy2V123MSEJ](#)
[LNy2G103MSEJ](#) [LNy2V472MSEG](#) [LNy2V153MSEJ](#) [LNy2G332MSEF](#) [LNy2G123MSEJ](#) [LNy2V103MSEG](#)
[LNy2G392MSEG](#) [LNy2G222MSEF](#) [LNy2G182MSEF](#) [LNy2W682MSEJ](#) [LNy2W562MSEH](#) [LNy2G102MSEF](#)
[LNy2G183MSEJ](#) [LNy2W822MSEJ](#) [LNy2G822MSEH](#) [LNy2V562MSEH](#) [LNy2G472MSEH](#) [LNy2V123MSEH](#)
[LNy2W152MSEF](#) [LNy2V153MSEH](#) [LNy2W182MSEF](#) [LNy2G272MSEF](#) [LNy2V332MSEG](#) [LNy2W562MSEG](#)
[LNy2V103MSEH](#) [LNy2V822MSEH](#) [LNy2V272MSEG](#) [LNy2V392MSEF](#) [LNy2W103MSEJ](#) [LNy2W332MSEG](#)
[LNy2W392MSEH](#) [LNy2W822MSEH](#) [LNy2G272MSEG](#) [LNy2G123MSEH](#) [LNy2G152MSEF](#) [LNy2G182MSEG](#)
[LNy2G562MSEG](#) [LNy2V183MSEJ](#) [LNy2G822MSEG](#) [LNy2V272MSEF](#) [LNy2W222MSEG](#) [LNy2V822MSEG](#)