

Zener Diodes



FEATURES

- High reliability
- Voltage range includes 37 breakdown voltages from 3.3 V to 100 V with $\pm 2\%$ for BZG05B-series
- Fits onto 5 mm SMD footpads
- Wave and reflow solderable
- AEC-Q101 qualified available
- Base P/N-E3 - RoHS-compliant, commercial grade
- Base P/NHE3 - RoHS-compliant, AEC-Q101 qualified
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS
COMPLIANT

APPLICATIONS

- Voltage stabilization

PRIMARY CHARACTERISTICS

PARAMETER	VALUE	UNIT
V_Z range nom.	3.3 to 100	V
Test current I_{ZT}	2.7 to 80	mA
V_{BR}	5.49 to 98	V
V_{WM}	4.7 to 90	V
P_{PPM}	40	W
T_J max.	150	°C
V_Z specification	Pulse current	
Int. construction	Single	
Polarity	Uni-directional	

ORDERING INFORMATION

DEVICE NAME	ORDERING CODE	TAPED UNITS PER REEL	MINIMUM ORDER QUANTITY
BZG05B-series	BZG05B-series-E3-TR	1500 per 7" reel	6000/box
BZG05B-series	BZG05B-series-E3-TR3	6000 per 13" reel	6000/box
BZG05B-series	BZG05B-series-HE3-TR	1500 per 7" reel	6000/box
BZG05B-series	BZG05B-series-HE3-TR3	6000 per 13" reel	6000/box

PACKAGE

PACKAGE NAME	WEIGHT	MOLDING COMPOUND FLAMMABILITY RATING	MOISTURE SENSITIVITY LEVEL	SOLDERING CONDITIONS
DO-214AC	77 mg	UL 94 V-0	MSL level 1 (according J-STD-020)	260 °C/10 s at terminals

ABSOLUTE MAXIMUM RATINGS ($T_{amb} = 25\text{ °C}$, unless otherwise specified)

PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Power dissipation	$R_{thJA} < 30\text{ K/W}$, $T_{amb} = 60\text{ °C}$	P_{tot}	3000	mW
	$R_{thJA} < 100\text{ K/W}$, $T_{amb} = 25\text{ °C}$	P_{tot}	1250	mW
Non repetitive peak surge power dissipation	$t_p = 100\text{ }\mu\text{s}$ sq. pulse, $T_J = 25\text{ °C}$ prior to surge	P_{ZSM}	60	W
Junction to lead		R_{thJL}	30	K/W
Junction to ambient air	Mounted on epoxy-glass hard tissue, fig. 1a	R_{thJA}	150	K/W
	Mounted on epoxy-glass hard tissue, fig. 1b	R_{thJA}	125	K/W
	Mounted on Al-oxid-ceramic (Al_2O_3), fig. 1b	R_{thJA}	100	K/W
Junction temperature		T_J	150	°C
Storage temperature range		T_{stg}	-65 to +150	°C
Forward voltage (max.)	$I_F = 0.2\text{ A}$	V_F	1.2	V

**ELECTRICAL CHARACTERISTICS** ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

PART NUMBER	ZENER VOLTAGE RANGE			TEST CURRENT		REVERSE LEAKAGE CURRENT		DYNAMIC RESISTANCE		TEMPERATURE COEFFICIENT	
	V_Z at I_{ZT1}			I_{ZT1}	I_{ZT2}	I_R at V_R		Z_Z at I_{ZT1}	Z_{ZK} at I_{ZT2}	TC_{VZ} at I_{ZT1}	
	V			mA	mA	μA	V	Ω		% / K	
	MIN.	NOM.	MAX.			MAX.		MAX.	MAX.	MIN.	MAX.
BZG05B3V3	3.23	3.3	3.37	80	1	40	1	20	400	-0.08	-0.05
BZG05B3V6	3.53	3.6	3.67	60	1	20	1	20	500	-0.08	-0.05
BZG05B3V9	3.82	3.9	3.98	60	1	10	1	15	500	-0.07	-0.02
BZG05B4V3	4.21	4.3	4.39	50	1	3	1	13	500	-0.07	-0.01
BZG05B4V7	4.61	4.7	4.79	45	1	3	1	13	600	-0.03	0.04
BZG05B5V1	5.00	5.1	5.20	45	1	1	1.5	10	500	-0.01	0.04
BZG05B5V6	5.49	5.6	5.71	45	1	1	2	7	400	0	0.045
BZG05B6V2	6.08	6.2	6.32	35	1	1	3	4	300	0.01	0.055
BZG05B6V8	6.66	6.8	6.94	35	1	1	4	3.5	300	0.015	0.06
BZG05B7V5	7.35	7.5	7.65	35	0.5	1	4.5	3	200	0.02	0.065
BZG05B8V2	8.04	8.2	8.36	25	0.5	1	6.2	5	200	0.03	0.07
BZG05B9V1	8.92	9.1	9.28	25	0.5	1	6.8	5	200	0.035	0.075
BZG05B10	9.80	10	10.20	25	0.5	0.5	7	7	200	0.04	0.08
BZG05B11	10.78	11	11.22	20	0.5	0.5	8.2	8	300	0.045	0.08
BZG05B12	11.76	12	12.24	20	0.5	0.5	9.1	9	350	0.045	0.085
BZG05B13	12.74	13	13.26	20	0.5	0.5	10	10	400	0.05	0.085
BZG05B15	14.70	15	15.30	15	0.5	0.5	11	15	500	0.055	0.09
BZG05B16	15.68	16	16.32	15	0.5	0.5	12	15	500	0.055	0.09
BZG05B18	17.64	18	18.36	15	0.5	0.5	13	20	500	0.06	0.09
BZG05B20	19.60	20	20.40	10	0.5	0.5	15	24	600	0.06	0.09
BZG05B22	21.56	22	22.44	10	0.5	0.5	16	25	600	0.06	0.095
BZG05B24	23.52	24	24.48	10	0.5	0.5	18	25	600	0.06	0.095
BZG05B27	26.46	27	27.54	8	0.25	0.5	20	30	750	0.06	0.095
BZG05B30	29.40	30	30.60	8	0.25	0.5	22	30	1000	0.06	0.095
BZG05B33	32.34	33	33.66	8	0.25	0.5	24	35	1000	0.06	0.095
BZG05B36	35.28	36	36.72	8	0.25	0.5	27	40	1000	0.07	0.11
BZG05B39	38.22	39	39.78	6	0.25	0.5	30	50	1000	0.07	0.11
BZG05B43	42.14	43	43.86	6	0.25	0.5	33	50	1000	0.07	0.11
BZG05B47	46.06	47	47.94	4	0.25	0.5	36	90	1500	0.07	0.11
BZG05B51	49.98	51	52.02	4	0.25	0.5	39	115	1500	0.08	0.12
BZG05B56	54.88	56	57.12	4	0.25	0.5	43	120	2000	0.08	0.12
BZG05B62	60.76	62	63.24	4	0.25	0.5	47	125	2000	0.08	0.12
BZG05B68	66.64	68	69.36	4	0.25	0.5	51	130	2000	0.08	0.12
BZG05B75	73.50	75	76.50	4	0.25	0.5	56	135	2000	0.08	0.12
BZG05B82	80.36	82	83.64	2.7	0.25	0.5	62	200	3000	0.08	0.12
BZG05B91	89.18	91	92.82	2.7	0.25	0.5	68	250	3000	0.08	0.12
BZG05B100	98.00	100	102.00	2.7	0.25	0.5	75	350	3000	0.08	0.12

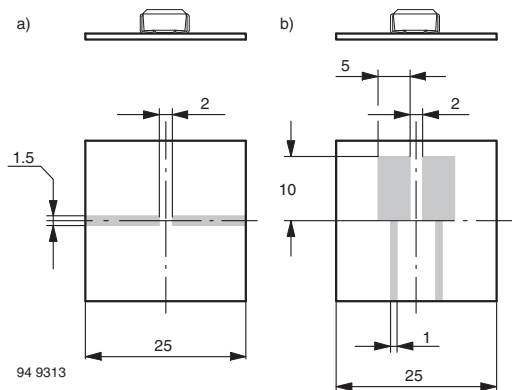
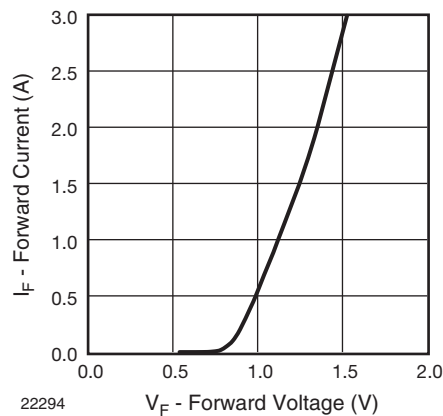
BASIC CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

Fig. 1 - Boards for R_{thJA} Definition (Copper Overlay 35 μ)


Fig. 3 - Forward Current vs. Forward Voltage

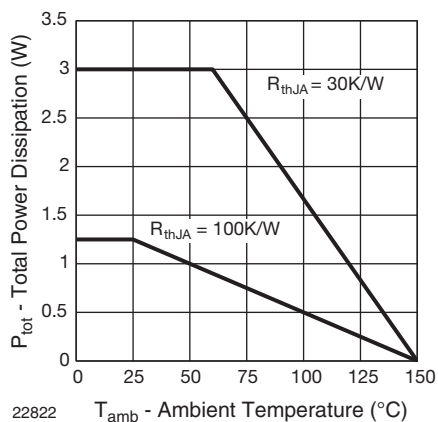


Fig. 2 - Typ. Total Power Dissipation vs. Ambient Temperature

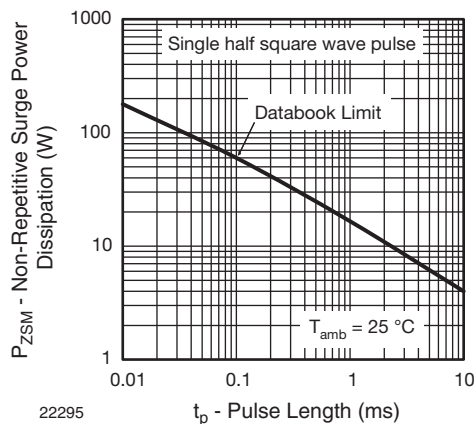


Fig. 4 - Non Repetitive Surge Power Dissipation vs. Pulse Length

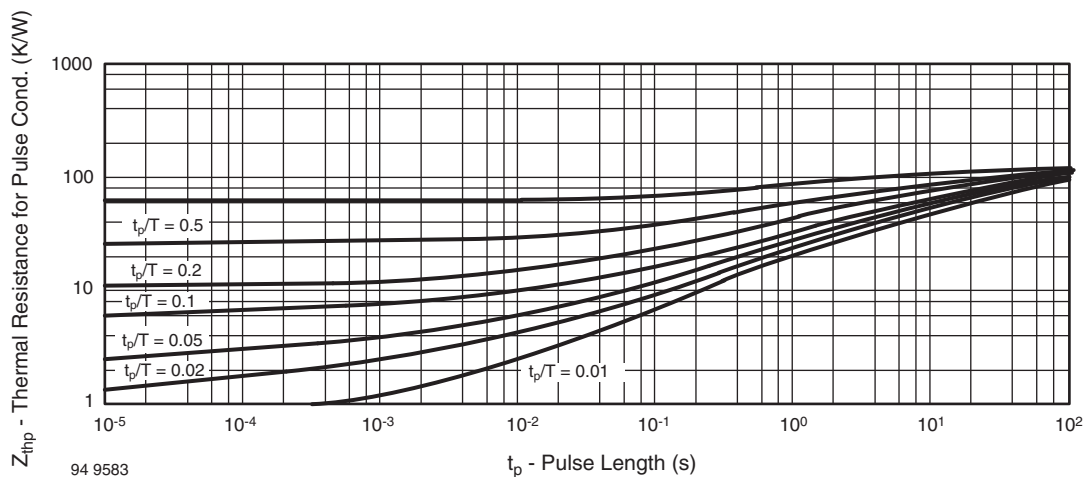
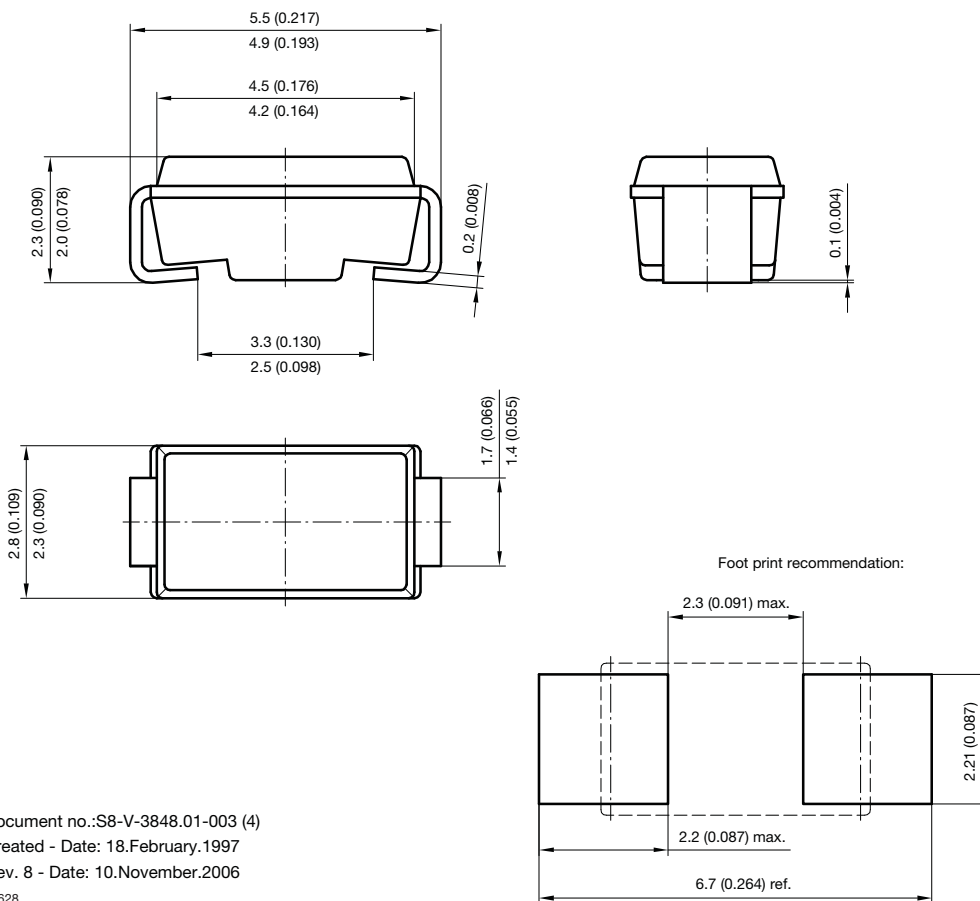


Fig. 5 - Thermal Response



PACKAGE DIMENSIONS in millimeters (inches): **DO-214AC**



Document no.:S8-V-3848.01-003 (4)
Created - Date: 18.February.1997
Rev. 8 - Date: 10.November.2006
19628



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.