
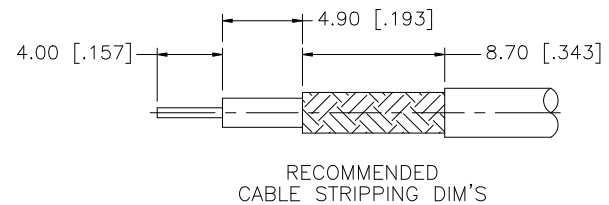
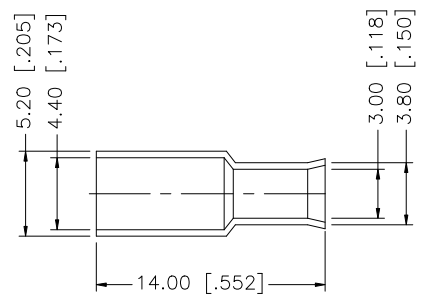




REV.	DATE	DESCRIPTION
NC	07/15/02	INITIAL RELEASE
A	05/01/04	UPDATE DRAWING FORMAT
B	12/10/07	ADD CABLE DESCRIPTION

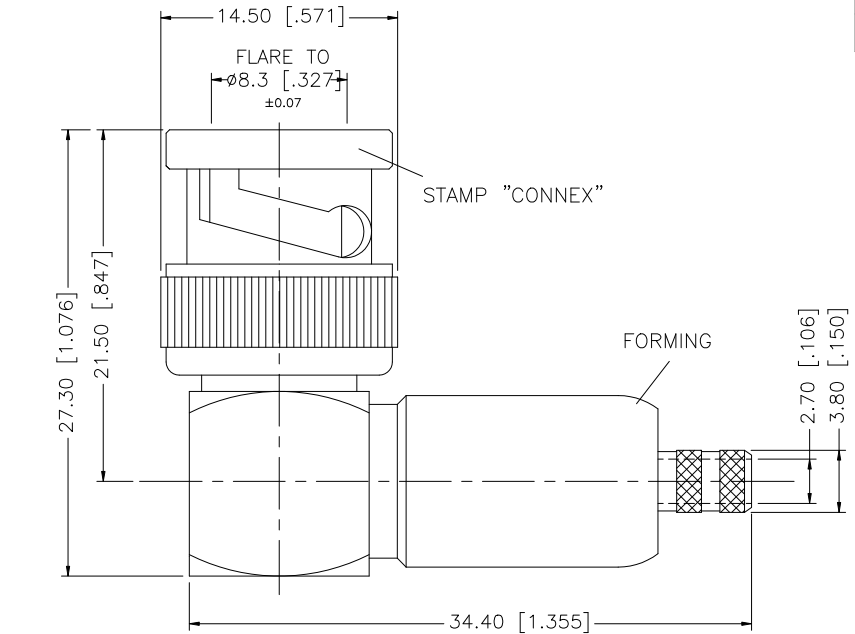

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
7	FERRULE	BRASS	NICKEL	1		DRAWN	G.R.S.	12/10/07							
6	SLEEVE	DELTRIN	NATURAL	1		CHECKED			PART DESCRIPTION BNC R/A CRIMP PLUG (FOR RG-174/316-U CABLE)						
5	CONTACT PIN	BRASS	GOLD	1		ISSUED									
4	CONTACT PIN	BRASS	GOLD	1		SHEET	1 OF 1		PART NO. 112198						
3	CONTACT PIN	PHOS. BRONZE	GOLD	1											
2	INSULATOR	DELTRIN	NATURAL	1		CAD FILE C:/112/112198.DWG			DWG. NO.	112198.DWG	REV.	B	SIZE	A	SCALE
1	BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112198](#)