
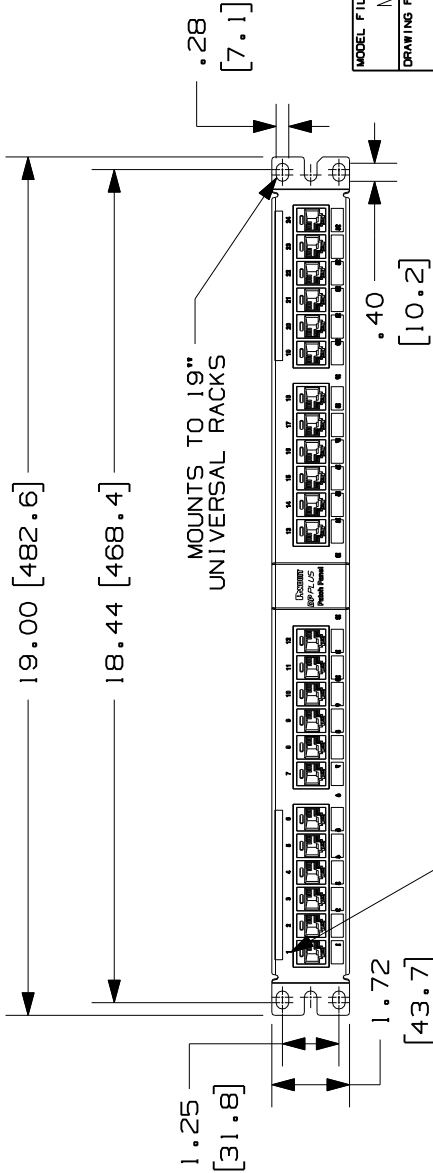


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	WEIGHT
DPA24688TGY	1.26 lb (1070.48 g)

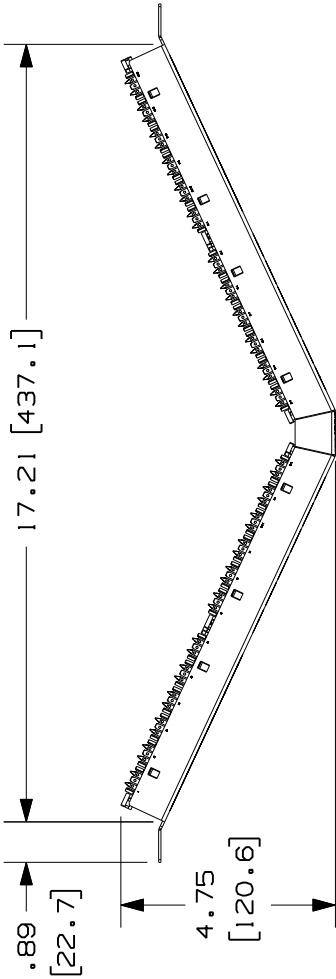

MOUNTS TO 19" UNIVERSAL RACKS

CID**-C & CIP**-C, PHONE OR DATA ICON LOCATES HERE. IDENTIFIES INDIVIDUAL PORT. OPTIONAL, NOT SUPPLIED.

NOTES:

- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
- MATERIAL: PANEL HOUSING: STEEL RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B
- RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
- 24 PORT ANGLED PATCH PANEL 8 POSITION 8 WIRE.
- THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
- FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) M6X1X15MM METRIC SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
- DIMENSIONS IN BRACKETS ARE IN METRIC.
- USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
- RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

MODEL FILENAME

M02088AC_1RU_24PORT_ANG_PANEL_ASSY_04

DRAWING FILENAME

M02479JD_DC240_00A

SIZE

A

DP6 PLUS 24 PORT ANGLED PATCH PANEL CUSTOMER DRAWING



PANDUITTM CORP.
TINLEY PARK, ILL 60477



ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) ±.03 (.XXX) ±.005
(.XX) ±.01 ANGLES ± 1°

THIRD ANGLE PROJECTION
DRAWN BY LZ
DATE 3-4-06
CHK'D

REVIEW DRAWING NUMBERS

1.1. NUMBER
PRODUCT SPEC
WORK INSTRUCTION
SCALE .25 : 1
PART NO.
SEE CHART
DRAWING NO.
02479-240

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	3-4-06	LZ		RELEASED TO PRODUCTION	02479-240				