

SPEC NO:

PART NO: DTS240062UDC-P5-SZ



CUI INC

PAGE NO: 1 of 5

UNIT: mm

DATE: 08/24/00

All information contained herein applies only to the above listed part number. Other versions of this part number with electrical or mechanical variations are available. Contact CUI Inc. for further assistance. 9615 SW Allen Blvd., Ste. 103, Beaverton OR 97005
800-275-4899 • 503-643-4899 • Fax: 503-643-6129 • www.cui.com

1.0 General Description

Model DTS240062UDC-P5-SZ is a universal type switch-mode power supply, operating at input voltage 90VAC to 264VAC and output voltage of 24VDC with 0.62A DC load.

2.0 Electric Characteristics

2.1 Input

No	ITEM	CONDITION	SPECIFICATION
1.	Input Connector		IEC320/C7-2 2PIN
2.	EMI		FCC/EN55022 Class B
3.	Input Voltage	*Rated Voltage	AC100V-240V
		*Vibration Range	AC90V-264V
4.	Frequency	*Rated	50-60Hz
		*Vibration	47-63Hz
5.	Input Current	Rated Current	Full load 600mA RMS Max
		No Load Current	At Rated Input 100mA Max
		Inrush Current	100V Input 30A Max
			240V Input 60A Max
6.	Input Power	100V-240V	45VA Max
7.	Efficiency	100V-240V	70% Min.



All information contained herein applies only to the above listed part number. Other versions of this part number with electrical or mechanical variations are available. Contact CUI Inc. for further assistance. 9615 SW Allen Blvd., Ste. 103, Beaverton OR 97005
800-275-4899 • 503-643-4899 • Fax: 503-643-6129 • www.cui.com

2.2 Output:

2.2.1 The Power supply described by this specification shall meet the following output, requirement give in the test circuit as show in 8.0

No	ITEM		CONDITION	SPECIFICATION
1.	Output Voltage	*Rated Output	0.62A Load	24VDC $\pm$ 5%
		*Out Regulation	AC90V-264V	
2.	Load Current	*Rated Current	100V-240V	0.62A
		*Min current	100V-240V	0mA
		*Max Current	100V-240V	0.62A
3.	Ripple Noise		100V-240V	240mV (p-p) Max.
4.	Over Voltage protection		Over28.4-25.6VDC	Shut off output
5.	Over Current Protection		Over Load Short Circuit	Shut off output & Auto reset

2.3 Dielectric Withstand voltage:

The unit shall withstand for 1 min. without break down , application of 3000VAC or 4240VDC between blades and output plug.

2.4 Insulation Resistance:

Between input and output and output plug shall not be less 100M ohm, Measured by 500VDC insulation resistance tester.

2.5 Temperature rise:

a)Rated input 230VAC 50Hz & rated load 0.62ADC

Enclosure:45°C Max. on ambient temperature of 25°C by use thermometer or thermocouple.

2.6 Humidity Test:

40°C $\pm$ 2°C relative humidity 90% RH for 96 hours, After keeping 30 minutes following insulation must be more than 5 M ohm.



All information contained herein applies only to the above listed part number. Other versions of this part number with electrical or mechanical variations are available. Contact CUI Inc. for further assistance. 9615 SW Allen Blvd., Ste. 103, Beaverton OR 97005
800-275-4899 • 503-643-4899 • Fax: 503-643-6129 • www.cui.com

2.7 Short circuit protection:

Shorting the DC output shall not cause damage to the power supply Removal of the short will allow the output to return to proper output voltage. Duration of the short time is 500milliseconds.

2.8 Output polarity: See Reference(1)

3.0 Safety approved: UL , CUL ,CE ,TUV

4.0 Meet EMI Standard

Design to meet FCC Class B

5.0 Mechanical Specification

5.1 AC Plug: IEC320/C7-2 2PIN

5.2 DC Output Cord:

Bending test: Life 1000 times 100% guarantee. Swings 120 from left to right
(60+60) Loading weight 500gm, 50 cycle/minute.

Pull test :DC cord and plug, weight6kg for 1 minute

5.3 Cord length and Output plug: See Reference (2)

5.4 Vibration Test:

Vibration Frequency 1500 cycle/minute, swings 2mm peak-peak 3 direction
(X-Y-Z) each 30 min.

5.5 Drop Test:

The unit shall comply with 2.4 without exposing live parts by creak or open of enclosure even the unit shall dropped from a high of 100cm onto a flat wooden board which is 30mm thickness.(For CE).

6.0 Normal Operating temperature & Humidity:

Normal operating temperature:10°C to 40°C

Humidity :20% to 80%

7.0 Storage Temperature & Humidity:

Storage Temperature:-10°C to 70°C

Humidity :10% -90% RH

SPEC NO:

PART NO: DTS240062UDC-P5-SZ




CUI INC

PAGE NO: 4 of 5


UNIT: mm

DATE: 08/24/00

All information contained herein applies only to the above listed part number. Other versions of this part number with electrical or mechanical variations are available. Contact CUI Inc. for further assistance. 9615 SW Allen Blvd., Ste. 103, Beaverton OR 97005
800-275-4899 • 503-643-4899 • Fax: 503-643-6129 • www.cui.com

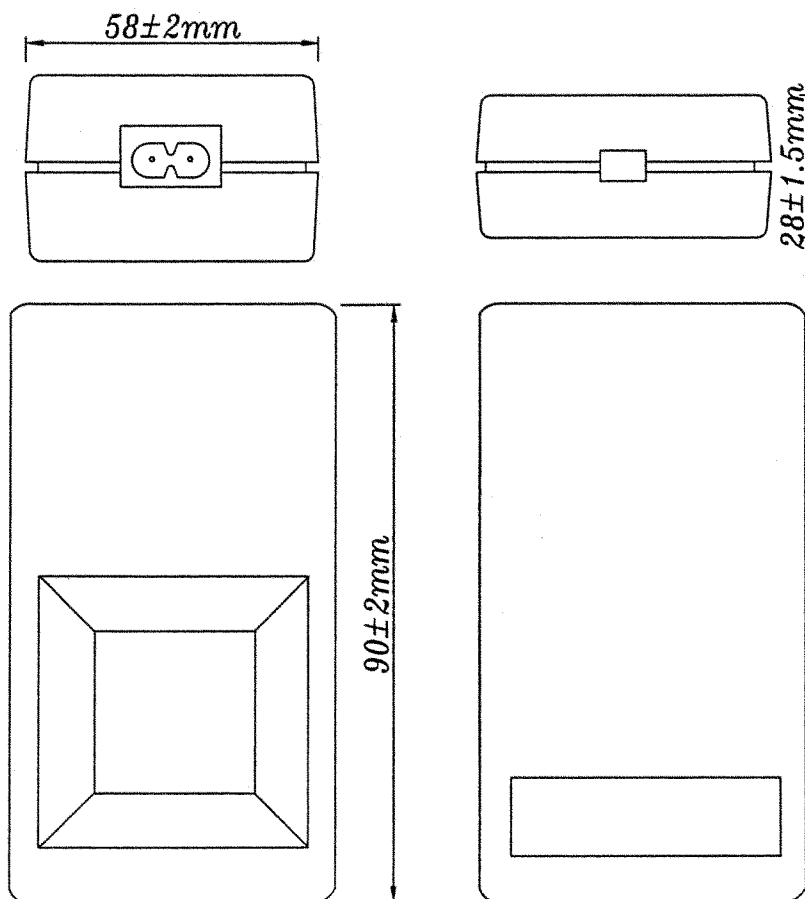

Test Circuit

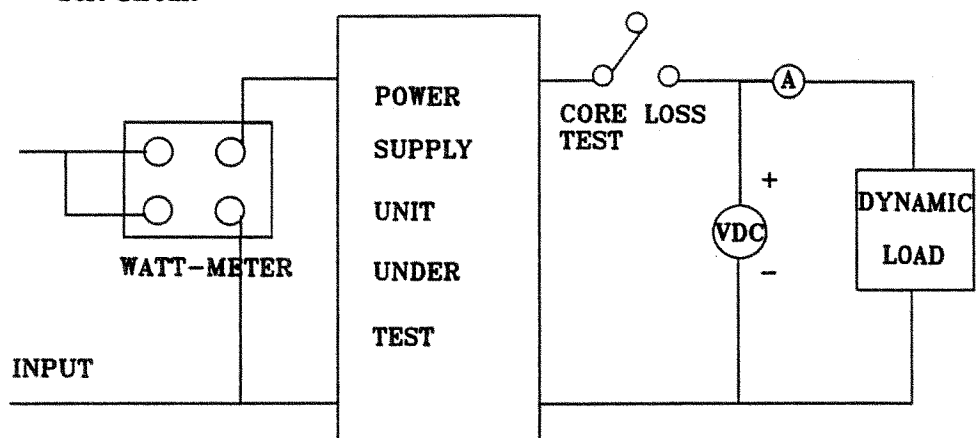

SPEC NO:

PART NO: DTS240062UDC-P5-SZ



CUI INC


PAGE NO: 5 of 5

UNIT: mm


DATE: 08/24/00

All information contained herein applies only to the above listed part number. Other versions of this part number with electrical or mechanical variations are available. Contact CUI Inc. for further assistance. 9615 SW Allen Blvd., Ste. 103, Beaverton OR 97005
800-275-4899 • 503-643-4899 • Fax: 503-643-6129 • www.cui.com

CABLE-135

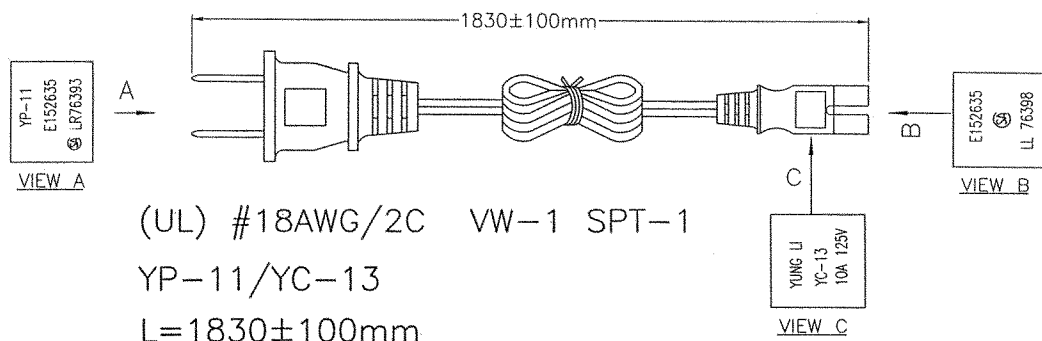

CABLE-206

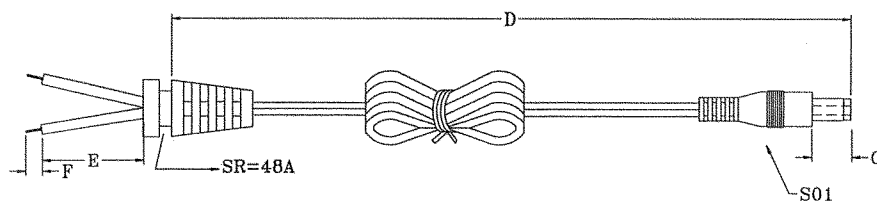

AWG	A	B	C	D	E	F	DATE	SING
20/2C	5.5±0.1mm	2.1±0.1mm	9.5±0.5mm	1830mm/+200/-0	30±5mm	10±5mm		