



H/HM Versions Only
E176177

EC3A SERIES

3 WATT 2:1 INPUT RANGE

DC-DC CONVERTERS



FEATURES

- * 3W Isolated Output
- * 24-Pin DIP Package
- * Efficiency to 82%
- * 2:1 Input Range
- * Regulated Outputs
- * Pi Input Filter
- * Continuous Short Circuit Protection
- * UL60950-1 Approval for H/HM Versions only

MODEL NUMBER	INPUT VOLTAGE ⁽¹⁾	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF. ⁽²⁾	CAPACITOR LOAD MAX.
				NO LOAD	FULL LOAD		
EC3A01	4.5-6 VDC	5 VDC	600 mA	15 mA	800 mA	75	2200uF
EC3A02	4.5-6 VDC	12 VDC	250 mA	15 mA	759 mA	79	2200uF
EC3A03	4.5-6 VDC	15 VDC	200 mA	15 mA	779 mA	77	2200uF
EC3A04	4.5-6 VDC	±5 VDC	±300 mA	25 mA	779 mA	77	1000uF
EC3A05	4.5-6 VDC	±12 VDC	±125 mA	25 mA	789 mA	76	1000uF
EC3A06	4.5-6 VDC	±15 VDC	±100 mA	25 mA	800 mA	75	1000uF
EC3A07	4.5-6 VDC	3.3 VDC	600 mA	15 mA	582 mA	68	2200uF
EC3A11	9-18 VDC	5 VDC	600 mA	7.5 mA	325 mA	77	2200uF
EC3A12	9-18 VDC	12 VDC	250 mA	7.5 mA	313 mA	80	2200uF
EC3A13	9-18 VDC	15 VDC	200 mA	7.5 mA	316 mA	79	2200uF
EC3A14	9-18 VDC	±5 VDC	±300 mA	12 mA	325 mA	77	1000uF
EC3A15	9-18 VDC	±12 VDC	±125 mA	12 mA	325 mA	77	1000uF
EC3A16	9-18 VDC	±15 VDC	±100 mA	12 mA	316 mA	79	1000uF
EC3A17	9-18 VDC	3.3 VDC	600 mA	7.5 mA	229 mA	72	2200uF
EC3A21	18-36 VDC	5 VDC	600 mA	5 mA	158 mA	79	2200uF
EC3A22	18-36 VDC	12 VDC	250 mA	5 mA	156 mA	80	2200uF
EC3A23	18-36 VDC	15 VDC	200 mA	5 mA	152 mA	82	2200uF
EC3A24	18-36 VDC	±5 VDC	±300 mA	7.5 mA	162 mA	77	1000uF
EC3A25	18-36 VDC	±12 VDC	±125 mA	7.5 mA	158 mA	79	1000uF
EC3A26	18-36 VDC	±15 VDC	±100 mA	7.5 mA	154 mA	81	1000uF
EC3A27	18-36 VDC	3.3 VDC	600 mA	5 mA	111 mA	74	2200uF
EC3A31	36-72 VDC	5 VDC	600 mA	2 mA	78 mA	79	2200uF
EC3A32	36-72 VDC	12 VDC	250 mA	2 mA	78 mA	80	2200uF
EC3A33	36-72 VDC	15 VDC	200 mA	2 mA	78 mA	80	2200uF
EC3A34	36-72 VDC	±5 VDC	±300 mA	3 mA	80 mA	78	1000uF
EC3A35	36-72 VDC	±12 VDC	±125 mA	3 mA	80 mA	78	1000uF
EC3A36	36-72 VDC	±15 VDC	±100 mA	3 mA	80 mA	78	1000uF
EC3A37	36-72 VDC	3.3 VDC	600 mA	3 mA	57 mA	72	2200uF

NOTE:

1. Nominal input voltage is 5, 12, 24 or 48VDC.
2. Typical value at nominal input voltage and full load.

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	5V	4.5-6V
	12V	9-18V
	24V	18-36V
	48V	36-72V
Input Surge Voltage (100ms max.)	5V	10Vdc max.
	12V	25Vdc max.
	24V	50Vdc max.
	48V	100Vdc max.
Input Filter	Pi Type	

OUTPUT SPECIFICATIONS:

Voltage Accuracy	±2.0% max.	
Voltage Balance (Dual)	±1.0% max.	
Temperature Coefficient	±0.05%/°C	
Ripple & Noise, 20MHz BW	3.3V/5V	100mV pk-pk, max.
	12V/15V	1% pk-pk max.
Short Circuit Protection	Continuous	
Line Regulation	Single/Dual (note1)	±0.5% max.
Load Regulation	Single (note2)	±0.5% max.
	Dual (note3)	±1.0% max.


NOTE:

1. Measured from high line to low line.
2. Measured from full load to 10% load.
3. Measured from full load to 1/4 load.
4. Maximum case temperature under any operating condition should not be exceed 95°C (Plastic Case), 100°C (Copper Case).

GENERAL SPECIFICATIONS:


Efficiency	See Table	
Isolation Voltage:		
500 VDC min.	Standard Models	
3K VDC min.	(Non-Conductive Black Plastic Only) Suffix "H" Models	
1.5K VDC min.	Suffix "HM" Models	
Isolation Resistance	10 ⁸ ohm min.	
Switching Frequency	100KHz min.	
Operating Ambient Temperature Range	-25°C to +71°C	
Power de-rating Curve	see Figure1	
Case Temperature (note4)	Plastic/Copper case ... 95°C/100°C max.	
Cooling	Natural Convection	
Storage Temperature Range	-40°C to +100°C	
Humidity	95% RH max. Non condensing	
MTBF	MIL-STD-217F 2000Khrs typ.	
Dimensions	DIP	1.25×0.80×0.40 inches(31.8×20.3×10.2 mm)
	SMD	1.25×0.80×0.45 inches(31.8×20.3×11.4 mm)
Case Material:		
Standard Models	Non-Conductive Black Plastic	
Suffix "M" Models	Black Coated Copper with Non-conductive Base	
Weight	12.5g	

Figure1. Typical Derating curve for Natural Convection

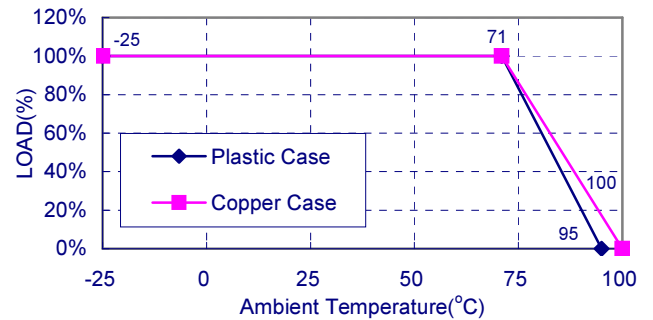

Case A Dimensions:

NOTE: Pin Size is 0.02 ±0.002 Inch (0.5±0.05 mm) DIA
 All Dimensions In Inches (mm)
 Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010
 Millimeters: X.X= ±0.5 , X.XX=±0.25

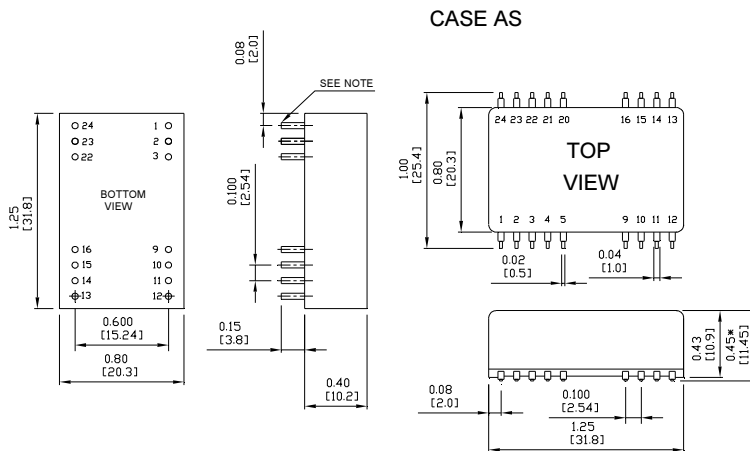

CASE AS

PIN CONNECTION									
500 VDC					1.5K & 3K VDC				
Pin	Single Output		Dual Output		Pin	Single Output		Dual Output	
	DIP	SMD	DIP	SMD		DIP	SMD	DIP	SMD
1,24	+V Input		+V Input		1,24	NP	NC	NP	NC
2,23	NC		-V Output		2,3	-V Input		-V Input	
3,22	NC		Common		4,5	NP	NC	NP	NC
4	NP	NC	NP	NC	9	NC		Common	
5	NP	NC	NP	NC	10,15	NC		NC	
9	NP	NC	NP	NC	11	NC		-V Output	
10,15	-V Output		Common		12,13	NP	NC	NP	NC
11,14	+V Output		+V Output		14	+V Output		+V Output	
12,13	-V Input		-V Input		16	-V Output		Common	
16	NP	NC	NP	NC	20,21	NP	NC	NP	NC
20,21	NP	NC	NP	NC	22,23	+V Input		+V Input	

* NP-NO PIN
 * NC-NO CONNECTION WITH PIN

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cincon:

[EC3A02H](#) [EC3A34H](#) [EC3A35H](#) [EC3AE12M](#) [EC3AE45M](#) [EC3AE44M](#) [EC3AE43M](#) [EC3AE32M](#) [EC3AE33M](#)
[EC3AE31M](#) [EC3AE34M](#) [EC3AE35M](#) [EC3AE03M](#) [EC3AE01M](#) [EC3AE02M](#) [EC3AE04M](#) [EC3AE05M](#) [EC3AE11M](#)
[EC3AE13M](#) [EC3AE14M](#) [EC3AE15M](#) [EC3AE21M](#) [EC3AE22M](#) [EC3AE23M](#) [EC3AE24M](#) [EC3AE25M](#) [EC3AE41M](#)
[EC3AE42M](#) [EC3A01](#) [EC3A03](#) [EC3A04](#) [EC3A05](#) [EC3A06](#) [EC3A07](#) [EC3A11](#) [EC3A12](#) [EC3A13](#) [EC3A14](#) [EC3A15](#)
[EC3A16](#) [EC3A17](#) [EC3A21](#) [EC3A22](#) [EC3A23](#) [EC3A24](#) [EC3A25](#) [EC3A26](#) [EC3A27](#) [EC3A31](#) [EC3A32](#) [EC3A33](#)
[EC3A34](#) [EC3A35](#) [EC3A36](#) [EC3A37](#) [EC3AE41M-S](#) [EC3A32M](#) [EC3A03M](#) [EC3AE32M-S](#) [EC3AE12M-S](#)
[EC3AE21M-S](#) [EC3A34M](#) [EC3AE24M-S](#) [EC3AE15M-S](#) [EC3A14M](#) [EC3A16M](#) [EC3A33M](#) [EC3A22M](#) [EC3AE11M-S](#)
[EC3A25M](#) [EC3A23M](#) [EC3A05M](#) [EC3A17M](#) [EC3A15M](#) [EC3A03MS](#) [EC3A33MS](#) [EC3A25MS](#) [EC3A17MS](#)
[EC3A15MS](#) [EC3A23MS](#) [EC3A32MS](#) [EC3A14MS](#) [EC3A26MS](#) [EC3A37MS](#) [EC3A12MS](#) [EC3A22MS](#) [EC3A16MS](#)
[EC3A04MS](#) [EC3A35MS](#) [EC3A24MS](#) [EC3A06MS](#) [EC3A13MS](#) [EC3A11MS](#) [EC3A27MS](#) [EC3A02MS](#) [EC3A05MS](#)
[EC3A21MS](#) [EC3A31MS](#) [EC3A07MS](#) [EC3A01MS](#)