

- Gapped Transformer •
- 1500 Vrms Isolation •
- Switching Frequency : 100 KHz •


Primary Specification

Inductance ($\mu\text{H} \pm 20\%$) @ 0 Adc	DCR (Ω Max.)	
@ 100 KHz, .1 Vrms		
47	0.075	0.650
Pins 1-2	Pins 1-2	Pins 5-6


Magnetic Design @ V out : -67V • I out : .33Adc • V in : -24V • I in : 1.17Adc

Leakage Inductance (μH Max.)	Inductance Change @ 1.77 Adc	Inductance Change @ 1.17 Adc	Core Loss (mW)	Turns Ratio	Temperature Rise ($^{\circ}\text{C}$ Max.)
@ 100 KHz, .1 Vrms					
.6	5% Max	3% Max	145	1 : 4	27
Pins 1-2 w/ 5-6 shorted				Pins 1-2 : Pins 5-6	

Package

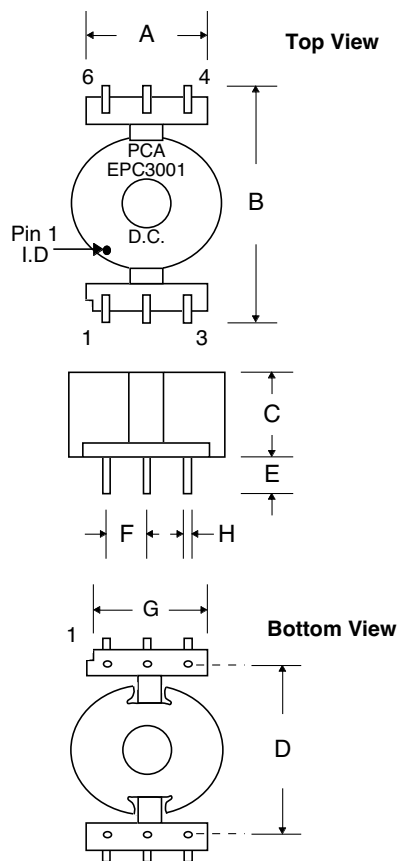

Schematic



Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	---	.768	---	---	19.50	---
B	---	.758	---	---	29.85	---
C	---	.441	---	---	11.20	---
D	---	---	.846	---	---	21.50
E	---	---	.118	---	---	3.00
F	---	---	.140	---	---	3.55
G	---	.402	---	---	10.20	---