


Thick Film Chip Resistors 01005, 0201, 0402, 0603, 0805, 1206, 1210, 1812, 2010, 2512

Type: **ERJ XG, 1G, 2G, 3G, 6G, 8G,
14, 12, 12Z, 1T**

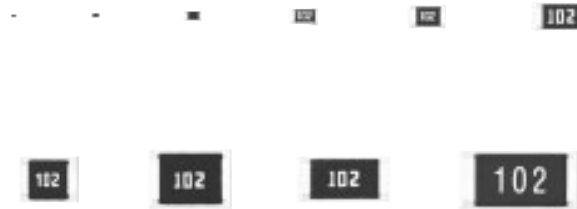

■ Features

- Small size and lightweight
- High reliability
Metal glaze thick film resistive element and three layers of electrodes
- Compatible with placement machines
Taping packaging available
- Suitable for both reflow and flow soldering
- Reference Standards
IEC 60115-8, JIS C 5201-8, EIAJ RC-2134B

■ Packaging Methods Please see Pages 40 to 43

■ Recommended Land Pattern Please see Pages 44 to 45

■ Recommended Soldering Conditions Please see Page 46

■ Safety Precautions Please see Page 47

■ Explanation of Part Numbers

- ERJXGN, 1GN, 2GE, 3GE, 6GE, 8GE, 14, 12, 12Z, 1T Series, $\pm 5\%$ type


	1	2	3	4	5	6	7	8	9	10	11	12
	E	R	J	3	G	E	Y	J	1	0	2	V

Product Code	Size, Power Rating		Marking		Resistance Tolerance		Packaging Methods		
Thick Film Chip Resistors	Type : inch	Power R.	Code	Marking	Code	Tolerance	Code	Packaging	Type
	XGN : 01005	0.031 W			J	± 5 %	Y	Pressed Carrier Taping W8P2, 20,000 pcs.	ERJXGN
	1GN : 0201	0.05 W	Y	Value Marking on black side	0	Jumper	U	Embossed Carrier Taping W4P1, 40,000 pcs.	
	2GE : 0402	0.1 W	*Nil	No marking			C	Pressed Carrier Taping 2 mm pitch, 15,000 pcs.	ERJ1GN
	3GE : 0603	0.1 W	Resistance Value The first two digits are significant figures of resistance and the third one denotes number of zeros following. Decimal Point is expressed by R as 4.7 = 4R7. Jumper is expressed by R00.				X	Punched Carrier Taping 2 mm pitch, 10,000 pcs.	ERJ2GE
	6GE : 0805	0.125 W					Y	Punched Carrier Taping 2 mm pitch, 20,000 pcs.	
	8GE : 1206	0.25 W					V	Punched Carrier Taping 4 mm pitch, 5,000 pcs.	ERJ6GE
	14 : 1210	0.5 W					U	Embossed Carrier Taping 4 mm pitch, 5,000 pcs.	ERJ8GE
	12Z : 2010	0.75 W						Embossed Carrier Taping 4 mm pitch, 4,000 pcs.	ERJ14
	1T : 2512	1 W						ERJ12	ERJ12Z
									ERJ1T


* When omitted, the rest of the P/N factors shall be moved up respectively.
(Only XGN, 1GN, 2GE type)

* When omitted, the rest of the P/N factors shall be moved up respectively.
(Only XGN, 1GN, 2GE type)

Construction

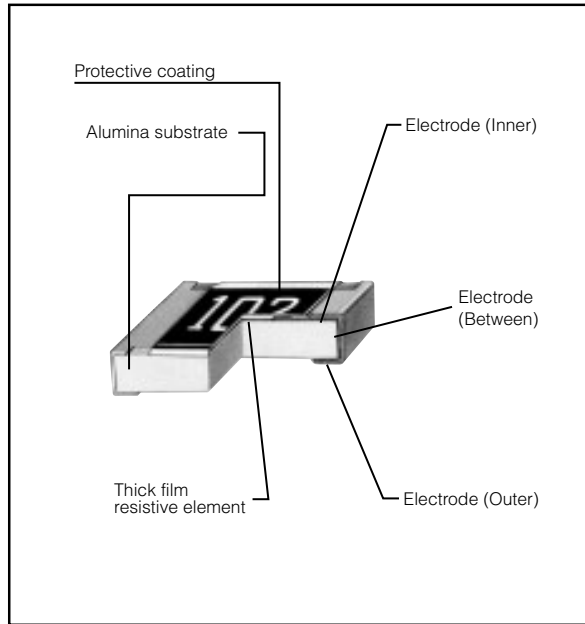

Dimensions in mm (not to scale)



Type (inch size)	Dimensions (mm)					Mass (Weight) (g/1000 pcs.)
	L	W	a	b	t	
ERJXG (01005)	0.40 $\pm$ 0.02	0.20 $\pm$ 0.02	0.10 $\pm$ 0.03	0.10 $\pm$ 0.03	0.13 $\pm$ 0.02	0.04
ERJ1G (0201)	0.60 $\pm$ 0.03	0.30 $\pm$ 0.03	0.10 $\pm$ 0.05	0.15 $\pm$ 0.05	0.23 $\pm$ 0.03	0.15
ERJ2G (0402)	1.00 $\pm$ 0.05	0.50 $\pm$ 0.05	0.20 $\pm$ 0.10	0.25 $\pm$ 0.05	0.35 $\pm$ 0.05	0.8
ERJ3G (0603)	1.60 $\pm$ 0.15	0.80 $\pm$ 0.15	0.30 $\pm$ 0.20	0.30 $\pm$ 0.15	0.45 $\pm$ 0.10	2
ERJ6G (0805)	2.00 $\pm$ 0.20	1.25 $\pm$ 0.10	0.40 $\pm$ 0.20	0.40 $\pm$ 0.20	0.60 $\pm$ 0.10	4
ERJ8G (1206)	3.20 $\pm$ 0.05	1.60 $\pm$ 0.05	0.50 $\pm$ 0.20	0.50 $\pm$ 0.20	0.60 $\pm$ 0.10	10
ERJ14 (1210)	3.20 $\pm$ 0.20	2.50 $\pm$ 0.20	0.50 $\pm$ 0.20	0.50 $\pm$ 0.20	0.60 $\pm$ 0.10	16
ERJ12 (1812)	4.50 $\pm$ 0.20	3.20 $\pm$ 0.20	0.50 $\pm$ 0.20	0.50 $\pm$ 0.20	0.60 $\pm$ 0.10	27
ERJ12Z (2010)	5.00 $\pm$ 0.20	2.50 $\pm$ 0.20	0.60 $\pm$ 0.20	0.60 $\pm$ 0.20	0.60 $\pm$ 0.10	27
ERJ1T (2512)	6.40 $\pm$ 0.20	3.20 $\pm$ 0.20	0.65 $\pm$ 0.20	0.60 $\pm$ 0.20	0.60 $\pm$ 0.10	45

Ratings

<For Resistor>

Type (inch size)	Power Rating at 70 °C (W)	Limiting Element Voltage ⁽¹⁾ (V)	Maximum Overload Voltage ⁽²⁾ (V)	Resistance Tolerance (%)	Resistance Range (Ω)	T.C.R. ($\times 10^{-6}/^{\circ}\text{C}$)	Category Temperature Range ($^{\circ}\text{C}$)
ERJXG (01005)	0.031	15	30	± 5	4.7 to 1 M (E24)	<10 Ω : -100 to +600 10 Ω to 100 Ω : ± 300 100 Ω <: ± 200	-55 to +125
ERJ1G (0201)	0.05	25	50	± 5	1 to 10 M (E24)	<10 Ω : -100 to +600	-55 to +125
ERJ2G (0402)	0.1	50	100	± 5	1 to 10 M (E24)		-55 to +155
ERJ3G (0603)	0.1	75	150	± 5	1 to 10 M (E24)		-55 to +155
ERJ6G (0805)	0.125	150	200	± 5	1 to 10 M (E24)		-55 to +155
ERJ8G (1206)	0.25	200	400	± 5	1 to 10 M (E24)	10 Ω to 1 M Ω : ± 200	-55 to +155
ERJ14 (1210)	0.5	200	400	± 5	1 to 10 M (E24)		-55 to +155
ERJ12 (1812)	0.75	200	500	± 5	1 to 10 M (E24)		-55 to +155
ERJ12Z (2010)	0.75	200	500	± 5	1 to 10 M (E24)	1 M Ω <: -400 to +150	-55 to +155
ERJ1T (2512)	1	200	500	± 5	1 to 1 M (E24)		-55 to +155

(1) Rated Continuous Working Voltage (RCWV) shall be determined from $\text{RCWV} = \sqrt{\text{Power Rating} \times \text{Resistance Values}}$, or Limiting Element Voltage listed above, whichever less.


(2) Overload (Short-time Overload) Test Voltage (SOTV) shall be determined from $\text{SOTV} = 2.5 \times \text{Power Rating}$ or max. Overload Voltage listed above whichever less.

<For Jumper>

Type (inch size)	Rated Current (A)	Maximum Overload Current (A)
ERJXG (01005)	0.5	1
ERJ1G (0201)		
ERJ2G (0402)		
ERJ3G (0603)	1	2
ERJ6G (0805)		
ERJ8G (1206)	2	4
ERJ14 (1210)		
ERJ12 (1812)		
ERJ12Z (2010)		
ERJ1T (2512)		

Power Derating Curve

For resistors operated in ambient temperatures above 70 °C, power rating shall be derated in accordance with the figure below.

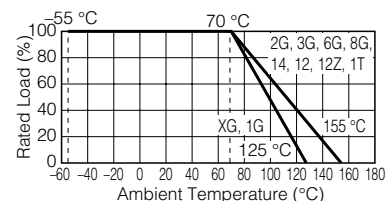

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Sep. 2010