


ET Series

Sealed Subminiature Toggle Switches



Features/Benefits

- Sealed against solder and cleaning process contaminants
- ESD protection available
- Thru-hole and surface mount models
- Compact size and small footprint save PCB space
- RoHS compliant models available

Typical Applications

- Hand-held telecommunications
- Instrumentation
- Medical equipment

Specifications

CONTACT RATING: B contact material: 0.4 VA max. @ 20 V AC or DC max. See page F-35 for additional ratings.

ELECTRICAL LIFE: ETX1 models: 60,000 make-and-break cycles at full load. All other models: 30,000 cycles.

CONTACT RESISTANCE: Below 20 m Ω typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts.

INSULATION RESISTANCE: $10^9 \Omega$ min.

ELECTROSTATIC DISCHARGE (ESD) RESISTANT OPTION:
M3 & S3 insulating actuator only: 9,000 V DC min. @ sea level, actuator to terminals. F1 conductive bushing only: Dissipates up to 20,000 V DC from actuator to ground. M3 & S3 actuator and F1 bushing options are not recommended for use together.

DIELECTRIC STRENGTH: 1000 Vrms min. @ sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

SOLDERABILITY: Per MIL-STD-202F method 208D, or EIA RS-186E method 9 (1 hour steam aging).

DEGREE OF PROTECTION: IP57; Protection against harmful dust deposit, full-scale voltage protection, temporary immersion.

PACKAGING: Surface mount switches are shipped in tape and reel packaging, see page F-36 for drawings and reel information.

Materials

CASE & BUSHING: Glass filled nylon 6/6, flame retardant, heat stabilized (UL 94V-0) or glass filled 4/6 nylon, flame retardant, heat stabilized (UL 94V-0). F1 conductive bushing option is impregnated with carbon fibers.

ACTUATOR: M3 & S3 anti-static actuator: Nylon 4/6, black standard (UL 94V-0). All other actuators: Brass, chrome plated. Internal o-ring seal standard with all actuators.

SWITCH SUPPORT: Brass, tin plated.

CONTACTS & TERMINALS: B contact material: Copper alloy, with gold plate over nickel plate. Q contact material: Copper alloy, silver plated. See F-35 for additional contact materials.

TERMINAL SEAL: Epoxy.

NOTE: Any models supplied with Q, B, G, P or R contact material are RoHS compliant and compatible.

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages F-31 thru F-36. For additional options not shown in catalog, consult our Customer Service Center. All models are process sealed to withstand machine soldering temperatures and pressure wash cleaning methods.

Switch Function

ET01 SP, On-None-On
ET02 SPST, Off-None-On
ET03 SP, On-Off-On
ET05 SP, Mom.-Off-Mom.
ET07 SP, On-Off-Mom.
ET08 SP, On-None-Mom.
ET21 DP, On-None-On
ET23 DP, On-Off-On
ET24 DP, On-On-On
ET25 DP, Mom.-Off-Mom.
ET27 DP, On-Off-Mom.
ET28 DP, On-None-Mom.

Actuator

M .240" high
M3 Plastic, anti-static, .240" high
S .400" high
L .320" high
S1 .540" high

Bushing

D1 .177" High, Unthreaded
F1 .177" high, unthreaded, ESD conductive

Terminations

A Right angle, PC thru-hole
AV Vertical right angle, PC thru-hole
C PC Thru-hole
SA Right angle, surface mount
SA1 Right angle, surface mount rear-facing
V3 Vertical mount, V-bracket
AV3 Vertical right angle, snap-in, PC thru-hole
V31 Vertical mount, V-bracket, snap-in
W Wire wrap

Contact Material

B Gold
P Gold, matte tin
Q Silver
S Silver/matte-tin
G Gold over silver
R Gold over silver, matte-tin

Seal

E Epoxy

Plastic Actuator Color

NONE No actuator color
2 Black
1 White



Toggle




Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change


ET Series

Sealed Subminiature Toggle Switches


SWITCH FUNCTION

NO. POLES	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS			SCHEMATIC	
		POS. 1	POS. 2	POS. 3	POS. 1	POS. 2	POS. 3		
									
		C&K marking on opposite side			C&K marking on opposite side				
SP	ET01	ON	NONE	ON	2-3	N/A	2-1		
	ET03	ON	OFF	ON	2-3	OPEN	2-1		
	ET05	MOM.	OFF	MOM.					
	ET07	ON	OFF	MOM.					
	ET08	ON	NONE	MOM.	2-3	N/A	2-1		SPDT
	ET02	OFF	NONE	ON	OPEN	N/A	3-1		SPST


SPDT

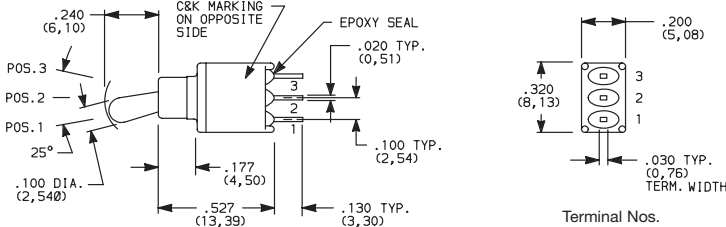

Part number shown: ET01MD1CBE ET02 Models: Omit terminal 2

DP	ET21	ON	NONE	ON	2-3,5-6	N/A	2-1,5-4		
	ET23	ON	OFF	ON	2-3,5-6	OPEN	2-1,5-4		
	ET25	MOM.	OFF	MOM.					
	ET27	ON	OFF	MOM.					
	ET28	ON	NONE	MOM.	2-3,5-6	N/A	2-1,5-4		DPDT
	ET24**	ON	ON	ON	2-3,5-6	2-3,5-4	2-1,5-4		

DPDT

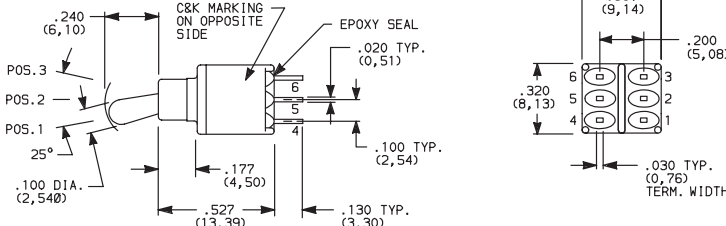


Part number shown: ET21MD1CBE

MOM. = Momentary


** Wiring for 3-way switch, see Section N.

All models with all options (except M3 actuator) when ordered with G, L, R or Q contact material except with F1 conductive bushing.



Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

www.ck-components.com



Toggle

ET Series

Sealed Subminiature Toggle Switches

ACTUATOR

ACTUATOR COLOR

M

.240" HIGH

Standard with A, AV, V3 & V31 terminations.

M3

PLASTIC, ANTISTATIC,
.240" HIGH

Material: Nylon 4/6 (UL 94V-0), black standard.
Static resistance: 9,000 V DC min. @ sea level,
actuator to terminals. Not available with F1
conductive bushing option. Not UL approved.

S

.400" HIGH

Standard with C or W terminations.

L

.320" HIGH

S1

.540" HIGH

OPTION CODE	PLASTIC ACTUATOR COLOR
(NONE)	BLACK (M3 & S3 only)
1	WHITE (M3 & S3 only)

NOTE: All actuators have chrome finish (except M3 & S3).

BUSHING


D1

.177" HIGH, UNTHREADED

F1

ESD, CONDUCTIVE BUSHING
UNTHREADED, .177" HIGH

F1 bushing is not UL approved



NOTE: ESD protection depends on proper grounding of switch support bracket. F1 conductive bushing option is impregnated with carbon fibers; dissipates electrostatic discharge (ESD) up to 20,000 V from actuator to ground. Available with all metal actuator options and A, AV, AV3, V3 and V31 termination options only. Internal actuator o-ring seal standard.

TERMINATIONS

C

PC THRU-HOLE

SP

PC MOUNTING

SP

ET02 – omit center hole.

DP

DP

Not available with F1 conductive bushing.

W

WIRE WRAP

SP

SP and DP

DP

Not available with F1 conductive bushing.

Third Angle Projection

Toggle

F

Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

www.ck-components.com

F-32



ET Series Sealed Subminiature Toggle Switches

TERMINATIONS


A RIGHT ANGLE, PC THRU-HOLE

ET01MD1ABE
Horizontal Actuation
SPDT

Actuator Shown In Pos. 1

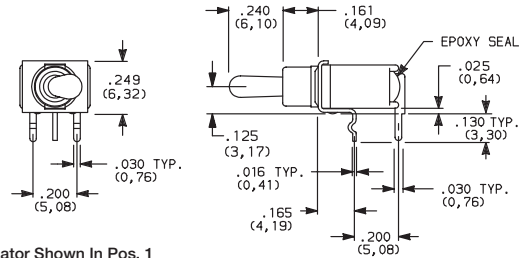

PC MOUNTING





Not available with ET02 model.


A RIGHT ANGLE, PC THRU-HOLE

ET21MD1ABE
Horizontal Actuation
DPDT

Actuator Shown In Pos. 1

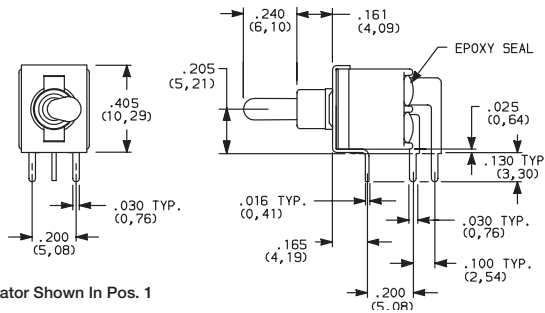



PC MOUNTING




AV VERTICAL RIGHT ANGLE, PC THRU-HOLE

ET01MD1AVBE
Vertical Actuation
SPDT

Actuator Shown In Pos. 1

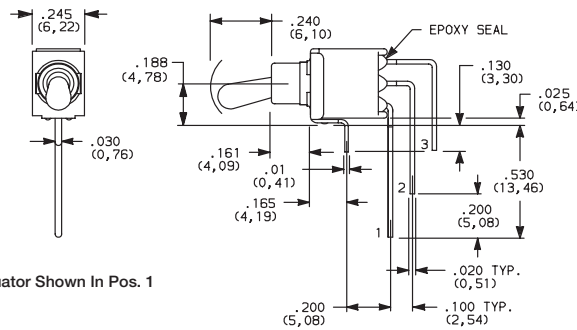

PC MOUNTING





ET02 - omit terminal 2.

NOTE: Terminal bend radii and lead-in manufacturing option.


AV VERTICAL RIGHT ANGLE, PC THRU-HOLE

ET21MD1AVBE
Vertical Actuation
DPDT

Actuator Shown In Pos. 1

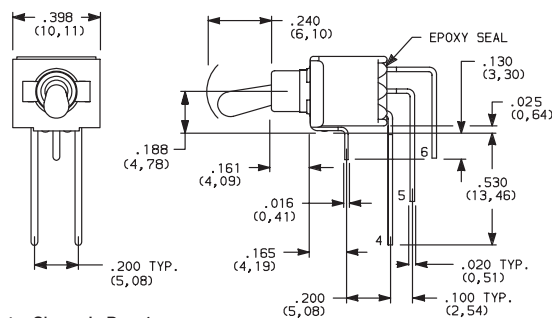

PC MOUNTING



NOTE: Terminal bend radii and lead-in manufacturing option.




C&K




ET Series Sealed Subminiature Toggle Switches

TERMINATIONS

AV3 VERTICAL RIGHT ANGLE, SNAP-IN, PC THRU-HOLE

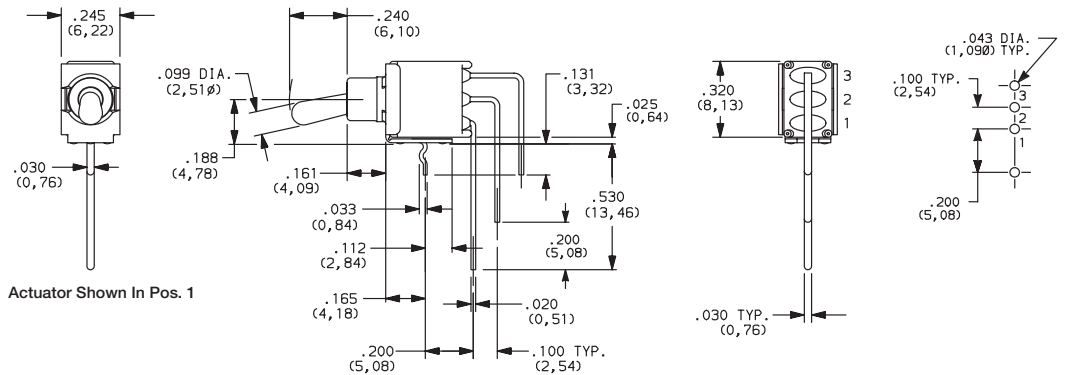


SA RIGHT ANGLE, SURFACE MOUNT

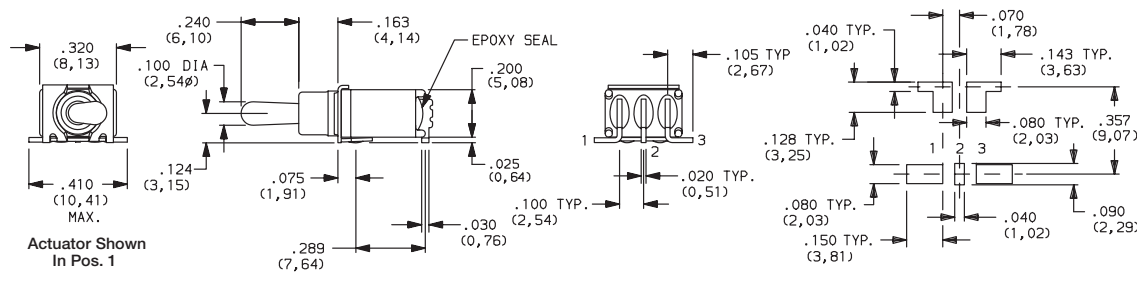


Not available with S and S1 actuators. Standard with tape & reel packaging. See page F-36.

SA1 RIGHT ANGLE, SURFACE MOUNT

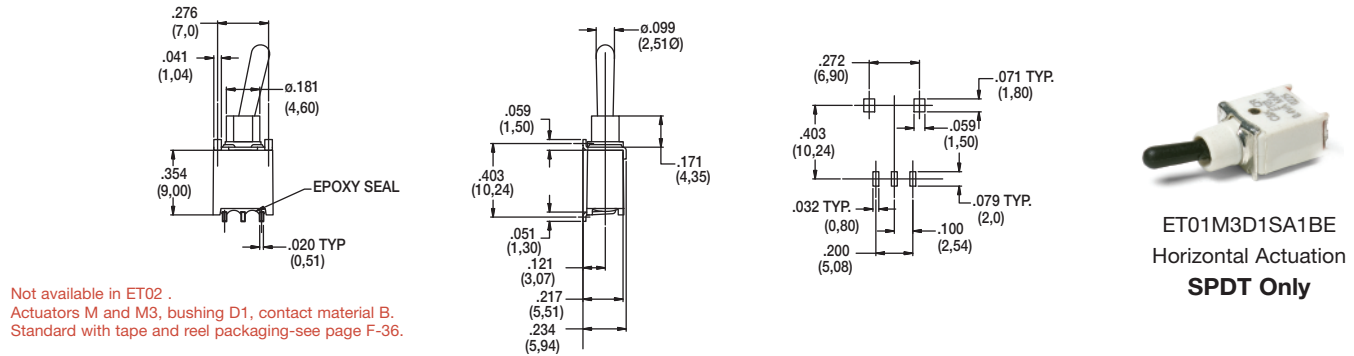

V3 VERTICAL MOUNT, V-BRACKET

V31 VERTICAL MOUNT, V-BRACKET, SNAP-IN

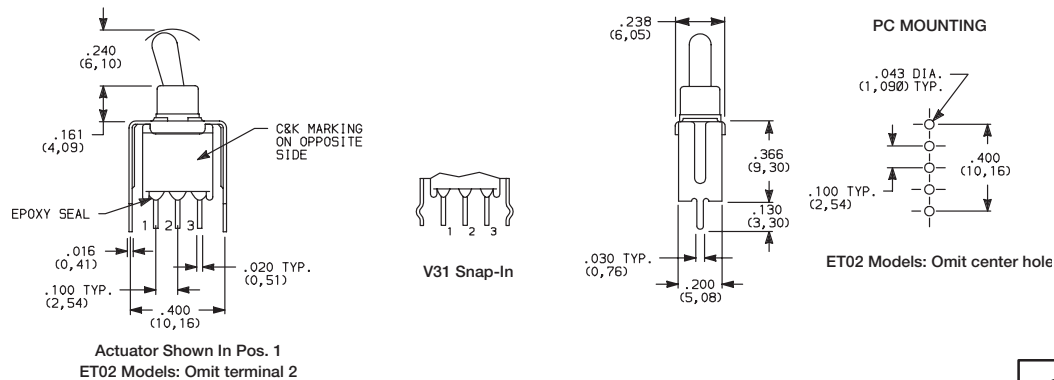




Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

www.ck-components.com

ET Series Sealed Subminiature Toggle Switches

TERMINATIONS

V3 VERTICAL MOUNT, V-BRACKET

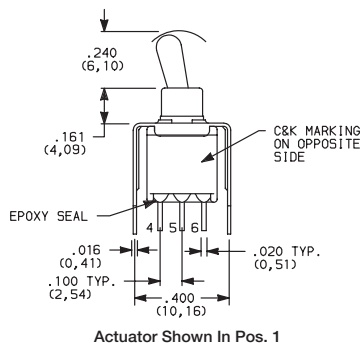

ET21MD1V3BE
DPDT

CONTACT MATERIAL

OPTION CODE	CONTACT MATERIAL	TERMINAL PLATING	RATINGS	
B	GOLD ¹	GOLD ¹	LOW LEVEL/DRY CIRCUIT	0.4 VA MAX. @ 20 V AC OR DC MAX.
P		MATTE-TIN ⁶		
Q	SILVER ^{4,5}	SILVER ⁵	POWER	ETX1 MODELS: 3 AMPS @ 120 V AC OR 28 V DC ALL OTHER MODELS: 2 AMPS @ 120 V AC OR 28 V DC
S		MATTE-TIN ⁶		
G	GOLD OVER SILVER ^{2,3}	GOLD ³	LOW LEVEL/DRY CIRCUIT OR POWER	ETX1 MODELS: 0.4 VA MAX. @ 20 V AC OR DC MAX. OR 3 AMPS @ 120 V AC OR 28 V DC ALL OTHER MODELS: 0.4 VA MAX. @ 20 V AC OR DC MAX. OR 2 AMPS @ 120 V AC OR 28 V DC
R		MATTE-TIN ⁶		

* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.


- ¹ CONTACTS & TERMINALS: Copper alloy, with gold plate over nickel plate.
² END CONTACTS: Coin silver, with gold plate over nickel plate.
³ CENTER CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate.
⁴ END CONTACTS: Coin silver, silver plated.
⁵ CENTER CONTACT & ALL TERMINALS: Copper alloy, silver plated.
⁶ TERMINALS: Copper alloy, with matte tin over nickel plate.

NOTE: Any models supplied with Q, B, G, P or R contact material are RoHS compliant.

All models **C&K** with all options (except M3 actuator) when ordered with G, L, R or Q contact material except with F1 conductive bushing.

SEAL

E EPOXY SEAL




AVAILABLE HARDWARE

Cap

PART NO.
706201000 WHITE
706202000 BLACK
706203000 RED


Material: Vinyl
Finish: Matte



F

Toggle

NOTE: Other colors available, consult Customer Service Center.



Third Angle
Projection




Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

www.ck-components.com


ET Series Sealed Subminiature Toggle Switches

TAPE & REEL

For part number ET01M3D1SAPE

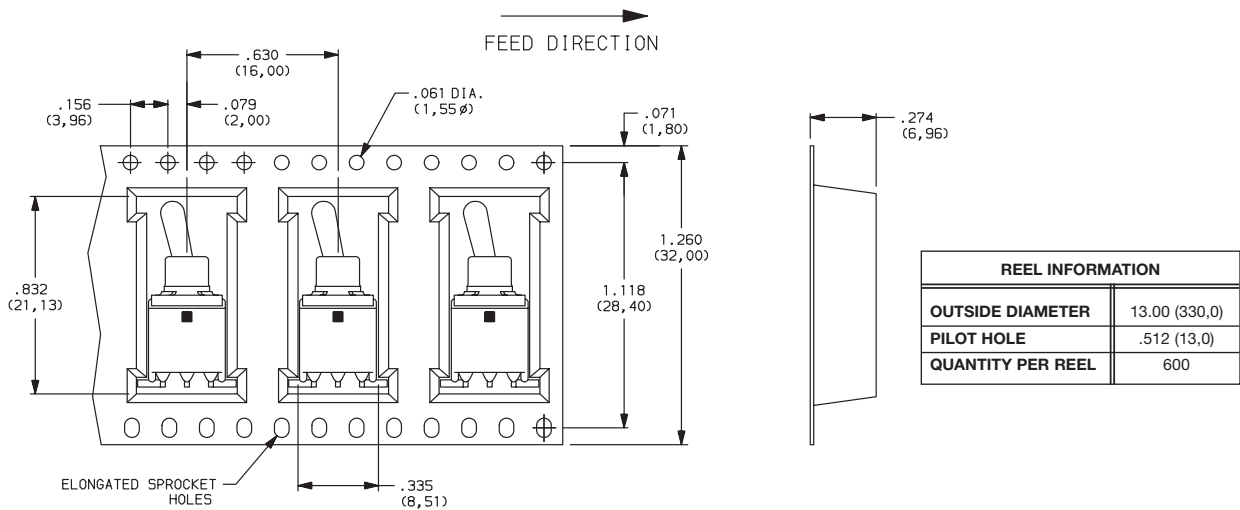

For part number ET01M3D1SA1BE

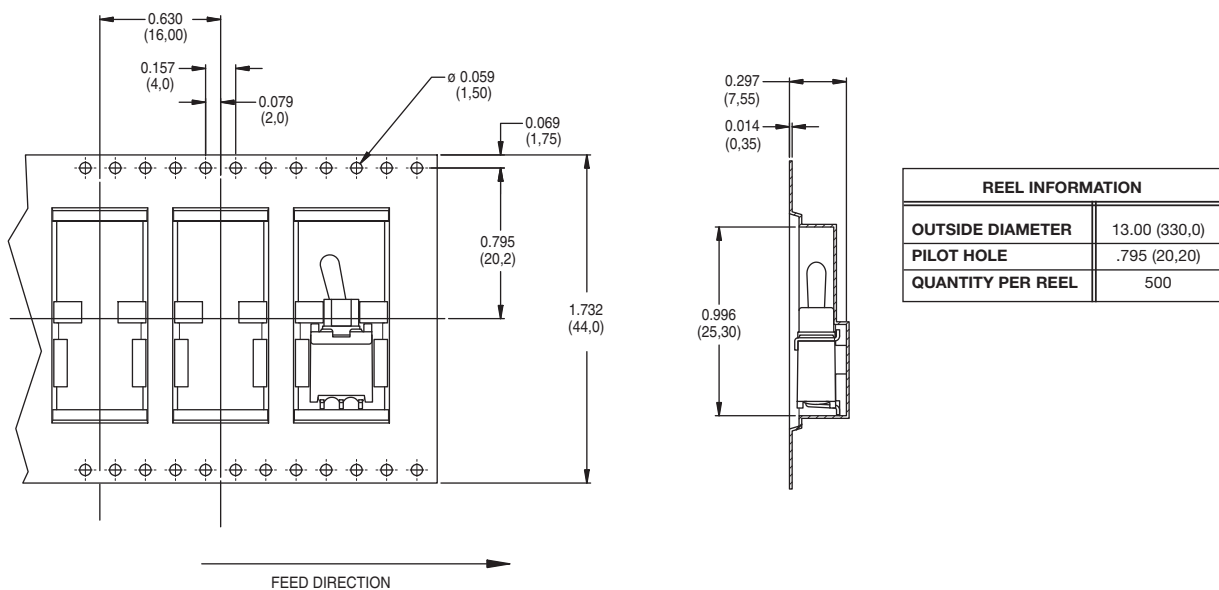

Toggle



Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Components:

[ET08MD1ABE](#) [ET01MD1AVBE](#) [ET01MD1AGE](#) [ET01SD1ABE](#) [ET01SD1CBE](#) [ET01MD1AVGE](#) [ET03LD1CQE](#)
[ET03MD1AVBE](#) [ET03MD1SAKE](#) [ET03MD1ABE](#) [ET03SD1CBE](#) [ET05MD1CBE](#) [ET08SD1CBE](#) [ET21MD1V3QE](#)
[ET23MD1AVQE](#) [ET01LD1CQE](#) [ET02MD1CKE](#) [ET01SD1WBE](#) [ET01MD1ABE](#) [ET01MD1V3BE](#) [ET01MD1SAKE](#)
[ET01LD1CBE](#) [ET02MD1CPE](#) [ET01SD1AQE](#) [ET03M3D1SAPE](#) [ET05MD1SA1BE](#) [ET01M3D1SAPE](#) [ET03MD1SAPE](#)
[ET05MD1SAPE](#) [ET01MD1SA1BE](#) [ET07LD1V31QE](#) [ET25MD1ABE](#) [ET01LF1AVSE](#) [ET01MD1APE](#) [ET01MD1CSE](#)
[ET01MF1ABE](#) [ET01MF1APE](#) [ET01S1D1AQE](#) [ET01SF1V3BE](#) [ET02M3D1AVQE](#) [ET02MD1V3BE](#) [ET02S1F1V3PE](#)
[ET02SF1V3PE](#) [ET03M3D1ABE](#) [ET03M3D1AVBE](#) [ET03M3D1V31BE](#) [ET03MD1V31BE](#) [ET03S1D1ABE](#)
[ET03S1D1AQE](#) [ET03S1D1V31BE](#) [ET05MD1V3QE](#) [ET05SD1AGE](#) [ET07LD1CBE](#) [ET08LD1AVSE](#) [ET08M3D1ARE](#)
[ET08M3D1AVBE](#) [ET21LD1CBE](#) [ET23MD1AQE](#) [ET23MD1CBE](#) [ET23SD1V3BE](#) [ET24SD1CBE](#) [ET25MD1AGE](#)
[ET25MD1CBE](#) [ET25S1D1AVPE](#) [ET27MD1ABE](#) [ET27MD1CBE](#) [ET28M3D1AVBE](#) [ET28MD1AVBE](#) [ET01LD1ABE](#)
[ET01LD1AGE](#) [ET01LD1WGE](#) [ET01M3D1ABE](#) [ET01M3D1CBE](#) [ET01M3D1CQE](#) [ET01M3D1SAKE](#) [ET01MD1AKE](#)
[ET01MD1AQE](#) [ET01MD1AVQE](#) [ET01MD1SAPE](#) [ET01MD1V3GE](#) [ET01MD1WBE](#) [ET01MF1V3BE](#) [ET01S1D1CQE](#)
[ET01S1F1V31BE](#) [ET01SD1AGE](#) [ET01SD1CQE](#) [ET01SD1V3BE](#) [ET02M3D1CQE](#) [ET02MD1AVBE](#) [ET02MD1CBE](#)
[ET02MF1V3GE](#) [ET02SD1CBE](#) [ET02SD1CGE](#) [ET02SD1WBE](#) [ET03LD1ABE](#) [ET03LD1V31BE](#) [ET03LD1WQE](#)
[ET03LF1ABE](#) [ET03LF1AVME](#) [ET03M3D1CBE](#)