

MSD INC.

ENGINEERING DATA SHEET

RELAY TYPE: FCA-325-A13

COMPUTER PART No.: 9383521

TEST PROCEDURE

MSDP-791

CUSTOMER/SPECIFICATION: CATALOG ITEM



REV N/A

 $\pm 10\%$

TEST REQUIREMENTS

COIL RES.: 290 OHMS OPERATE TIME: 15 mS MAX RELEASE TIME: 15 mS MAXCONTACT MAKE BOUNCE: 1.0 mS MAX N.O. BREAK BOUNCE: N/ACONTACT STABILIZATION TIME: N/A RATED COIL VOLTAGE: 28 VdcCONTACT VOLTAGE DROP: MFG TEST: 0.5 mV @ 100 mA - 6 VdcFINAL TEST: 60 mV @ 10 A - 28 VdcHI-POT: 1250 Vrms ALL POINTS, EXCEPT 1000 Vrms COIL TO CASEINSULATION RESISTANCE: 100 MEGOHMS MIN @ 500 VdcVIBRATION: N/ASEAL TEST: 1×10^{-8} MAX LEAK RATE COIL TRANSIENT SUPPRESSION: N/A

OTHER:

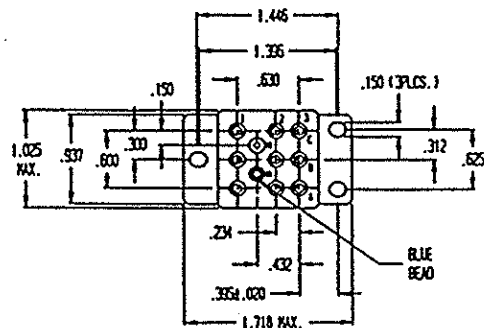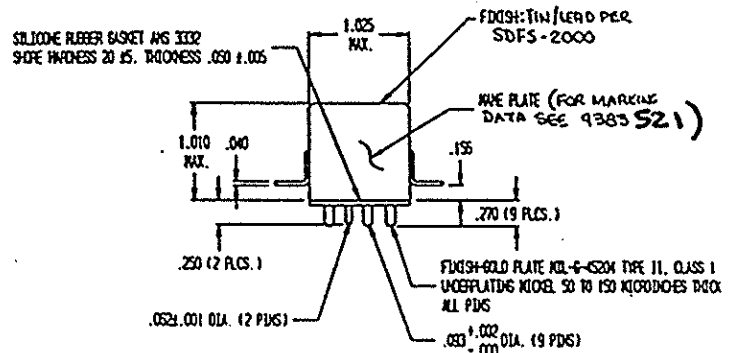

Prepared By: Date		Approved By: Date	
LES WYNNE 3-20-96		<i>L. Lockyer</i> 3-21-96	
Rev	ECN No.	Date	
A	96-065	3-20-96	

SPECIAL INSTRUCTIONS