


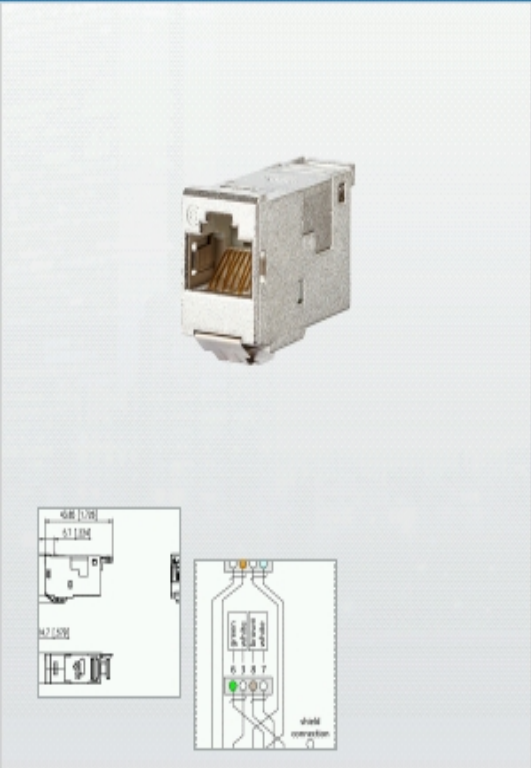

E-DAT modul Cat.6A 8(8) T568B jack

- modular termination unit RJ45
- certified to GHMT Cat.6 de-embedded PVP
- compliance with class EA to ISO/IEC 11801
- Ed.2.2:2011-06, DIN EN 50173-1:2011-09
- tested: Link up to 500 MHz
- for 10 GBit Ethernet (IEEE 802.3an)
- suitable for Power over Ethernet (PoE, PoE plus and UPoE)
- easy to install connection of 2 to 4 pair data lines
- AWG 24/1 - 22/1 and stranded wires with 7 copper conductors AWG 26/7 to BTR 8-fold insulation displacement connectors (IDC)
- marking of conductor assignment to T568B
- easy and fast insertion of wire pairs in E-DAT modul stuffer cap
- module housing made of refined zinc die-casting
- mounting without special tools
- strain relief with cable tie at the module
- mounting version: Modul
- cable feed 180°

Technical Data	
P/N	130910-I-B1
Feature 1	Cat.6 T568B
Feature 2	BTR cut-out
EAN-No	4250184118305

last update on Thursday, 28. March 2013 - 14:43