


10 9 8 7 6 5 4 3 2 1


FOR 3~12CKTS.



FOR 13~17CKTS.

(ONLY COVER SHAPE IS DIFFERENT FROM 3~12CKTS.)

TRADE MARK



NOTES: 1. MATERIAL

TERMINAL: PHOS-BRO, TIN-PLATED. (t=0.254)

HOUSING: PBT(15%G.F.), UL94V-0

G.E. PLASTICS JAPAN LTD.

VALOX DR-48 UL FILE NO. E45587

COVER: PBT(30%G.F.), UL94V-0

G.E. PLASTICS JAPAN LTD.

VALOX 420-SEO UL FILE NO. E45587





2. APPLICABLE WIRE

1.5 PITCH RIBBON CABLE


(UL2468, AWG#24~#26 TOP-COATED WIRE)

3. THE CABLE STRIPED AS SHOWN IN THE FIG.,


* (MARKED INSULATION) PART SHOULD NOT BE PUSHED AND SLID DIRECTLY BY THE COVER, BECAUSE THE COVER MAY BE POSSIBLY PUSHED DOWN.

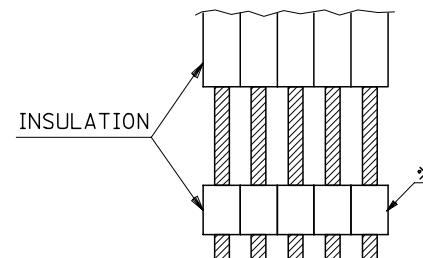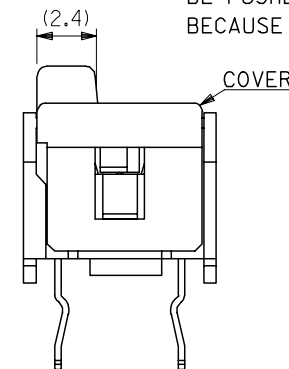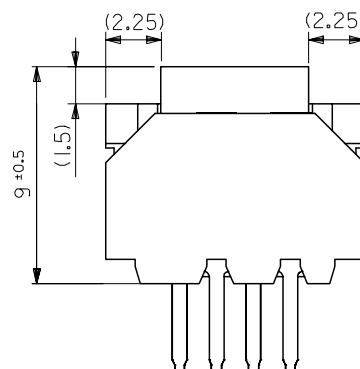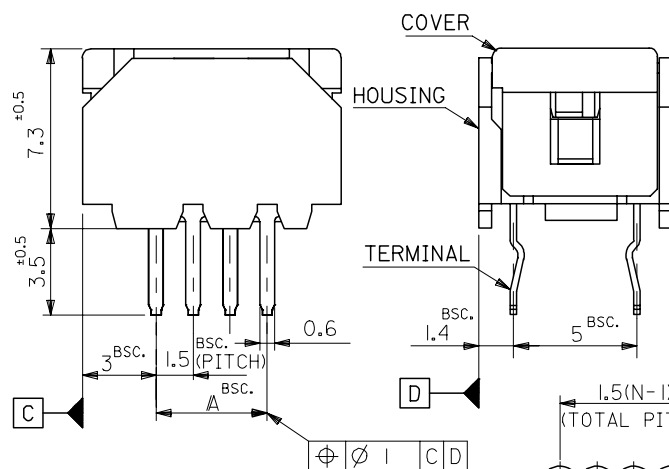

30	24	52004-1710	17
28.5	22.5	-1610	16
27	21	-1510	15
25.5	19.5	-1410	14
24	18	-1310	13
22.5	16.5	-1210	12
21	15	-1110	11
19.5	13.5	-1010	10
18	12	-0910	9
16.5	10.5	-0810	8
15	9	-0710	7
13.5	7.5	-0610	6
12	6	-0510	5
10.5	4.5	-0410	4
9	3	-0310	3
IB	A	52004-0310	3
		ENG. NO.	極数

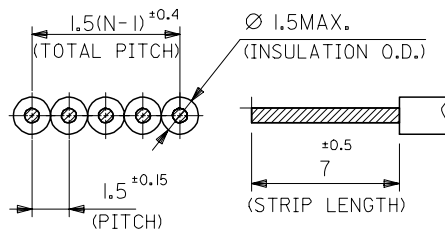

RECOMMENDED WIRE DIM.

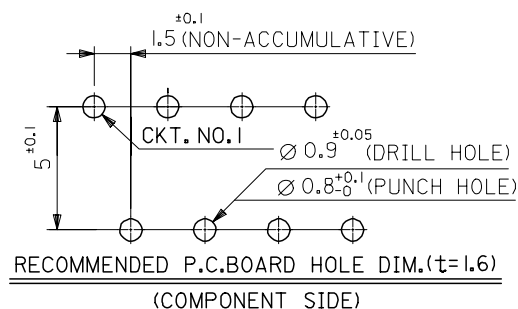

REVISED	ECNNO: J2004-4815 DRAWN:IDA CHKD:HTAKASE APPR: JMIYAZAW	2004/08/05 2004/08/05 2004/08/17	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
				10 UNDER	±0.2	DRAWN BY SKUNISHI	DATE 86/08/27	TITLE 1.5 WIRE TRAP CONN.			
				10 OVER 30 UNDER	±0.25	CHECKED BY HII	DATE 93/01/18				
				30 OVER	±0.3	APPROVED BY MFUKUSHIMA	DATE 93/01/18	MOLEX INCORPORATED			
				ANGULAR ±3 °	MATERIAL NO.	DOCUMENT NO.	SHEET NO.				
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-52004-**10			1 OF 2
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							


(注記) 1. 材質

VALOX 420-SE0 UL FILE NO. E45587

2. 適用電線

(UL 2468、AWG#24~#26 錫コート線)

3. 下図の様な端末処理ケーブルにて、※部を直接カバーに押し付けスライドさせる使用法はカバーが押し下げられる可能性があるため不可。



30	24	52004-17 10	17
28.5	22.5	↑ -16 10	16
27	21	-15 10	15
25.5	19.5	-14 10	14
24	18	-13 10	13
22.5	16.5	-12 10	12
21	15	-11 10	11
19.5	13.5	-10 10	10
18	12	-09 10	9
16.5	10.5	-08 10	8
15	9	-07 10	7
13.5	7.5	-06 10	6
12	6	-05 10	5
10.5	4.5	↓ -04 10	4
9	3	52004-03 10	3
B	A	ENG NO	極致

電線推獎寸法

REVISED	ECNO: J2004-4815 DRAWN: AIDA CHKD: HTAKASE APPR: JM YAZAW	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
			10 UNDER	± 0.2	DRAWN BY SKUNISHI	DATE 86/08/27	TITLE 1.5 WIRE TRAP CONN. (JAPAN)		
			10 OVER 30 UNDER	± 0.25	CHECKED BY HII	DATE 93/01/18			
			30 OVER	± 0.3	APPROVED BY MFUKUSHIMA	DATE 93/01/18	MOLEX INCORPORATED		
			ANGULAR	± 3 °	MATERIAL NO.				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-52004-*x10		2 OF 2
REV			SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSIONS				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[52004-0510](#)