


Number of contacts

9–25

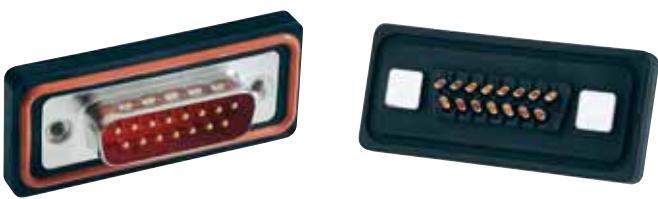

IP 67, turned solder cups, with rear plastic mounting plate


D-Sub

Identification	No. of contacts	Part No.	
		S4 ¹⁾	
Male connector metal shell with dimples	9 15 25	09 67 509 09 67 515 09 67 525	615 615 615
Please insert digit for flange thread			
4-40 UNC ▶ 7 M3 ▶ 9			
Female connector metal shell	9 15 25	09 67 509 09 67 515 09 67 525	715 715 715
Please insert digit for flange thread			
4-40 UNC ▶ 6 M3 ▶ 8			

¹⁾ S4: ≥ 0.76 µm Au (30 µinch)

Number of contacts

9–25

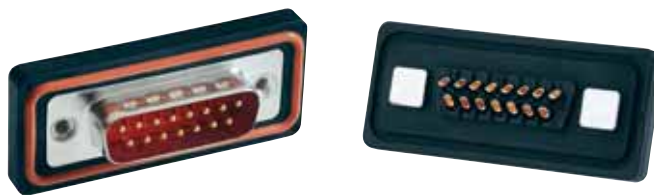

IP 67, turned solder cups, with rear plastic mounting plate


Identification

Drawing

Dimensions in mm


Male connector

9 – 25 contacts

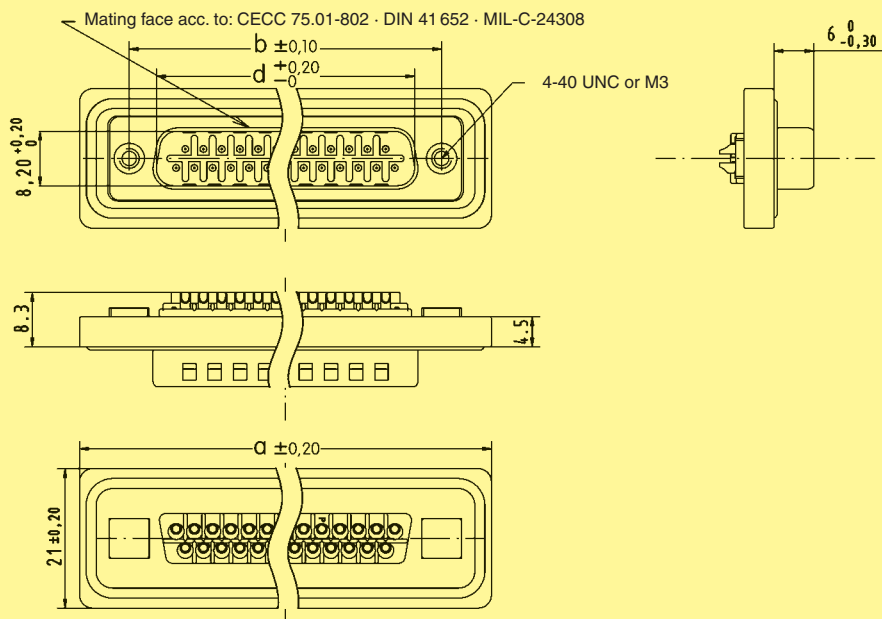

Female connector

9 – 25 contacts

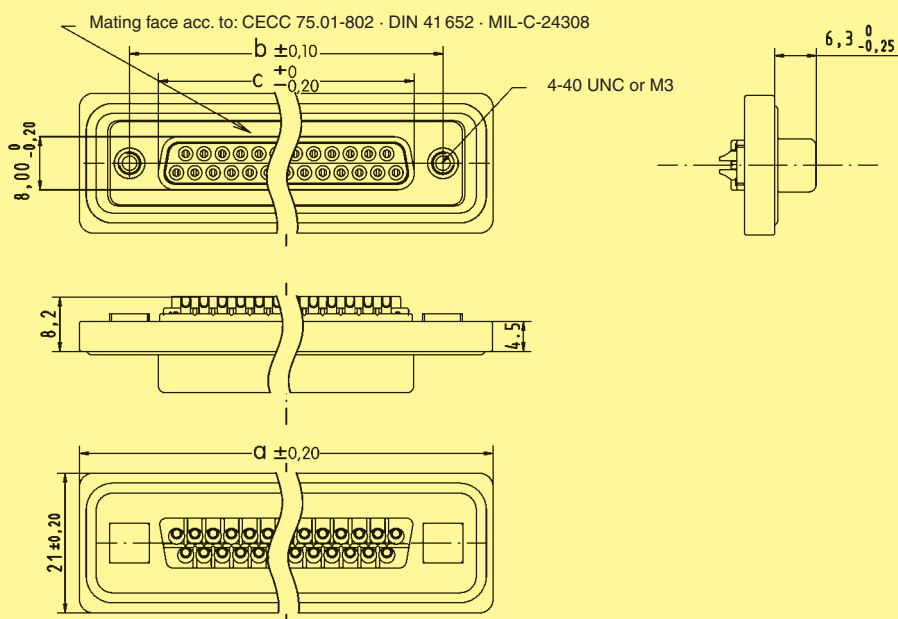

	a	b	c	d
9	40.0	25.00	16.4	16.9
15	48.3	33.30	24.7	25.2
25	62.0	47.04	38.5	38.9