

K6 Miniature Key Switches

Features/Benefits

- **Excellent tactile feel**
- **Wide variety of LED's, travel and actuation forces**
- **Designed for low-level switching**
- **Detector version available**
- **RoHS compliant**

Typical Applications

- **Automotive**
- **Industrial electronics**
- **Computers and network equipment**



Construction

FUNCTION: momentary action
 CONTACT ARRANGEMENT: 1 make contact = SPST, N.O.
 DISTANCE BETWEEN BUTTON CENTERS:
 min. 7,5 and 11,8 (0.295 and 0.465)
 TERMINALS: Snap-in pins, tinned
 MOUNTING: Soldered by PC pins, locating pins
 PC board thickness: 1,5 (0.0591)

Mechanical

TOTAL TRAVEL/SWITCHING TRAVEL: 1,5/0,9 (0.059/0.035)
 PROTECTION CLASS: IP 40 according to DIN/IEC 529

1) Voltage rise: 300 V/s
 2) According to DIN 41640; IEC 512-2
 3) Higher values upon request

Packaging

THT: bulk in boxes of 500 pieces
 SMT: bulk in boxes of 500 pieces
 reels of 500 pieces (with LED) or 750 pieces (without LED)

Electrical

SWITCHING POWER MIN./MAX.: 0.02 mW / 3 W DC
 SWITCHING VOLTAGE MIN./MAX.: 2 V DC / 30 V DC
 SWITCHING CURRENT MIN./MAX.: 10 mA / 100 mA DC
 DIELECTRIC STRENGTH (50 Hz)^{1) 2)}: ≥ 300 V
 OPERATING LIFE: ≥ 2 x 10⁵ operations ³⁾
 ≥ 1 X 10⁵ operations for SMT version
 CONTACT RESISTANCE: Initial ≤ 50 mΩ
 INSULATION RESISTANCE: ≥ 10¹⁰ Ω
 BOUNCE TIME: ≤ 1 ms
 Operating speed 100 mm/s (3.94/s)

Environmental

OPERATING TEMPERATURE: -40°C to 85°C.
 STORAGE TEMPERATURE: -40°C to 95°C.


Process

SOLDERABILITY:
 THT: wave soldering, compatible with lead free soldering profile
 Hand soldering, 350°C for 3s
 SMT: not compatible with lead free reflow profile
 245°C for 5s

How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

Note: Some of the configurations may not be available or could require some development.

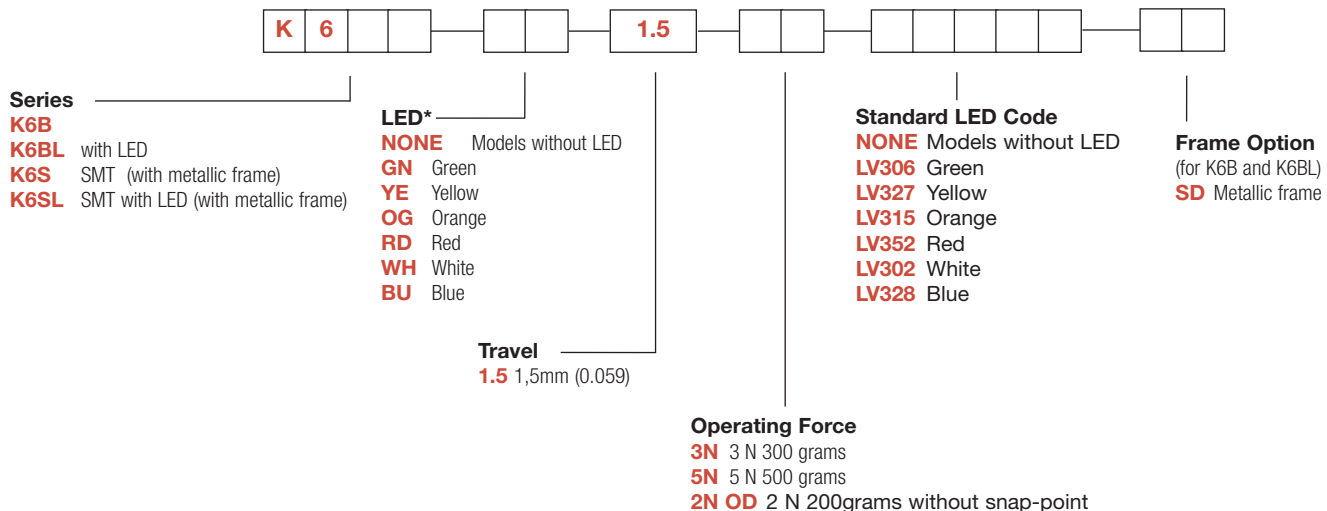

* Additional LED colors available by request.



Dimensions are shown: mm
 Specifications and dimensions subject to change




K6


Miniature Key Switches

SERIES 

K6B WITHOUT LED
K6BL WITH LED

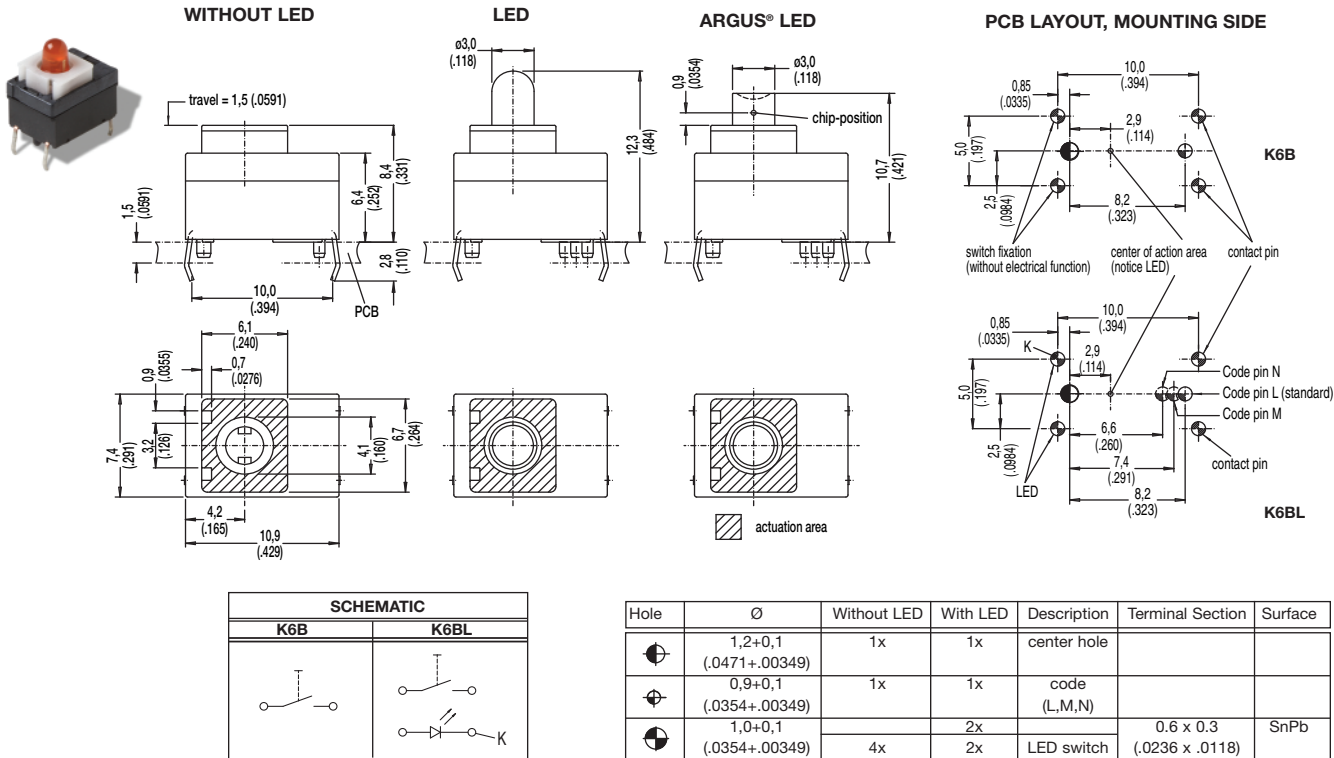

K6S WITHOUT LED
K6SL WITH LED

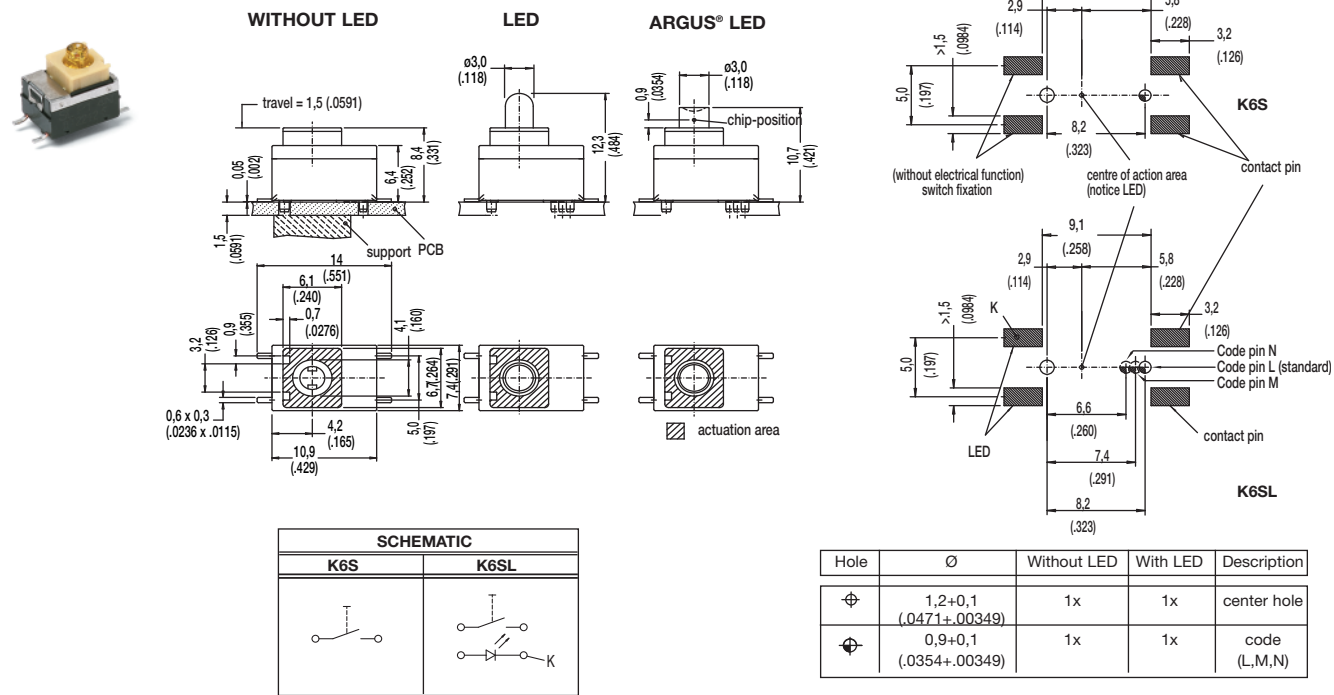

Dimensions are shown: mm

Specifications and dimensions subject to change

www.ck-components.com

K6

The diagram illustrates a linked list structure. It consists of a sequence of nodes connected by arrows. The nodes are represented as rectangles of different sizes and are arranged horizontally. The first node is a small rectangle. The second node is a larger rectangle. The third node is a small rectangle. The fourth node is a small rectangle. The fifth node is a small rectangle. The sixth node is a large rectangle. The seventh node is a small rectangle. The arrows indicate the flow from one node to the next, starting from the first node and ending at the last node.

STANDARD LED CODE	COLOR
NONE	Models without LED
LV306	Green
LV327	Yellow
LV315	Orange
LV352	Red
LV302	White
LV328	Blue

1.5 1.5 MM

OPTION CODE	OPERATING FORCE
3N	3 N, 300 g
5N	5 N, 500 g
2N OD	2 N, 200g without snap-point

A diagram of a linked list with 5 nodes. The first three nodes are black, and the last two are white. The fourth node is highlighted with a red border.

SD METALLIC FRAME (OPTION FOR K6B AND K6BL)

NOTE: K6S and K6SL are equipped with metallic frame (SD not specified)



Key Switches



Dimensions are shown: mm
dimensions subject to change

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Components:

[K6BL OG 1.5 5N](#) [K6BL GN 1.5 5N](#) [K6BL YE 1.5 3N](#) [K6BL YE 1.5 5N](#) [K6BL GN 1.5 3N](#) [K6BL RD 1.5 3N](#) [K6BL RD 1.5 5N](#) [K6BL OG 1.5 3N](#) [K6B 1.5 5N](#) [K6B 1.5 3N](#) [K6BL RD 1.5 3N L352](#) [K6BL YE 1.5 3N L327](#) [K6BL YE 1.5 5N L327](#) [K6BLGN1.5 3N L306](#) [K6BL OG 1.5 3N L405](#) [K6BL0G1.52N0DL315](#) [K6BLBU1.53NL328](#) [K6BLGN1.52N0DL306](#) [K6BLRD1.52N0DL352](#) [K6BLWH1.53NL302](#) [K6BLYE1.52N0DL327](#) [K6S1.53NSD](#) [K6SL0G1.55NL315KARTON](#) [K6SLGN1.53NL306SD](#) [K6SLGN1.55NL306SD](#) [K6SLGN1.55NL326SD](#) [K6SLWH1.55NL302SD](#) [K6SLYE1.54NL327SD](#) [K6SLYE1.55NL327SD](#) [K6BL0G1.53NL315](#) [K6BL0G1.53NL405](#) [K6BL0G1.55NL315](#) [K6BLBU1.55NL328](#) [K6BL GN 1.5 3N L306](#) [K6BL RD 1.5 5N L352](#) [K6S1.52N0D](#) [K6BLBU1.55NLV328](#) [K6BL0G1.53NLV315](#) [K6SLYE1.55NLV327TRSD](#) [K6SLGN1.55NLV306SD](#) [K6SLGN1.53NLV306SD](#) [K6BLWH1.53NLV302](#) [K6BL0G1.55NLV315](#) [K6BLGN1.55NLV306](#) [K6BLBU1.53NLV328](#) [K6BLWH1.55NLV302](#) [K6SLYE1.55NLV327SD](#) [K6SL0G1.55NLV315](#) [K6BLYE1.53NLV327](#) [K6BLRD1.55NLV352](#) [K6BLYE1.55NLV327](#) [K6S1.55N](#) [K6SLWH1.55NLV302SD](#) [K6SLYE15NLV327TRSD](#) [K6BLGN1.53NLV306](#)