


# 1.27mm Pitch Connector

## FX1 Series

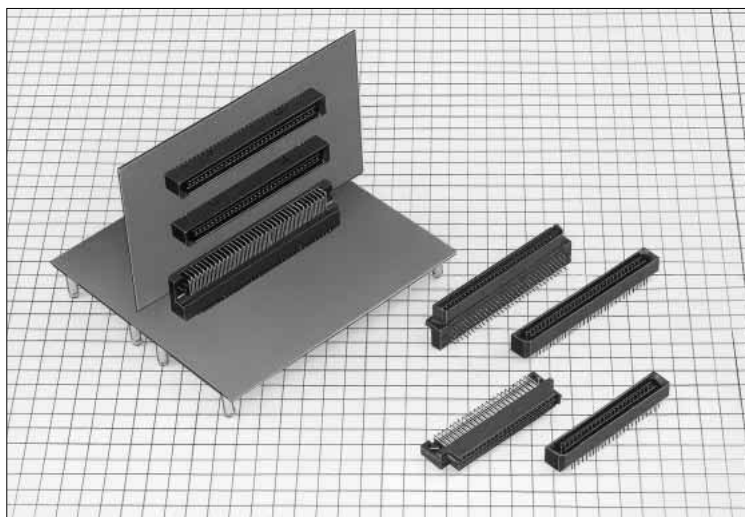

DIN duplex density mount has been achieved.  
(DIN 96 contacts and FX1 192 (96x2))

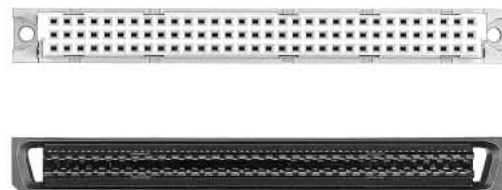


Photo 1

### ■Features

#### 1. High density and space saved-DIN Duplex Mount Achieved

The alignment of the mating area in 4-row allows to duplex the number of contacts in the nearly equivalent mount square as for the conventional DIN connector.(Refer to photo (1).)

#### 2. High Current and High Voltage


Two-thirds of total contact numbers are used for half pitch signaling contact, while the other one-third thereof is used for the power ground contact. Power ground contact corresponds to high current (1A) and high voltage (250V).

#### 3. Sequence Structure

Considering insertion/extraction in active power mode and maintenance on the end user side, the FX1 series is designed in a mechanism that can afford the time different contact at two steps. (For details, refer to Figure (2) as shown on the right.)


#### 4. Mis-insertion Prevent

Provide the insertion guide on both ends of connector, and widen an inductive area in order to prevent mis-insertion.



### Sequence Structure (Pin contact sequence)

Figure 2

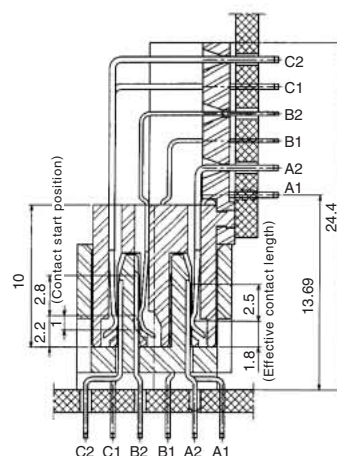

\*FX1 Series (2 step sequence)

|   |              |
|---|--------------|
| 1 | Row B        |
| 2 | Row A, row C |

Setting row B to ground, if active cable insertion and extraction are performed as power supply, arc will occur between contact and contact. The row B contact structure is constructed to separate arc occurrence point a and normal contact point b, and minimizes affects on the contact.

## Product Specifications

| Rating | Current rating<br>Signal Contact: 0.5A<br>Power Supply Contact: 1A | Voltage rating<br>Signal Contact: 125V AC<br>Power Supply Contact: 250V AC | Operating Temperature Range -55 to 85°C (Note 1)<br>Operating Humidity Range 40 to 80% | Storage Temperature Range -10 to +60°C (Note 2)<br>Operating Humidity Range 40 to 70% (Note 2) |
|--------|--------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
|--------|--------------------------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|

| Item                             | Specification                                                               | Condition                                                                                                      |
|----------------------------------|-----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| 1. Insulation Resistance         | 1000M ohms min.                                                             | 250V DC                                                                                                        |
| 2. Withstanding Voltage          | No flashover or insulation breakdown.                                       | 1 minute      Signal contact      300V AC<br>Power supply contact      600V AC                                 |
| 3. Contact Resistance            | 60m ohms max. (conductor resistance included)                               | 100mA                                                                                                          |
| 4. Vibration                     | No electrical discontinuity of 1μs or more                                  | Frequency: 10 to 55 Hz, single amplitude of 0.75 mm, 2 hours in each of the 3 directions.                      |
| 5. Humidity (Steady state)       | Contact resistance: 70m ohms max.<br>Insulation resistance: 1000M ohms min. | 96 hours at temperature of 40°C and humidity of 90% to 95%                                                     |
| 6. Temperature Cycle             | Contact resistance: 70m ohms max.<br>Insulation resistance: 1000M ohms min. | (-55°C: 30 minutes → 15- to 35°C: 5 minutes max. →<br>85°C: 30 minutes → 15- to 35°C: 5 minutes max.) 5 cycles |
| 7. Durability (Mating/un-mating) | Contact resistance: 70 m ohms max.                                          | 500 cycles                                                                                                     |

Note 1: Includes temperature rise caused by current flow.

Note 2: The term "storage" refers to products stored for long period of time prior to mounting and use. Operating Temperature Range and Humidity range covers non conducting condition of installed connectors in storage, shipment or during transportation.

Note 3: Information contained in this catalog represents general requirements for this Series. Contact us for the drawings and specifications for a specific part number shown.

## Material

### FX1 Series

| Parts        |                    | Material        | Finish                                            | Remarks |
|--------------|--------------------|-----------------|---------------------------------------------------|---------|
| Insulator    | Header             | PPS             | Black                                             | UL94V-0 |
|              | Receptacle         | PPS/ PTB        |                                                   |         |
| Contact      | Straight header    | Brass           | Contact area: Tin plated<br>Lead area: Tin plated | _____   |
|              | Right angle header | Phosphor bronze |                                                   |         |
|              | Receptacle         | Phosphor bronze |                                                   |         |
| Prefixed pin |                    | Phosphor bronze | Tin plated                                        | _____   |

FX1 Series 1.27mm Pitch Connector

## ■ Ordering Information

### ● FX1 Series


**FX1** - **192** **P** - **1.27** **DSA** **L**

① ② ③ ④ ⑤ ⑥

|                                               |                                                    |
|-----------------------------------------------|----------------------------------------------------|
| ① Series Name : FX1                           | ④ Contact pitch: 1.27mm                            |
| ② Number of contacts: 144, 192, 216           | ⑤ Contact type: DS : Right angle<br>DSA : Straight |
| ③ Connector type : P-header<br>: S-receptacle | ⑥ L: Board prefixed pin                            |

Note: The cleaning type only is applied on the header side to FX1 series.



## ◆ Application Pattern

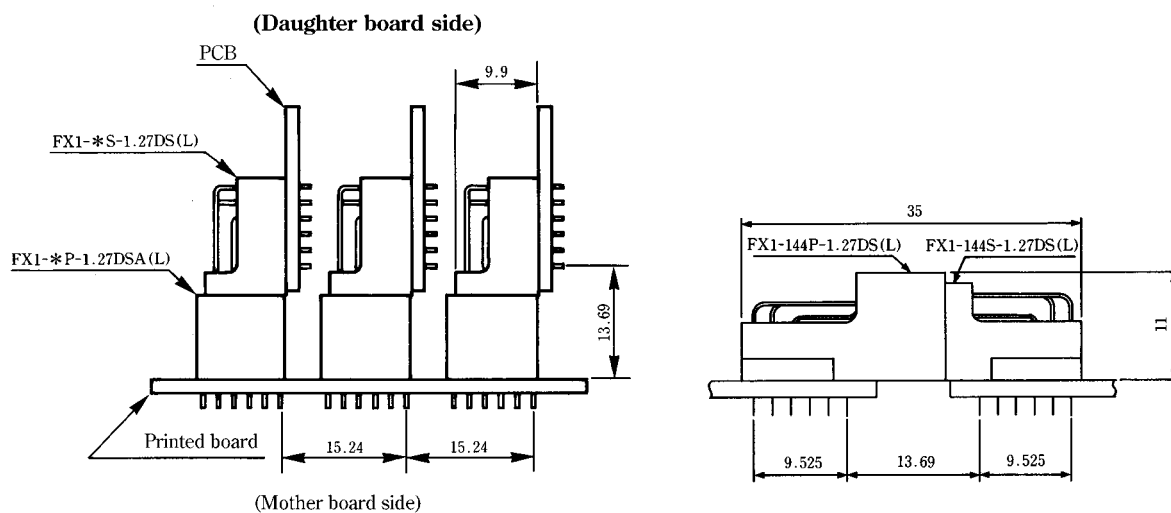


Note: FX1V series is designed similar

## FX1 Series

### ■Receptacle : Right Angle Type

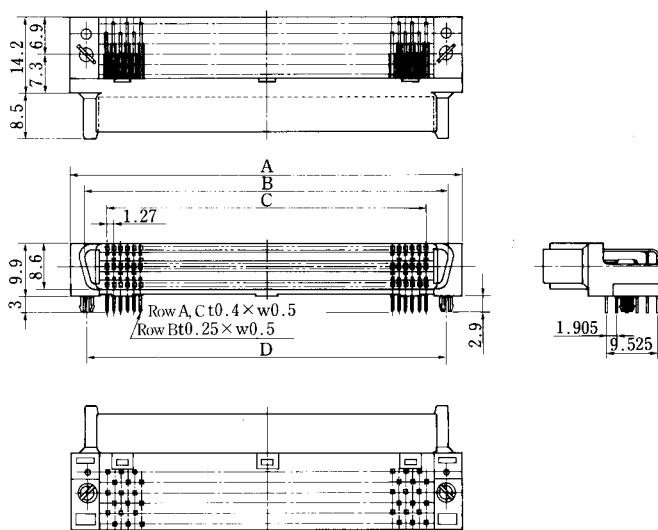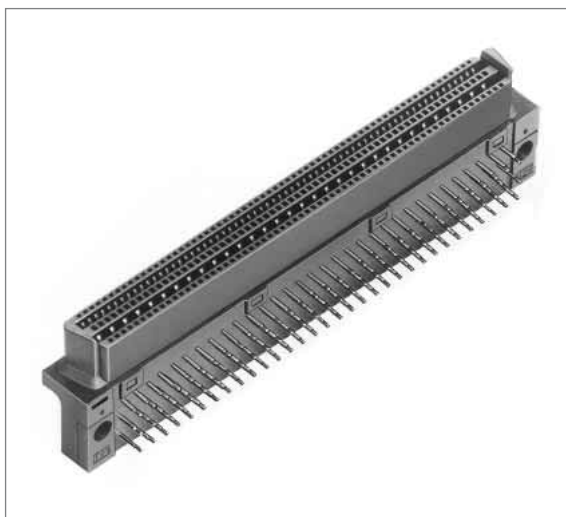

### ◆PCB mounting pattern Applicable board thickness t=1.6mm

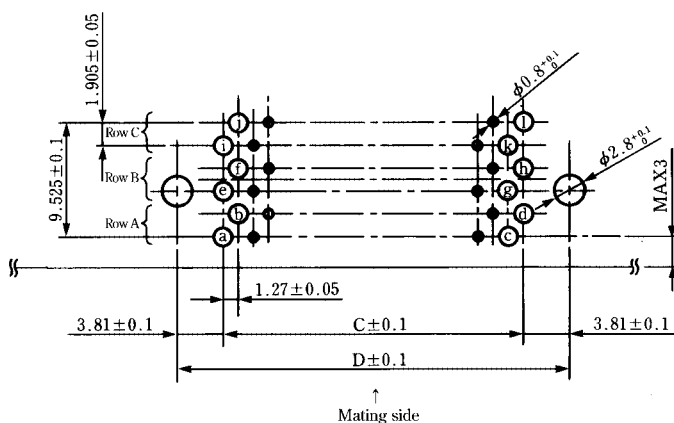

n= number of contacts



- |                       |                       |                       |
|-----------------------|-----------------------|-----------------------|
| Ⓐ A1                  | Ⓔ B1                  | Ⓛ C1                  |
| Ⓑ A2                  | Ⓛ B2                  | Ⓜ C2                  |
| Ⓒ $A \frac{n}{3} - 1$ | Ⓛ $B \frac{n}{3} - 1$ | Ⓨ $C \frac{n}{3} - 1$ |
| Ⓓ $A \frac{n}{3}$     | Ⓛ $B \frac{n}{3}$     | Ⓩ $C \frac{n}{3}$     |

Unit: mm


| Part Number          | CL No.        | Number of Contacts | A      | B     | C     | D     | RoHS |
|----------------------|---------------|--------------------|--------|-------|-------|-------|------|
| FX1-144S-1.27DS(71)  | 571-0003-7-71 | 144                | 73.29  | 68.08 | 59.69 | —     | YES  |
| FX1-144S-1.27DSL(71) | 571-0053-5-71 |                    |        |       |       | 67.31 |      |
| FX1-192S-1.27DS(71)  | 571-0004-0-71 | 192                | 93.61  | 88.4  | 80.01 | —     |      |
| FX1-192S-1.27DSL(71) | 571-0054-8-71 |                    |        |       |       | 87.63 |      |
| FX1-216S-1.27DS(71)  | 571-0005-2-71 | 216                | 103.77 | 98.56 | 90.17 | —     |      |
| FX1-216S-1.27DSL(71) | 571-0055-0-71 |                    |        |       |       | 97.79 |      |

## FX1 Series 1.27mm Pitch Connector

### Header : Straight Type

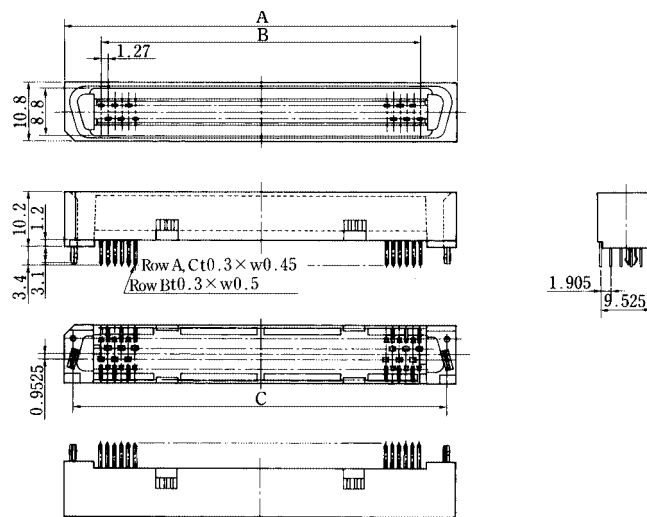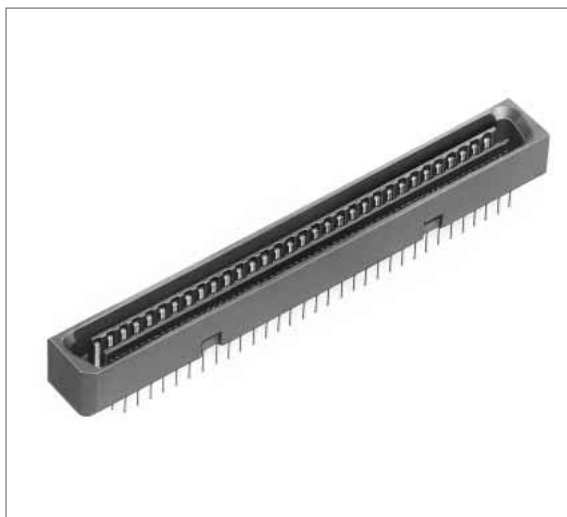

### PCB mounting pattern Applicable board thickness $t=1.6\text{mm}$

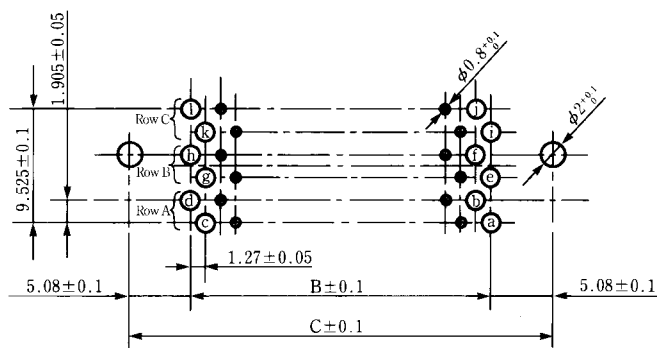

● If no board prefixed pin is used,  $\phi 2$  is not required on the board.


$n$  = number of contacts

|                       |                       |                       |
|-----------------------|-----------------------|-----------------------|
| Ⓐ A1                  | Ⓔ B1                  | ⓲ C1                  |
| Ⓑ A2                  | Ⓛ B2                  | ⓳ C2                  |
| Ⓒ $A \frac{n}{3} - 1$ | Ⓜ $B \frac{n}{3} - 1$ | ⓴ $C \frac{n}{3} - 1$ |
| Ⓓ $A \frac{n}{3}$     | Ⓨ $B \frac{n}{3}$     | ⓵ $C \frac{n}{3}$     |


Unit: mm

| Part Number           | CL No.        | Number of Contacts | A      | B     | C      | RoHS |
|-----------------------|---------------|--------------------|--------|-------|--------|------|
| FX1-144P-1.27DSA(71)  | 571-0303-0-71 | 144                | 73.29  | 59.69 | —      | YES  |
| FX1-144P-1.27DSAL(71) | 571-0353-9-71 |                    |        |       | 69.85  |      |
| FX1-192P-1.27DSA(71)  | 571-0304-3-71 | 192                | 93.61  | 80.01 | —      |      |
| FX1-192P-1.27DSAL(71) | 571-0354-1-71 |                    |        |       | 90.17  |      |
| FX1-216P-1.27DSA(71)  | 571-0305-6-71 | 216                | 103.77 | 90.17 | —      |      |
| FX1-216P-1.27DSAL(71) | 571-0355-4-71 |                    |        |       | 100.33 |      |

## Header : Right Angle Type

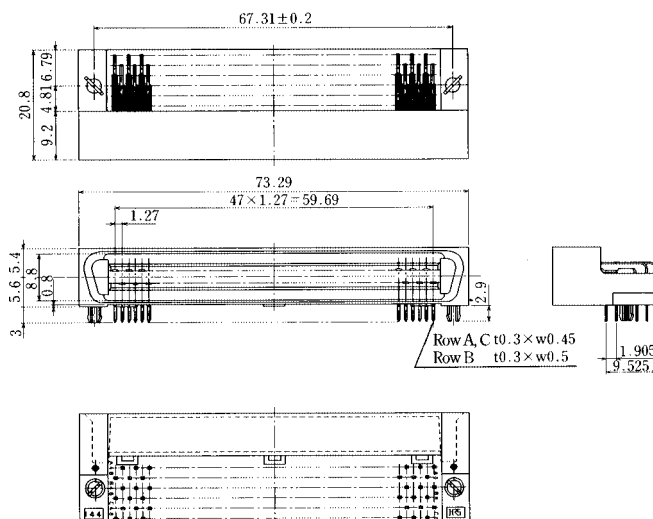

## PCB mounting pattern Applicable board thickness t=1.6mm

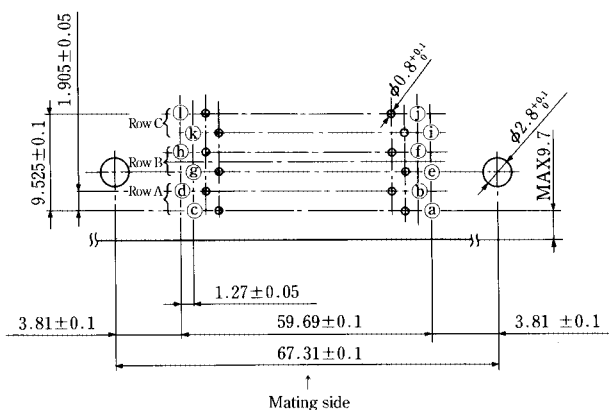

n= number of contacts

- |                         |                         |                         |
|-------------------------|-------------------------|-------------------------|
| (a) A1                  | (e) B1                  | (i) C1                  |
| (b) A2                  | (f) B2                  | (j) C2                  |
| (c) $A \frac{n}{3} - 1$ | (g) $B \frac{n}{3} - 1$ | (k) $C \frac{n}{3} - 1$ |
| (d) $A \frac{n}{3}$     | (h) $B \frac{n}{3}$     | (l) $C \frac{n}{3}$     |

| Part Number          | CL No.        | Number of Contacts | RoHS |
|----------------------|---------------|--------------------|------|
| FX1-144P-1.27DS(71)  | 571-0203-6-71 | 144                | YES  |
| FX1-144P-1.27DSL(71) | 571-0253-4-71 |                    |      |

## ◆ Precautions

1. Soldering
  - (1) In the case of manual soldering, complete services under the condition of soldering iron bit temperature below 360°C for 5 seconds max. Please be sure to coat the contacts with solder so that no force is given.
  - (2) In the case of dip soldering bath, complete service under the condition of soldering iron bit temperature below 260°C for 10 seconds max.
2. Prefixed function  
If the prefixed function is required, please use to the board prefixed pin type.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Hirose Electric:

[FX1-144S-1.27DS\(71\)](#) [FX1-192S-1.27DS\(71\)](#) [FX1-216S-1.27DS\(71\)](#) [FX1-144S-1.27DSL\(71\)](#) [FX1-192S-1.27DSL\(71\)](#) [FX1-216S-1.27DSL\(71\)](#) [FX1-144P-1.27DS\(71\)](#) [FX1-144P-1.27DSL\(71\)](#) [FX1-144P-1.27DSA\(71\)](#) [FX1-192P-1.27DSA\(71\)](#) [FX1-216P-1.27DSA\(71\)](#) [FX1-144P-1.27DSAL\(71\)](#) [FX1-192P-1.27DSAL\(71\)](#) [FX1-216P-1.27DSAL\(71\)](#)