



PCB terminal block - MKKDS 3/10-5,08 MC BK/OG H1L - 1712467

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB terminal block, Nominal current: 22 A, Nom. voltage: 400 V, Pitch: 5.08 mm, Number of positions: 10, Connection method: Screw connection with tension sleeve, Mounting: Wave soldering, Color: multi-color, The article can be aligned to create different nos. of positions!

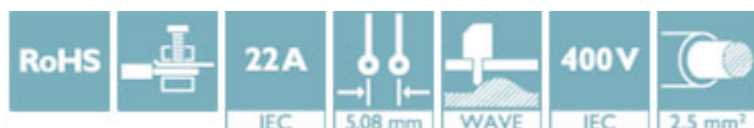

Key Commercial Data

Packing unit	50 STK
GTIN	 4 055626 295572
GTIN	4055626295572
Custom tariff number	85369010
Note	Made to Order (non-returnable)

Technical data

Dimensions

Length	22.3 mm
Pitch	5.08 mm
Dimension a	45.72 mm
Constructional height	32 mm
Length of the solder pin	5 mm
Pin dimensions	0,9 x 0,9 mm
Hole diameter	1.3 mm

General

Insulating material group	I
Rated voltage (III/2)	400 V
Nominal current I_N	22 A
Nominal cross section	2.5 mm ²
Solder pin surface	Sn
Flammability rating according to UL 94	V0
Number of positions	10
Screw thread	M3

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

PCB terminal block - MKKDS 3/10-5,08 MC BK/OG H1L - 1712467

Technical data

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

1712467