



PRODUCT SPECIFICATION

USB A TYPE PLUG CONNECTOR SMT TYPE

(MOLEX P/N: 48037 Series)

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
D	EC No: SH2007-0758 DATE: 2007/05/23	USB A TYPE PLUG CONNECTOR SMT TYPE	1 of 8
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-48037-001	Donic.Yang		

TEMPLATE FILENAME: PRODUCT_SPEC[SIZE_A4](V.1).DOC



PRODUCT SPECIFICATION

1.0 SCOPE.....	3
2.0 Applicable Document.....	3
3.0 Requirements.....	3
4.0 RATINGS.....	3
5.0 ELECTRICAL PERFORMANCE.....	4
MECHANICAL PERFORMANCE.....	5
ENVIRONMENTAL PERFORMANCE.....	6
6.0 PRODUCT Qualification and Prequalification Test Sequence.....	8

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
D	EC No: SH2007-0758 DATE: 2007/05/23	USB A TYPE PLUG CONNECTOR SMT TYPE	2 of 8
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-48037-001	Donic.Yang		

TEMPLATE FILENAME: PRODUCT_SPEC[SIZE_A4](V.1).DOC



PRODUCT SPECIFICATION

USB A TYPE PLUG CONNECTOR

1.0 SCOPE

This specification covers the requirements for product performance and test methods of USB A TYPE (Universal Serial Bus Revision 2.0) Plug Connector.

2.0 PRODUCT DESCRIPTION

2.1 PRODUCT NAME AND SERIES NUMBER(S)

2.1.1 PRODUCT NAME : USB A Type Plug Connector

2.1.2 SERIES NUMBER : 48037 Series

2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

See the appropriate Sales Drawings for information on dimensions, materials, platings and markings.

2.3 SAFETY AGENCY APPROVALS

3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

EIA-364.

MIL-STD-202.

MIL-STD-1344A.

USB 2.0 SPECIFICATIONS

4.0 RATINGS

4.1 VOLTAGE

150 Volts AC (RMS)

4.2 CURRENT

1.5_Amps

4.3 TEMPERATURE

Operating Temperature: - 20°C to + 85°C

Stock Temperature : 0~50°C

Reliability Temperature : -55°C~85°C

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
D	EC No: SH2007-0758 DATE: 2007/05/23	USB A TYPE PLUG CONNECTOR SMT TYPE	3 of 8
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-48037-001	Donic.Yang		



PRODUCT SPECIFICATION

5.0 PERFORMANCE

5.1 APPEARANCE REQUIREMENTS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
1	Examination of Product	EIA-364-18 Visual inspection	Meets requirements of product drawing. No physical damage.

5.2 ELECTRICAL REQUIREMENTS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
2	Low Level Contact Resistance	EIA 364-23 Mate connectors: apply a maximum voltage of 20 mV and a current of 100 mA.	30 milliohms MAXIMUM
3	Insulation Resistance	EIA 364-21 Unmate & unmount connectors: apply a voltage of 500 VDC between adjacent terminals and between terminals to ground.	1000 Megohms MINIMUM
4	Dielectric Withstanding Voltage	EIA 364-20 Unmate connectors: apply a voltage of 500 volts VAC for 1 minute between adjacent terminals and between terminals to ground.	No breakdown; current leakage < 0.5 mA
5	Contact Capacitance	EIA-364-30 Test between adjacent circuits of unmated connector at 1 KHz. The object of this test is to detail a standard method to determine the capacitance between conductive elements of a USB connector.	2 pF Maximum per Contact

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
D	EC No: SH2007-0758 DATE: 2007/05/23	USB A TYPE PLUG CONNECTOR SMT TYPE	4 of 8
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-48037-001	Donic.Yang		



PRODUCT SPECIFICATION

6	Contact Current Rating	EIA 364-70 Method B When measured at an ambient temperature of 25°C. With Power applied to the contacts, the ΔT shall not exceed + applied to the contacts, the 30°C at any point in the USB connector under test The object of this test procedure is to detail a standard method to assess the current carrying capacity of mated USB connector contacts.	1.5A at 250Vac minimum & Temperature rise: +30°C MAXIMUM
---	-------------------------------	--	--

5.3 MECHANICAL REQUIREMENTS (continued)

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
7	Connector Mate and Unmate Forces	EIA 364-13 Mate and unmate connector (male to female) at maximum a rate of 12.5 mm (0.492 inch) per minute.	Mating Force : 35 N MAXIMUM
			Unmating Force : 10 N MINIMUM
8	Durability	EIA-364-09 Mate and unmate Connector assemblies for 1500 cycles at maximum rated of 200 cycles per hour.	1) Shall meet visual requirement, show no physical damage 2) 30 milliohms MAXIMUM
9	Vibration (Random)	EIA-364-09 Test Condition V Test Letter A Mate connectors and subject to 5.35 Gs RMS. For a period of 15 minutes in each of 3 mutually perpendicular axes.	1).No discontinuities of 1 us microsecond or longer duration 2).Shall meet visual requirement, show no physical damage. 3) 30 milliohms MAXIMUM

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
D	EC No: SH2007-0758 DATE: 2007/05/23	USB A TYPE PLUG CONNECTOR SMT TYPE	5 of 8
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-48037-001	Donic.Yang		



PRODUCT SPECIFICATION

10	Mechanical Shock	EIA 364-27 Test Condition H Subject mated connectors to 30G's half-sine shock pulses of 11ms duration. Three shocks in each direction applied along three mutually perpendicular planes, 18 total shock.	1).No discontinuities of 1 us microsecond or longer duration 2).Shall meet visual requirement, show no physical damage. 3) 30 milliohms MAXIMUM
11	Cable Pull-out Force	EIA 364-38 Test condition A Shall be measured with TENSION GAUGE or TENSION TESTER in same direction.	40 Newtons to the connector for 1 minute.


5.4 ENVIRONMENTAL REQUIREMENTS

TEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
12	Humidity	EIA 364-31 Test condition A method III Subject mated connectors to Duration : 168 hours temperature between -25°C to +65°C with 90 to 95% RH	1).Dielectric Withstanding Voltage: No Breakdown at 500 VAC 2).Insulation Resistance: 1000 Megohms MINIMUM 3).Visual: No Damage 4) 30 milliohms MAXIMUM
13	Shock (Thermal)	EIA 364-32, Test Condition I Subject mated connectors to ten cycles between -55°C to +85°C.	1).Dielectric Withstanding Voltage: No Breakdown at 500 VAC 2).Insulation Resistance: 1000 Megohms MINIMUM 3).Visual: No Damage 4) 30 milliohms MAXIMUM
14	Temperature Life	EIA 364-17 Test Condition 2 Method A Subject mated connectors to temperature life at 85°C for 500hours	1).30 milliohms MAXIMUM 2).Shall meet visual requirement, show no physical damage.
15	Mixed Flowing Gas	EIA 364-65 Class IIA Exposures Cl ₂ ;10±3 NO ₂ ; 200±50 H ₂ S;10±5 (ppb),SO ₂ ; 100±20 1). Mating Conditions : 5 days. 2). Unmated: 5 days Mated Temperature : 30±1°C, Humidity : 70±2%R.H.	1).Shall meet visual requirement, show no physical damage. 2).Shall meet requirements of additional tests 3). 30 milliohms MAXIMUM

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
D	EC No: SH2007-0758 DATE: 2007/05/23	USB A TYPE PLUG CONNECTOR SMT TYPE	6 of 8
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-48037-001	Donic.Yang		



PRODUCT SPECIFICATION

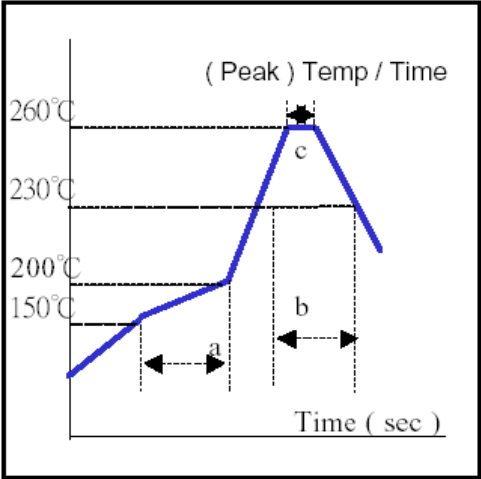16	Solderability	EIA 364-52 connector terminal tails in solder: (held at $245 \pm 5^{\circ}\text{C}$) up to 0.5mm from the bottom of the housing for 5 ± 0.5 sec.	The surface of the portion to be soldered shall at least 95% covered with new solder coating
17	Resistance To Soldering Heat	REFLOW SOLDERING : Pre-heat : $150 \sim 200^{\circ}\text{C}$ for 120 sec : 230°C 20~40sec REFLOW : $260 \pm 5^{\circ}\text{C}$ 10sec 	No mechanical defect on housing or other parts

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
D	EC No: SH2007-0758 DATE: 2007/05/23	USB A TYPE PLUG CONNECTOR SMT TYPE	7 of 8
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-48037-001	Donic.Yang		



PRODUCT SPECIFICATION

6.0 PRODUCT Qualification and Requalification Test Sequence


TEST SEQUENCES IDENTIFICATION

Test Group		Sample Groups						
Item	Test Description	A	B	C	D	E	F	G
1	Examination of product	1 10	1 5	1 7	1 9	1 3	1 3	1 3
2	Low Level Contact Resistance	3 7	2 4	2 4 6				
3	Insulation Resistance				3 7			
4	Dielectric Withstanding Voltage				4 8			
5	Contact Capacitance				2			
6	Contact Current Rating						2	
7	Mating & Unmating Force	2 8						
8	Durability	4						
9	Random Vibration	6						
10	Mechanical Shock	5						
11	Cable Pull-out Force	9						
12	Humidity				5			
13	Thermal Shock				6			
14	Temperature Life		3					
15	Mixed Flowing Gas			3 5				
16	Solderability					2		
17	Resistance to solder heat							2
Number of Test Samples (Minimum)		8	8	8	8	8	8	8

Note:

- Samples shall be prepare in accordance with applicable manufacture's instructions and shall be selected at random from current production.
- Precondition samples with 3 cycles durability.
- All the tests shall be performed in the sequence.

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
D	EC No: SH2007-0758 DATE: 2007/05/23	USB A TYPE PLUG CONNECTOR SMT TYPE	8 of 8
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-48037-001	Donic.Yang		

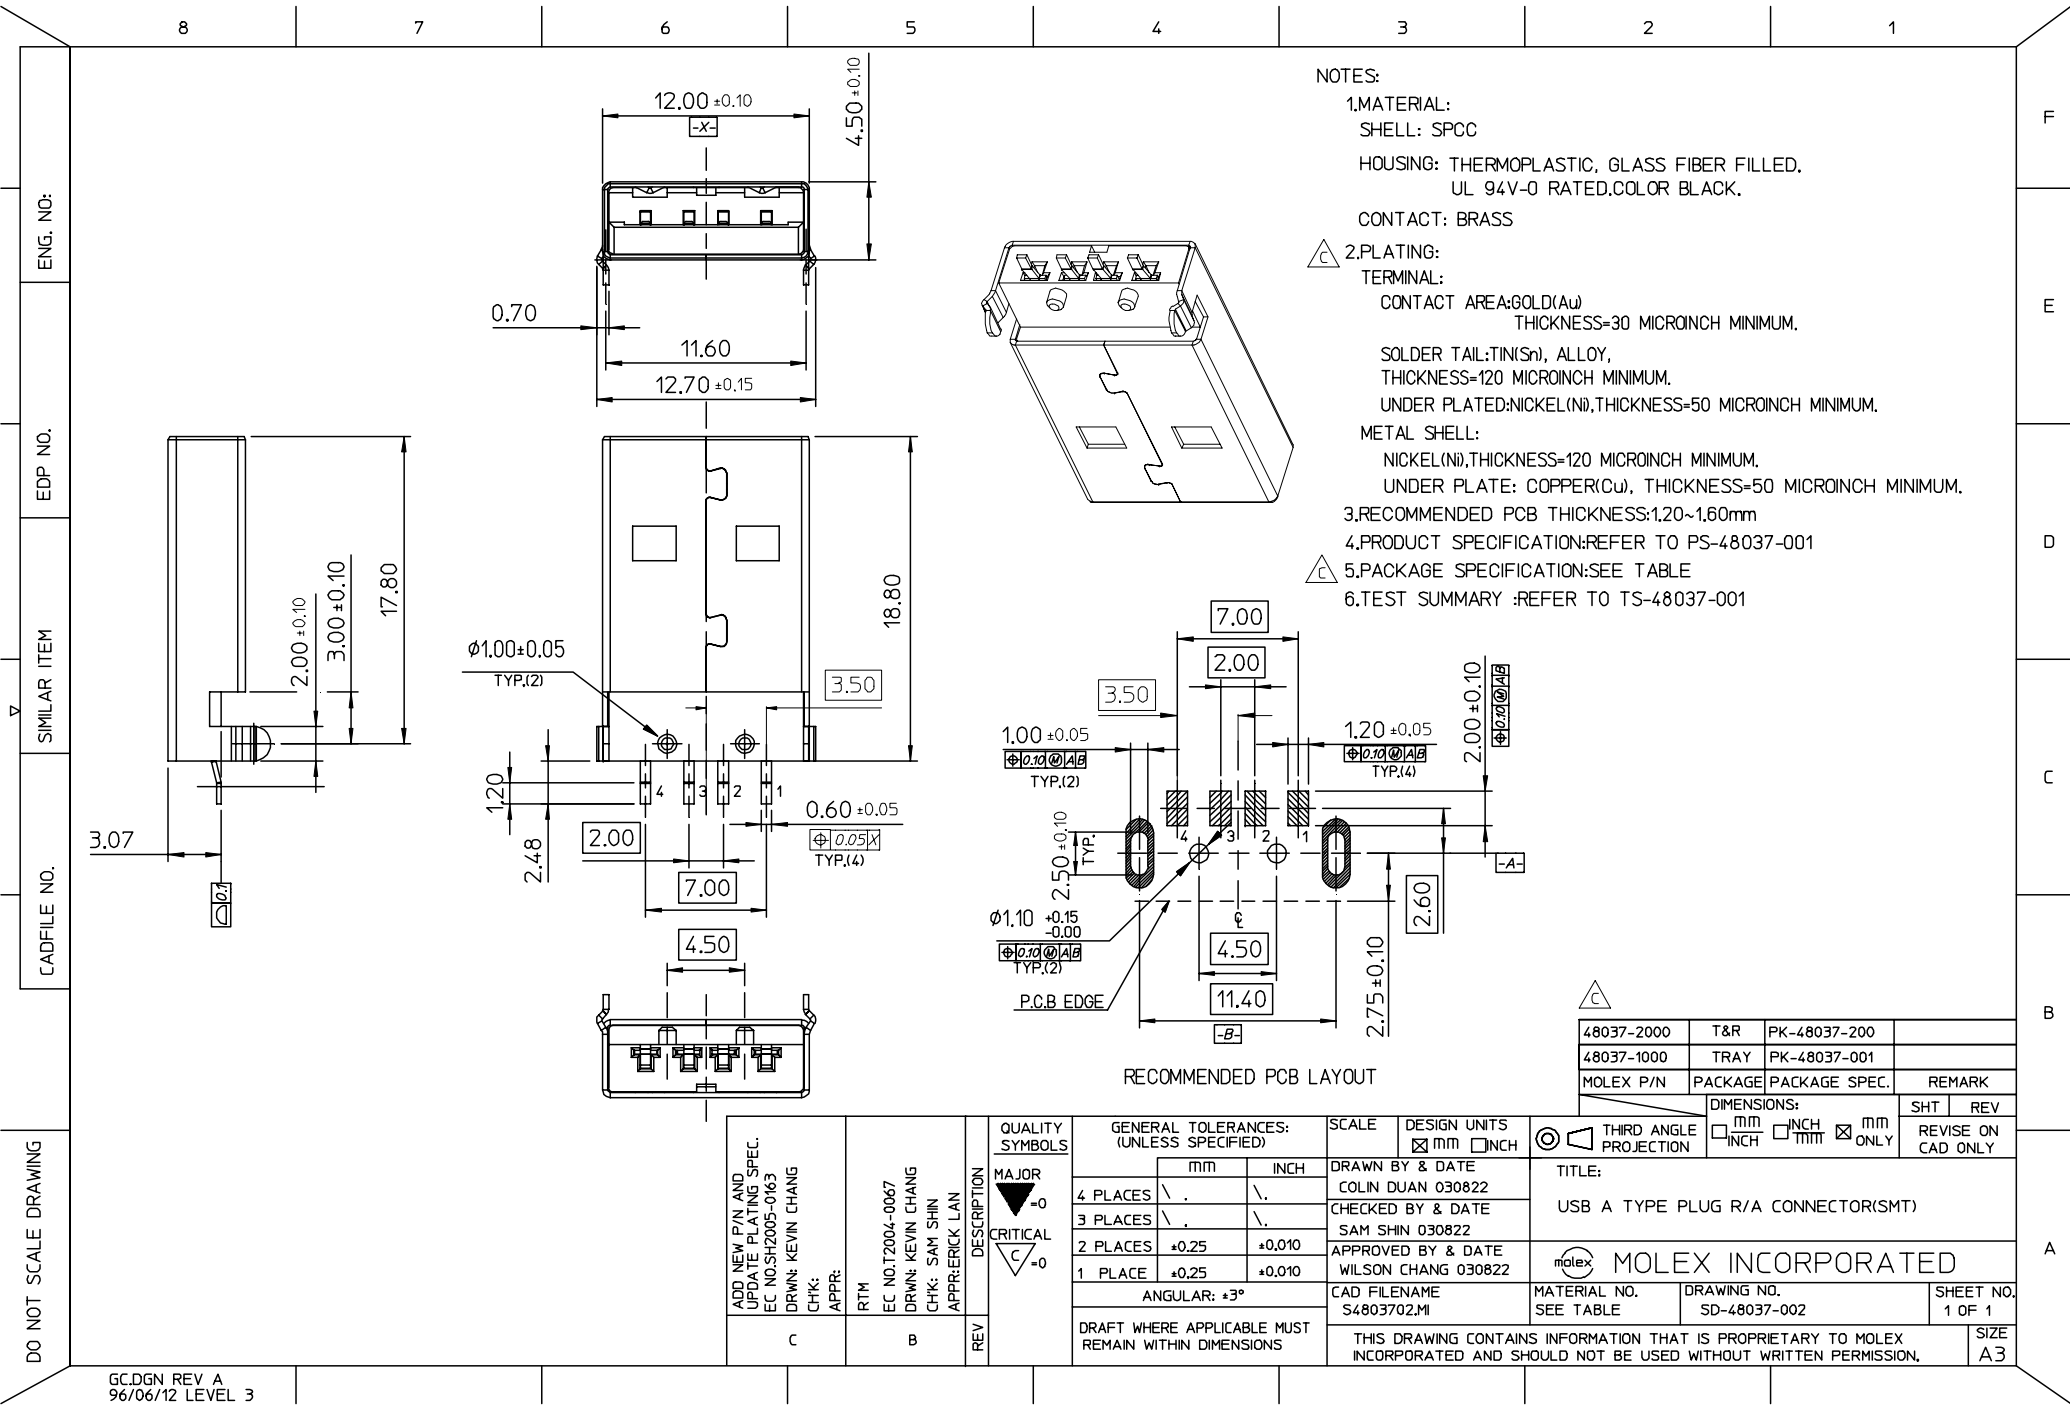

NOTES:

- 1.MATERIAL:
SHELL: SPCC
HOUSING: THERMOPLASTIC, GLASS FIBER FILLED,
UL 94V-0 RATED.COLOR BLACK.
CONTACT: BRASS
- 2.PLATING:
TERMINAL:
CONTACT AREA:GOLD(Au)
THICKNESS=30 MICROINCH MINIMUM.
SOLDER TAIL:TIN(Sn), ALLOY,
THICKNESS=120 MICROINCH MINIMUM.
UNDER PLATED:NICKEL(Ni),THICKNESS=50 MICROINCH MINIMUM.
METAL SHELL:
NICKEL(Ni),THICKNESS=120 MICROINCH MINIMUM.
UNDER PLATE: COPPER(Cu), THICKNESS=50 MICROINCH MINIMUM.
- 3.RECOMMENDED PCB THICKNESS:1.20~1.60mm
4.PRODUCT SPECIFICATION:REFER TO PS-48037-001
5.PACKAGE SPECIFICATION:SEE TABLE
6.TEST SUMMARY :REFER TO TS-48037-001



48037-2000	T&R	PK-48037-200	
48037-1000	TRAY	PK-48037-001	
MOLEX P/N	PACKAGE	PACKAGE SPEC.	REMARK
DIMENSIONS:			
<input type="checkbox"/> mm	<input type="checkbox"/> mm	<input checked="" type="checkbox"/> mm	<input type="checkbox"/> mm
<input type="checkbox"/> INCH	<input type="checkbox"/> INCH	<input type="checkbox"/> INCH	<input type="checkbox"/> INCH
THIRD ANGLE PROJECTION			SHT REV
			REVISE ON CAD ONLY

TITLE:
USB A TYPE PLUG R/A CONNECTOR(SMT)

MOLEX INCORPORATED

CAD FILENAME: S4803702.MI
MATERIAL NO. SEE TABLE
DRAWING NO. SD-48037-002
SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

SIZE
A3

DO NOT SCALE DRAWING