



Photointerrupter Product Data Sheet

LTH-1650-01

Spec No.: DS-55-95-0009

Effective Date: 01/06/2001

Revision: B

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4


FEATURES

- * FOCAL DISTANCE: 3 mm.
- * INFRARED RAY CUT-OFF TYPE.

APPLICATION

- * PRINTER
- * FAX
- * OPTOELECTRONIC SWITCHES

PACKAGE DIMENSIONS

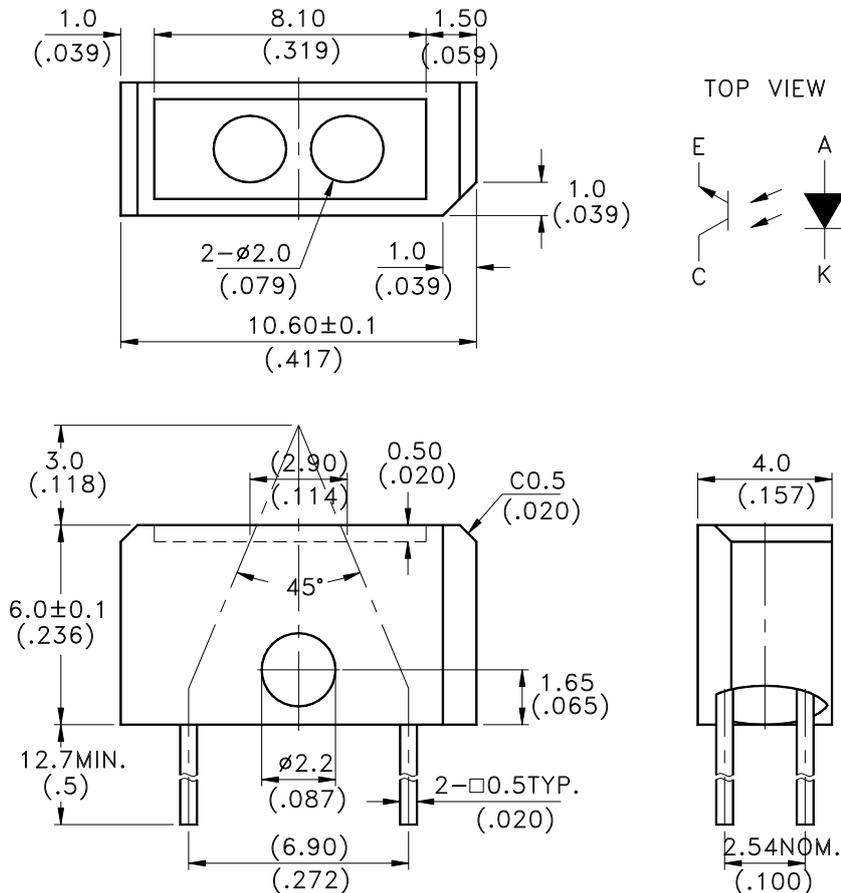

NOTES:


1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 mm ($.010$ ") unless otherwise noted.

ABSOLUTE MAXIMUM RATINGS AT TA=25°C

PARAMETER	SYMBOL	MAXIMUM RATING	UNIT
INPUT LED			
Power Dissipation	P_D	75	mW
Peak Forward Current (300 pps , 10 μ S pulse)	I_{CP}	1	A
Continuous Forward Current	I_F	60	mA
Reverse Voltage	V_R	5	V
OUTPUT PHOTOTRANSISTOR			
Power Dissipation	P_C	100	mW
Collector-Emitter Voltage	V_{CEO}	30	V
Emitter-Collector Voltage	V_{ECO}	5	V
Collector Current	I_C	20	mA
Operating Temperature Range	T_{opr}	-25°C to + 85°C	
Storage Temperature Range	T_{stg}	-40°C to + 100°C	
Lead Soldering Temperature [1.6mm (.063") Form Case]	T_S	260°C for 5 Seconds	

ELECTRICAL OPTICAL CHARACTERISTICS AT $T_A=25^\circ\text{C}$

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	
INPUT LED							
Forward Voltage	V_F		1.2	1.6	V	$I_F = 20\text{mA}$	
Reverse Current	I_R			100	μA	$V_R = 5\text{V}$	
OUTPUT PHOTOTRANSISTOR							
Collector-Emitter Dark Current	I_{CEO}			100	nA	$V_{CE} = 10\text{V}$	
COUPLER							
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$			0.4	V	$I_C = 0.05\text{mA}$ $I_F = 20\text{mA}$	
On State Collector Current	$I_{C(ON)}$	100		300	μA	$V_{CE} = 5\text{V}$ $I_F = 20\text{mA}$ $d = 3.0\text{mm}$	BIN A
		260		650		BIN B	
		400		1200		BIN C	
Response Time	Rise Time	T_R		3	μS	$V_{CE} = 5\text{V}$, $I_C = 2\text{mA}$ $R_L = 100\ \Omega$	
	Fall Time	T_F		4			20

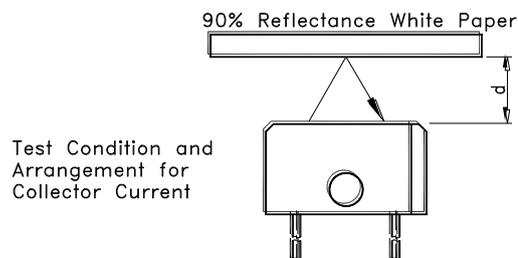

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTICS CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

Fig.1 Power Dissipation vs. Ambient Temperature

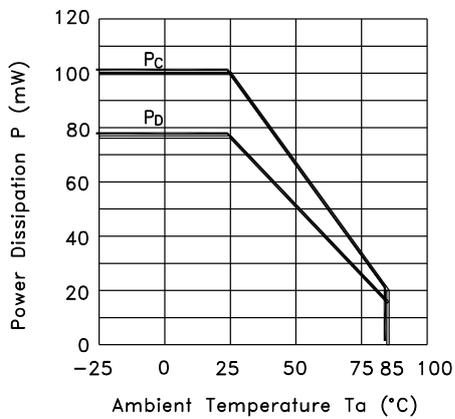


Fig.2 Forward Current vs. Forward Voltage

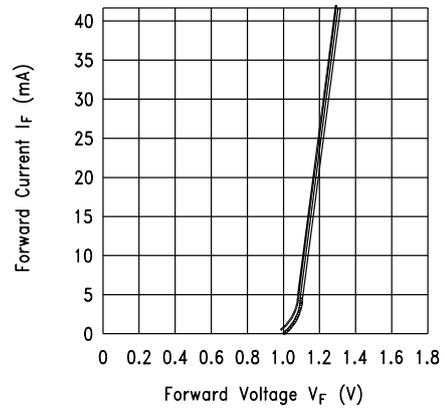


Fig.3 Collector Current vs. Collector-emitter Voltage


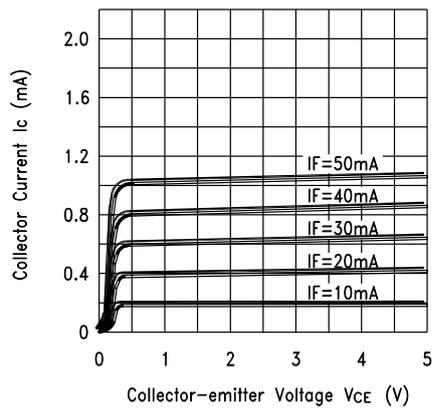


Fig.4 Collector Current vs. Ambient Temperature

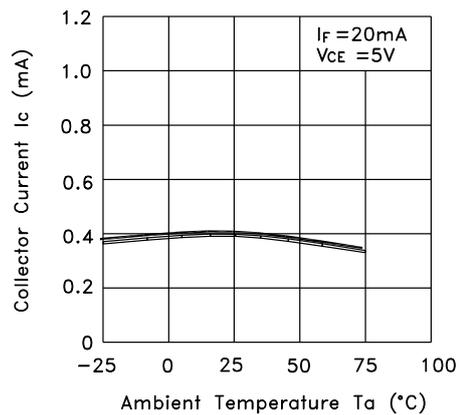

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTICS CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

Fig.5 Collector-emitter Saturation vs. Voltage Ambient Temperature

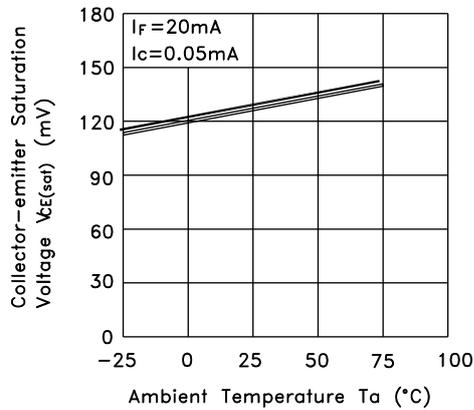


Fig.6 Relative Collector Current vs. Object Distance



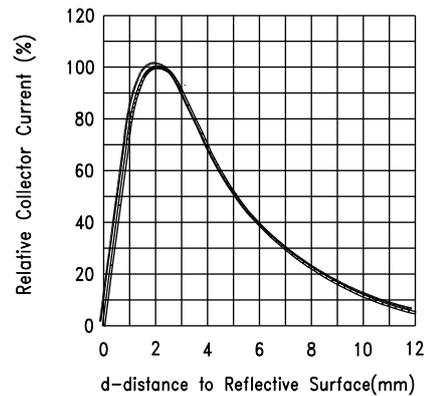


Fig.7 Response Time vs. Load Resistance

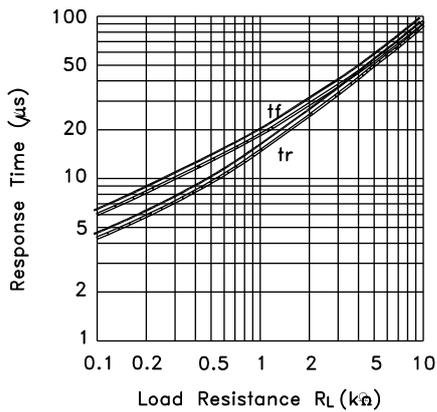

Test Circuit for Response Time

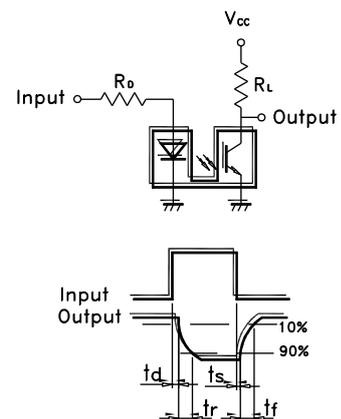

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lite-On:](#)

[LTH-1650-01](#)