


## Cool White LED Emitter

# LZC-00CW0R



### Key Features

- High Luminous Flux Density 12-die Cool White LED
- More than 40 Watt power dissipation capability
- Small foot print – 9.0mm x 9.0mm
- Industry lowest thermal resistance per package size (0.7°C/W)
- Surface mount ceramic package with integrated glass lens
- Spatial color uniformity across radiation pattern
- Excellent Color Rendering Index
- JEDEC Level 1 for Moisture Sensitivity Level
- Lead (Pb) free and RoHS compliant
- Reflow solderable (up to 6 cycles)
- Emitter available with several MCPCB options
- Full suite of TIR secondary optics family available

### Typical Applications

- General lighting
- Down lighting
- Architectural lighting
- Street lighting
- Stage and Studio lighting
- Refrigeration lighting
- Portable lighting

### Description

The LZC-series 12-die White LED emitter has an electrical input power dissipation capability of more than 40 Watt electrical power in an extremely small package. With a small 9.0mm x 9.0mm ultra-small footprint, this package provides exceptional luminous flux density. The high quality materials used in the package are chosen to minimize stresses and optimize light output which results in superior reliability and lumen maintenance. The robust product design thrives in outdoor applications with high ambient temperatures and high humidity.

## Part number options


### Base part number

| Part number     | Description                              |
|-----------------|------------------------------------------|
| LZC-00CW0R-xxxx | LZC emitter                              |
| LZC-70CW0R-xxxx | LZC emitter on 1 channel 1x12 Star MCPCB |
| LZC-C0CW0R-xxxx | LZC emitter on 2 channel 2x6 Star MCPCB  |

### Bin kit option codes

| CW, Cool-White (5000K – 6500K) |              |                                                |                                            |
|--------------------------------|--------------|------------------------------------------------|--------------------------------------------|
| Kit number suffix              | Min flux Bin | Color Bin Ranges                               | Description                                |
| 0055                           | B2           | 2U, 2Y, 3U, 2A, 2D, 3A, 2B, 2C, 3B, 2V, 2X, 3V | full distribution flux; 5500K ANSI CCT bin |
| 0065                           | B2           | 1U, 1A, 1B, 1V, 1Y, 1D, 1C, 1X, 2U, 2A, 2B, 2V | full distribution flux; 6500K ANSI CCT bin |

## Cool White Chromaticity Groups

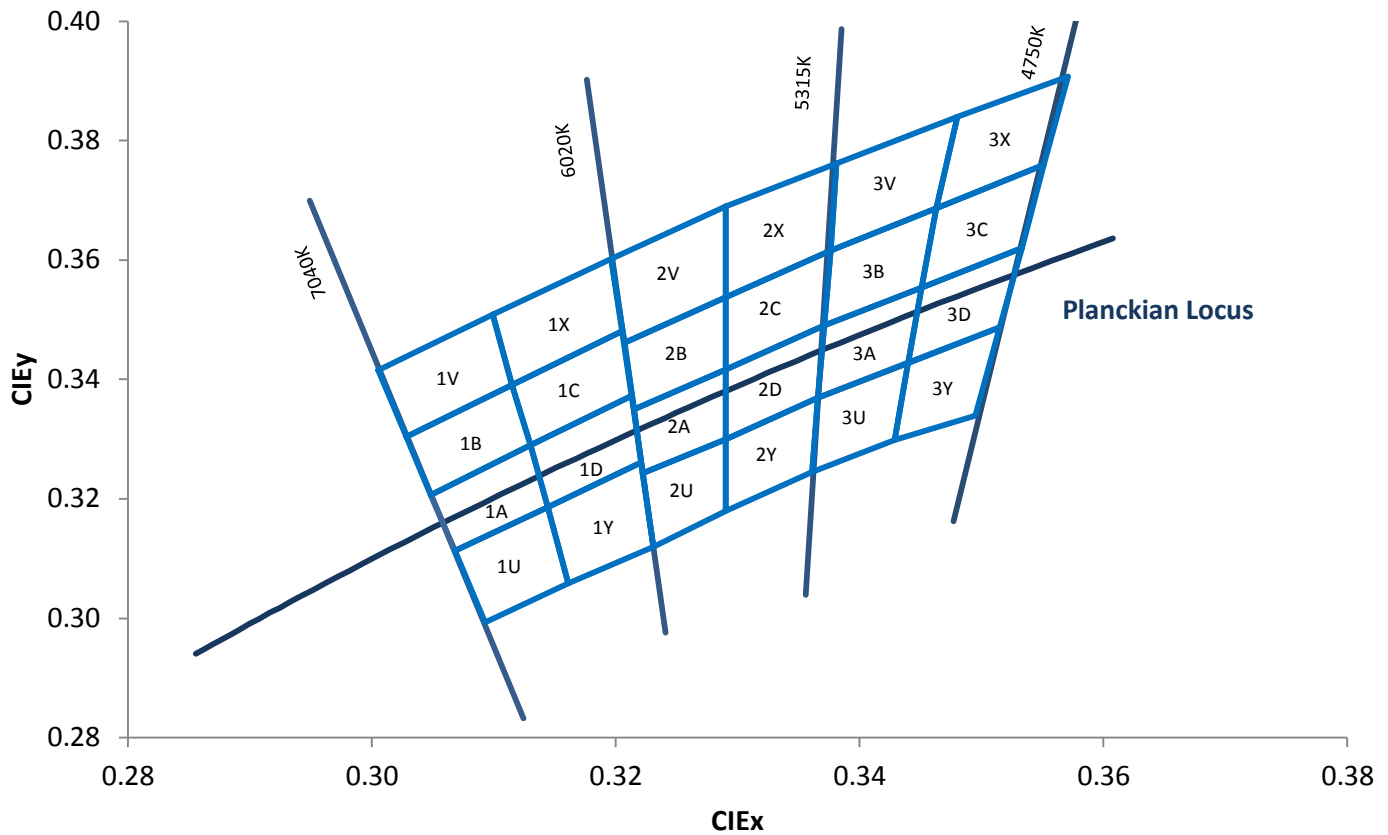

Standard Chromaticity Groups plotted on excerpt from the CIE 1931 (2°) x-y Chromaticity Diagram.  
Coordinates are listed below in the table.

## Cool White Bin Coordinates

| Bin code | CIEx   | CIEy   | Bin code | CIEx   | CIEy   | Bin code | CIEx   | CIEy   | Bin code | CIEx   | CIEy   |
|----------|--------|--------|----------|--------|--------|----------|--------|--------|----------|--------|--------|
| 1U       | 0.3068 | 0.3113 | 1A       | 0.3048 | 0.3207 | 1B       | 0.3028 | 0.3304 | 1V       | 0.3005 | 0.3415 |
|          | 0.3144 | 0.3186 |          | 0.313  | 0.329  |          | 0.3115 | 0.3391 |          | 0.3099 | 0.3509 |
|          | 0.3161 | 0.3059 |          | 0.3144 | 0.3186 |          | 0.313  | 0.329  |          | 0.3115 | 0.3391 |
|          | 0.3093 | 0.2993 |          | 0.3068 | 0.3113 |          | 0.3048 | 0.3207 |          | 0.3028 | 0.3304 |
| 1Y       | 0.3068 | 0.3113 | 1D       | 0.3048 | 0.3207 | 1C       | 0.3028 | 0.3304 | 1X       | 0.3005 | 0.3415 |
|          | 0.3144 | 0.3186 |          | 0.313  | 0.329  |          | 0.3115 | 0.3391 |          | 0.3099 | 0.3509 |
|          | 0.3221 | 0.3261 |          | 0.3213 | 0.3373 |          | 0.3205 | 0.3481 |          | 0.3196 | 0.3602 |
|          | 0.3231 | 0.312  |          | 0.3221 | 0.3261 |          | 0.3213 | 0.3373 |          | 0.3205 | 0.3481 |
| 2U       | 0.3161 | 0.3059 | 2A       | 0.3144 | 0.3186 | 2B       | 0.313  | 0.329  | 2V       | 0.3115 | 0.3391 |
|          | 0.3144 | 0.3186 |          | 0.313  | 0.329  |          | 0.3115 | 0.3391 |          | 0.3099 | 0.3509 |
|          | 0.3222 | 0.3243 |          | 0.3215 | 0.335  |          | 0.3207 | 0.3462 |          | 0.3196 | 0.3602 |
|          | 0.329  | 0.33   |          | 0.329  | 0.3417 |          | 0.329  | 0.3538 |          | 0.329  | 0.369  |
| 2Y       | 0.329  | 0.318  | 2D       | 0.329  | 0.33   | 2C       | 0.329  | 0.3417 | 2X       | 0.329  | 0.3538 |
|          | 0.3231 | 0.312  |          | 0.3222 | 0.3243 |          | 0.3215 | 0.335  |          | 0.3207 | 0.3462 |
|          | 0.3222 | 0.3243 |          | 0.3215 | 0.335  |          | 0.3207 | 0.3462 |          | 0.3196 | 0.3602 |
|          | 0.329  | 0.33   |          | 0.329  | 0.3417 |          | 0.329  | 0.3538 |          | 0.329  | 0.369  |
| 3U       | 0.3366 | 0.3369 | 3A       | 0.3371 | 0.349  | 3B       | 0.3376 | 0.3616 | 3V       | 0.3381 | 0.3762 |
|          | 0.344  | 0.3428 |          | 0.3451 | 0.3554 |          | 0.3463 | 0.3687 |          | 0.348  | 0.384  |
|          | 0.3429 | 0.3299 |          | 0.344  | 0.3427 |          | 0.3451 | 0.3554 |          | 0.3463 | 0.3687 |
|          | 0.3361 | 0.3245 |          | 0.3366 | 0.3369 |          | 0.3371 | 0.349  |          | 0.3376 | 0.3616 |
| 3Y       | 0.3366 | 0.3369 | 3D       | 0.3371 | 0.349  | 3C       | 0.3376 | 0.3616 | 3X       | 0.3381 | 0.3762 |
|          | 0.344  | 0.3428 |          | 0.3451 | 0.3554 |          | 0.3463 | 0.3687 |          | 0.348  | 0.384  |
|          | 0.3515 | 0.3487 |          | 0.3533 | 0.362  |          | 0.3551 | 0.376  |          | 0.3571 | 0.3907 |
|          | 0.3495 | 0.3339 |          | 0.3515 | 0.3487 |          | 0.3533 | 0.362  |          | 0.3551 | 0.376  |
|          | 0.3429 | 0.3299 |          | 0.344  | 0.3427 |          | 0.3451 | 0.3554 |          | 0.3463 | 0.3687 |
|          | 0.344  | 0.3428 |          | 0.3451 | 0.3554 |          | 0.3463 | 0.3687 |          | 0.348  | 0.384  |

## Luminous Flux Bins

Table 1:

| Bin Code | Minimum Luminous Flux ( $\Phi_v$ )<br>@ $I_F = 700\text{mA}$ <sup>[1,2]</sup><br>(lm) | Maximum Luminous Flux ( $\Phi_v$ )<br>@ $I_F = 700\text{mA}$ <sup>[1,2]</sup><br>(lm) | Typical Luminous Flux ( $\Phi_v$ )<br>@ $I_F = 1000\text{mA}$ <sup>[2]</sup><br>(lm) |
|----------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| B2       | 1,908                                                                                 | 2,120                                                                                 | 2,600                                                                                |
| C2       | 2,120                                                                                 | 2,350                                                                                 | 3,000                                                                                |
| D2       | 2,350                                                                                 | 2,600                                                                                 | 3,200                                                                                |
| E2       | 2,600                                                                                 | 2,900                                                                                 | 3,600                                                                                |
| F2       | 2,900                                                                                 | 3,200                                                                                 | 4,000                                                                                |

Notes for Table 1:

1. Luminous flux performance guaranteed within published operating conditions. LED Engin maintains a tolerance of  $\pm 10\%$  on flux measurements.
2. Luminous Flux typical value is for all 12 LED dice operating concurrently at rated current.

## Forward Voltage Bins

Table 2:

| Bin Code | Minimum Forward Voltage ( $V_F$ )<br>@ $I_F = 700\text{mA}$ <sup>[1,2]</sup><br>(V) | Maximum Forward Voltage ( $V_F$ )<br>@ $I_F = 700\text{mA}$ <sup>[1,2]</sup><br>(V) |
|----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 0        | 36.0                                                                                | 43.2                                                                                |

Notes for Table 2:

1. LED Engin maintains a tolerance of  $\pm 0.48\text{V}$  for forward voltage measurements.
2. Forward Voltage is binned with 12 LED dice connected in series. The actual LED is configured with two strings of 6 dice in series.

## Absolute Maximum Ratings

Table 3:

| Parameter                                                    | Symbol    | Value                                   | Unit        |
|--------------------------------------------------------------|-----------|-----------------------------------------|-------------|
| DC Forward Current at $T_{jmax}=130^{\circ}C$ <sup>[1]</sup> | $I_F$     | 1200                                    | mA          |
| DC Forward Current at $T_{jmax}=150^{\circ}C$ <sup>[1]</sup> | $I_F$     | 1000                                    | mA          |
| Peak Pulsed Forward Current <sup>[2]</sup>                   | $I_{FP}$  | 1500                                    | mA          |
| Reverse Voltage                                              | $V_R$     | See Note 3                              | V           |
| Storage Temperature                                          | $T_{stg}$ | -40 ~ +150                              | $^{\circ}C$ |
| Junction Temperature                                         | $T_J$     | 150                                     | $^{\circ}C$ |
| Soldering Temperature <sup>[4]</sup>                         | $T_{sol}$ | 260                                     | $^{\circ}C$ |
| Allowable Reflow Cycles                                      |           | 6                                       |             |
| ESD Sensitivity <sup>[5]</sup>                               |           | > 8,000 V HBM<br>Class 3B JESD22-A114-D |             |

Notes for Table 3:

- Maximum DC forward current (per die) is determined by the overall thermal resistance and ambient temperature. Follow the curves in Figure 10 for current derating.
- Pulse forward current conditions: Pulse Width  $\leq 10\text{msec}$  and Duty cycle  $\leq 10\%$ .
- LEDs are not designed to be reverse biased.
- Solder conditions per JEDEC 020D. See Reflow Soldering Profile Figure 5.
- LED Engin recommends taking reasonable precautions towards possible ESD damages and handling the LZ4-00CW40 in an electrostatic protected area (EPA). An EPA may be adequately protected by ESD controls as outlined in ANSI/ESD S6.1.

## Optical Characteristics @ $T_c = 25^{\circ}C$

Table 4:

| Parameter                                               | Symbol          | Typical | Unit    |
|---------------------------------------------------------|-----------------|---------|---------|
| Luminous Flux (@ $I_F = 700\text{mA}$ ) <sup>[1]</sup>  | $\Phi_V$        | 2350    | lm      |
| Luminous Flux (@ $I_F = 1000\text{mA}$ ) <sup>[1]</sup> | $\Phi_V$        | 3000    | lm      |
| Luminous Efficacy (@ $I_F = 350\text{mA}$ )             |                 | 112     | lm/W    |
| Correlated Color Temperature                            | CCT             | 5500    | K       |
| Color Rendering Index (CRI)                             | $R_a$           | >70     |         |
| Viewing Angle <sup>[2]</sup>                            | $2\theta_{1/2}$ | 110     | Degrees |

Notes for Table 4:

- Luminous flux typical value is for all 12 LED dice operating concurrently at rated current.
- Viewing Angle is the off-axis angle from emitter centerline where the luminous intensity is  $\frac{1}{2}$  of the peak value.

## Electrical Characteristics @ $T_c = 25^{\circ}C$

Table 5:

| Parameter                                                 | Symbol                    | Typical | Unit            |
|-----------------------------------------------------------|---------------------------|---------|-----------------|
| Forward Voltage (@ $I_F = 700\text{mA}$ ) <sup>[1]</sup>  | $V_F$                     | 37.8    | V               |
| Forward Voltage (@ $I_F = 1000\text{mA}$ ) <sup>[1]</sup> | $V_F$                     | 39.0    | V               |
| Temperature Coefficient of Forward Voltage <sup>[1]</sup> | $\Delta V_F / \Delta T_J$ | -33.6   | mV/ $^{\circ}C$ |
| Thermal Resistance (Junction to Case)                     | $R\theta_{J-C}$           | 0.7     | $^{\circ}C/W$   |

Notes for Table 5:

- Forward Voltage is binned with 12 LED dice connected in series. The actual LED is configured with two strings of 6 dice in series.

## IPC/JEDEC Moisture Sensitivity Level

Table 6 - IPC/JEDEC J-STD-20.1 MSL Classification:

| Level | Floor Life |                                      | Soak Requirements |                                 |             |            |
|-------|------------|--------------------------------------|-------------------|---------------------------------|-------------|------------|
|       | Time       | Conditions                           | Standard          | Conditions                      | Accelerated | Conditions |
| 1     | unlimited  | $\leq 30^{\circ}\text{C}/$<br>85% RH | 168<br>+5/-0      | $85^{\circ}\text{C}/$<br>85% RH | n/a         | n/a        |

Notes for Table 6:

1. The standard soak time includes a default value of 24 hours for semiconductor manufacturer's exposure time (MET) between bake and bag and includes the maximum time allowed out of the bag at the distributor's facility.

## Average Lumen Maintenance Projections

Lumen maintenance generally describes the ability of a lamp to retain its output over time. The useful lifetime for solid state lighting devices (Power LEDs) is also defined as Lumen Maintenance, with the percentage of the original light output remaining at a defined time period.

Based on long-term LM80 testing, LED Engin projects that the LZC Series will deliver, on average, 70% Lumen Maintenance at 70,000 hours of operation at a forward current of 700 mA per die. This projection is based on constant current operation with junction temperature maintained at or below 110°C.

## Mechanical Dimensions (mm)

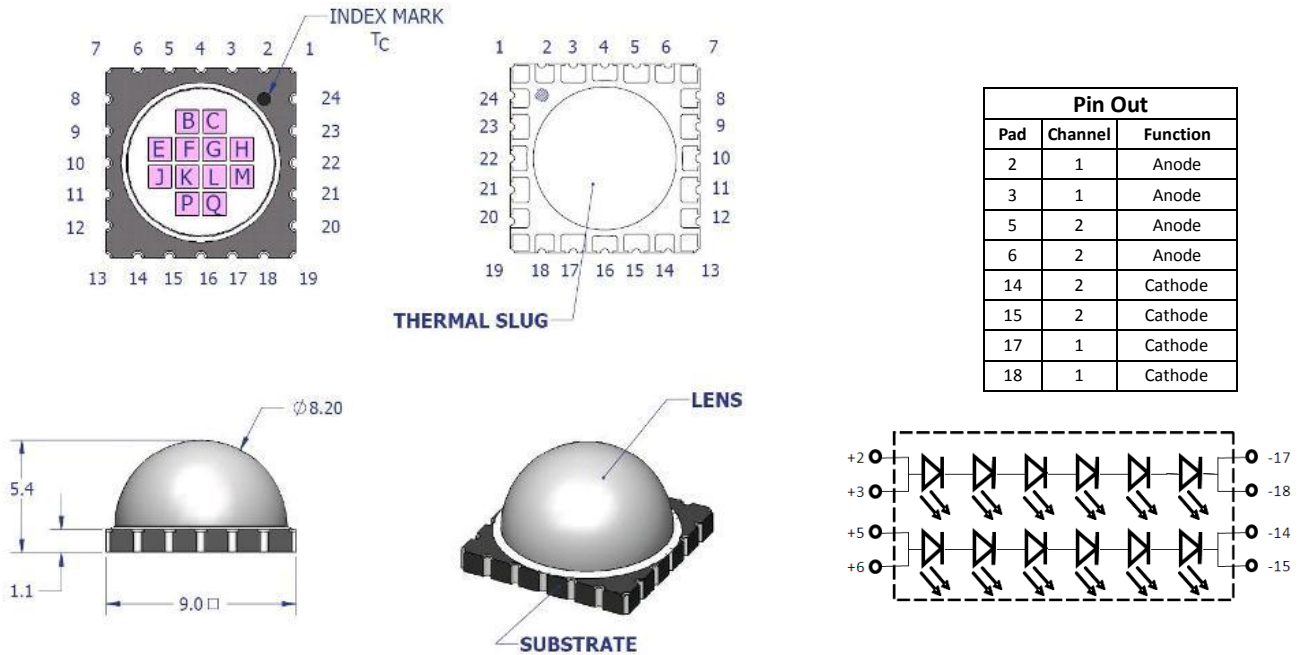


Figure 1: Package outline drawing.

### Notes for Figure 1:

1. LZC-00CW0R is compatible with MCPCB designed for LZC-00WW00, LZC-00NW00, and LZC-00CW00 when emitter is rotated 180 degree with respect to the LZC-00xW00 position on the MCPCB.
2. Index mark, Tc indicates case temperature measurement point.
3. Unless otherwise noted, the tolerance =  $\pm 0.20$  mm.
4. Thermal contact pad is electrically neutral.

## Recommended Solder Pad Layout (mm)

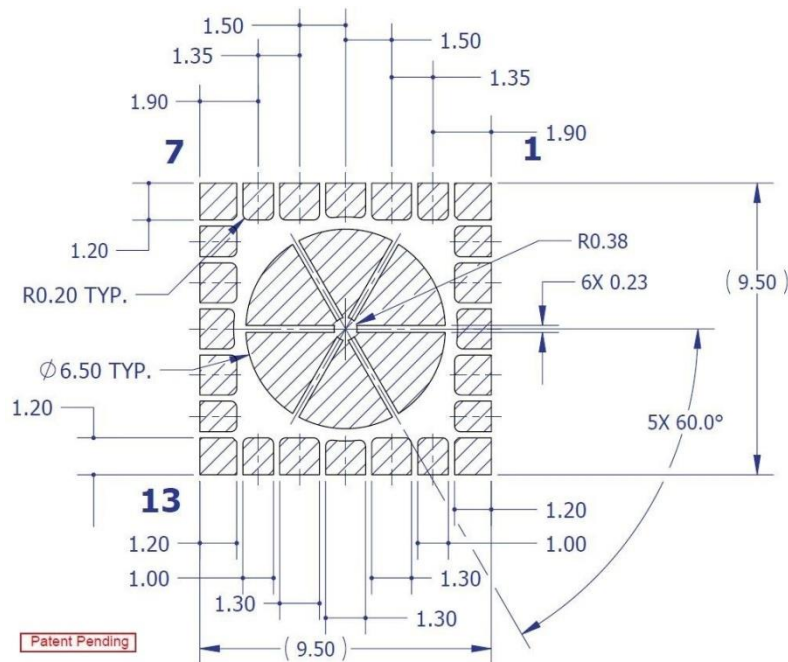


Figure 2a: Recommended solder pad layout for anode, cathode, and thermal pad.

### Note for Figure 2a:

1. Unless otherwise noted, the tolerance =  $\pm 0.20$  mm.





## Typical Radiation Pattern

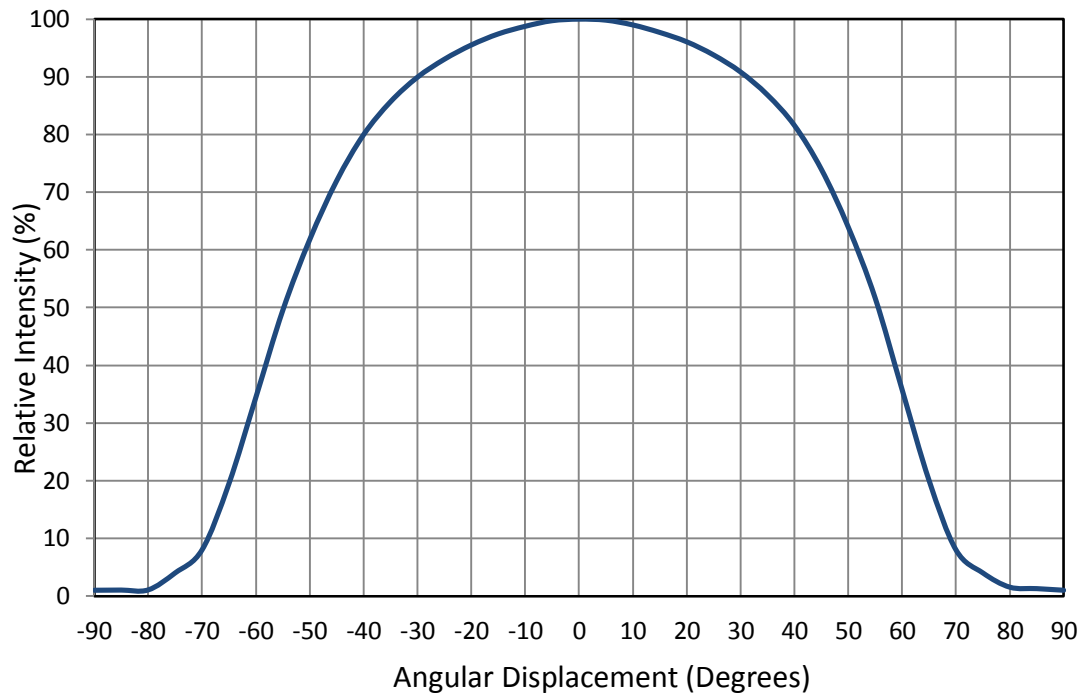


Figure 4: Typical representative spatial radiation pattern.

## Typical Relative Spectral Power Distribution

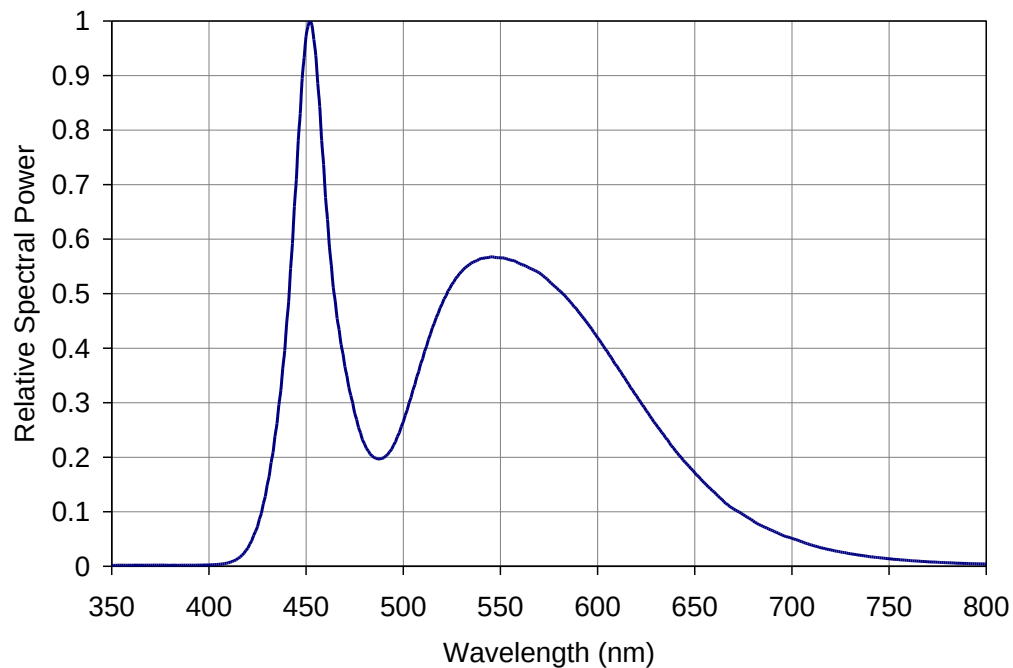


Figure 5: Typical relative spectral power vs. wavelength @  $T_c = 25^\circ\text{C}$ .

## Typical Relative Light Output over Forward Current

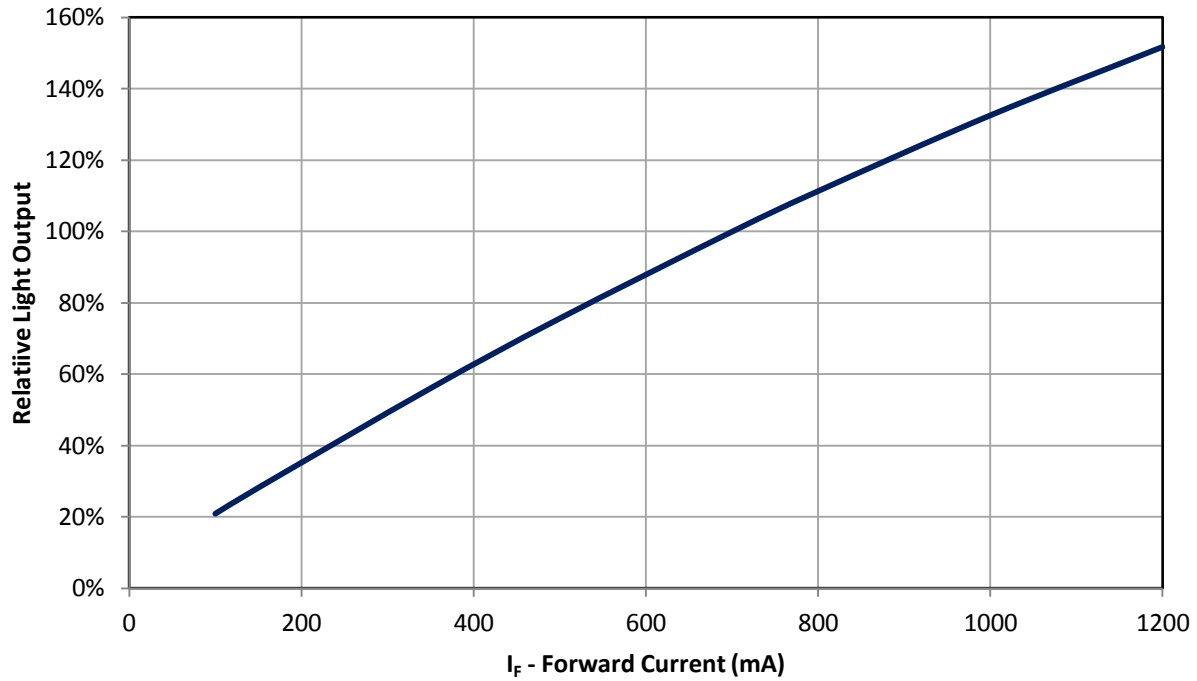


Figure 6: Typical relative light output vs. forward current @  $T_c = 25^\circ\text{C}$ .

Notes for Figure 6:

1. Luminous Flux typical value is for all 12 LED dice operating concurrently at rated current.

## Typical Relative Light Output over Temperature

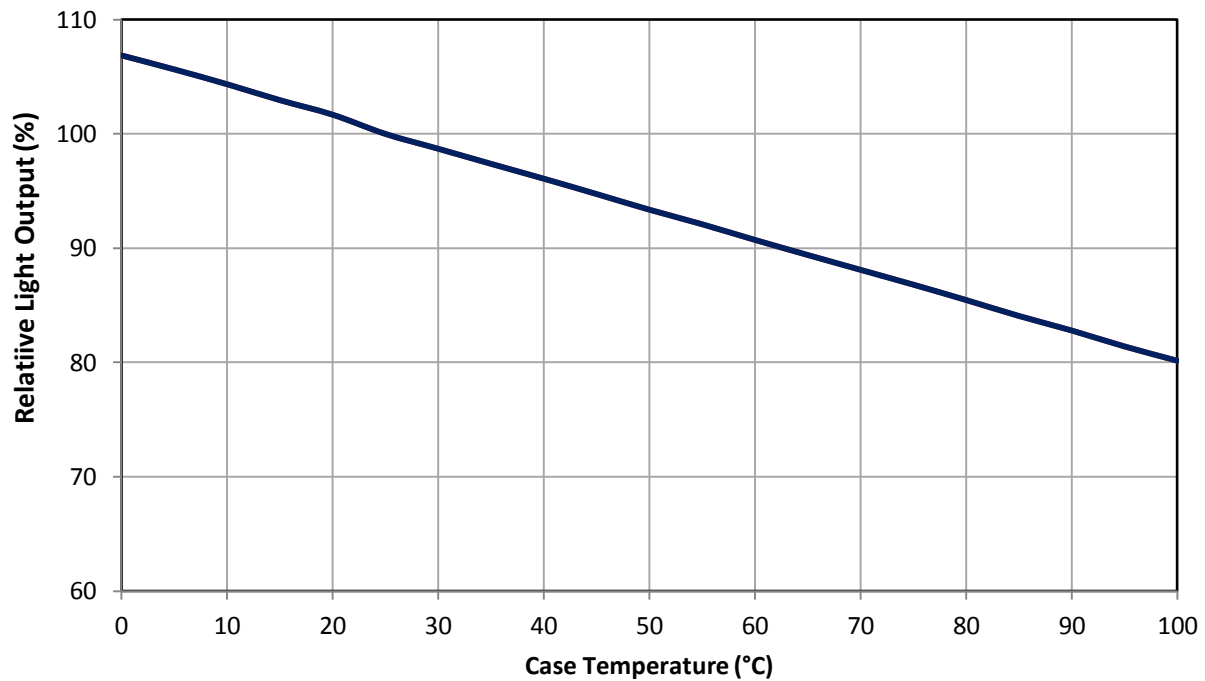


Figure 7: Typical relative light output vs. case temperature.

Notes for Figure 7:

1. Luminous Flux typical value is for all 12 LED dice operating concurrently at rated current.

## Typical Forward Current Characteristics

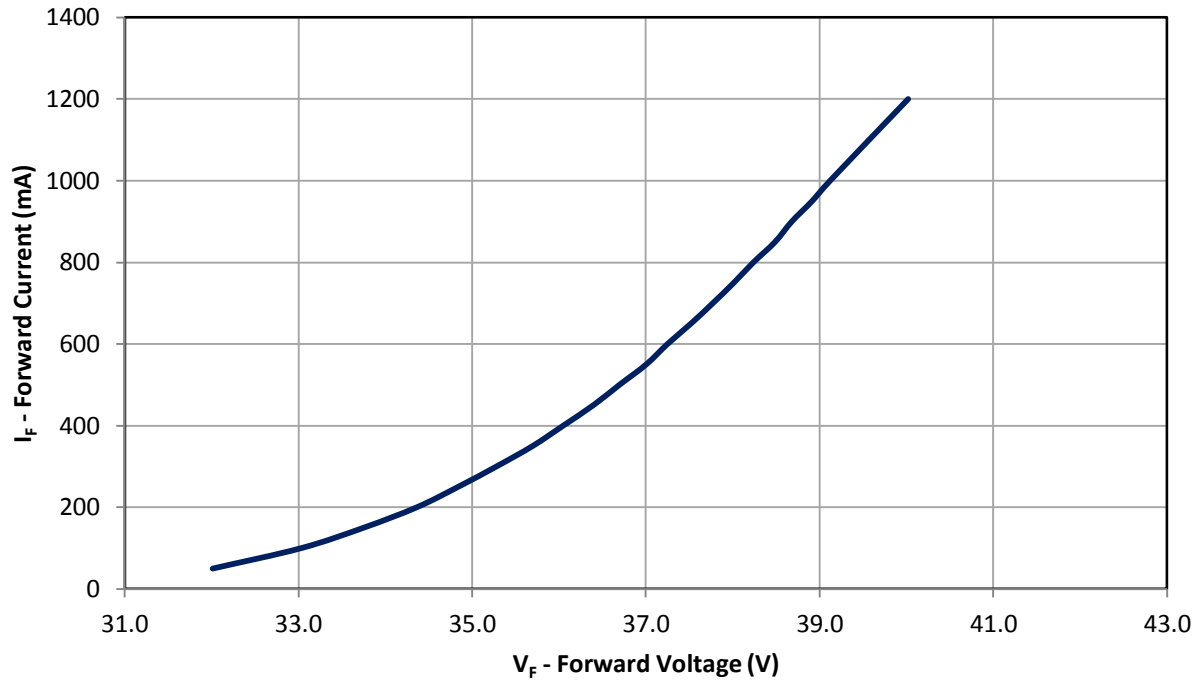


Figure 8: Typical forward current vs. forward voltage @ T<sub>C</sub> = at 25°C.

Note for Figure 8:

1. Forward Voltage assumes 12 LED dice connected in series. The actual LED is configured with two strings of 6 dice in series.

## Current De-rating

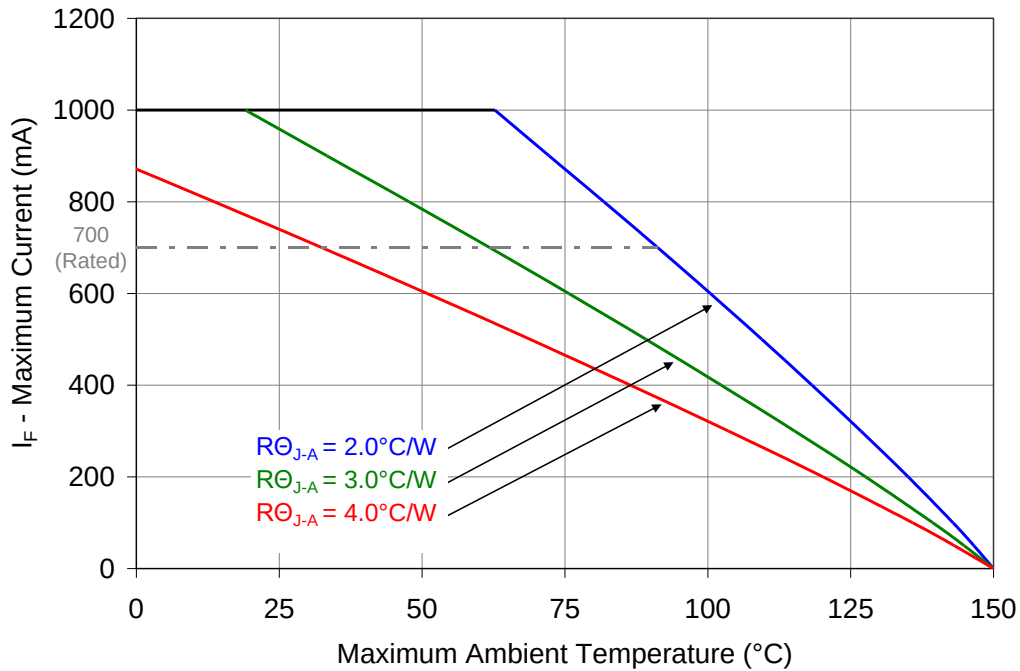


Figure 9: Maximum forward current vs. ambient temperature based on T<sub>J(MAX)</sub> = 150°C.

Notes for Figure 9:

1. Maximum current assumes that all LED dice are operating concurrently at the same current.
2. R<sub>θJC</sub> [Junction to Case Thermal Resistance] for the LZC-00CW0R is typically 0.7°C/W.
3. R<sub>θJA</sub> [Junction to Ambient Thermal Resistance] = R<sub>θJC</sub> + R<sub>θCA</sub> [Case to Ambient Thermal Resistance].

## Emitter Tape and Reel Specifications (mm)

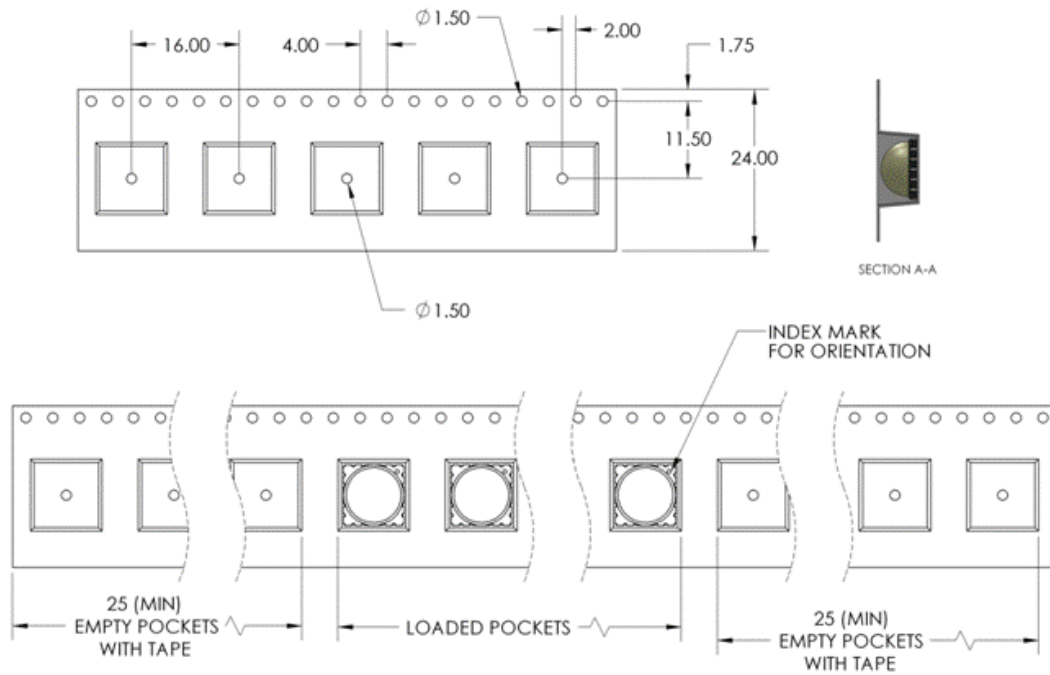


Figure 10: Emitter carrier tape specifications (mm).

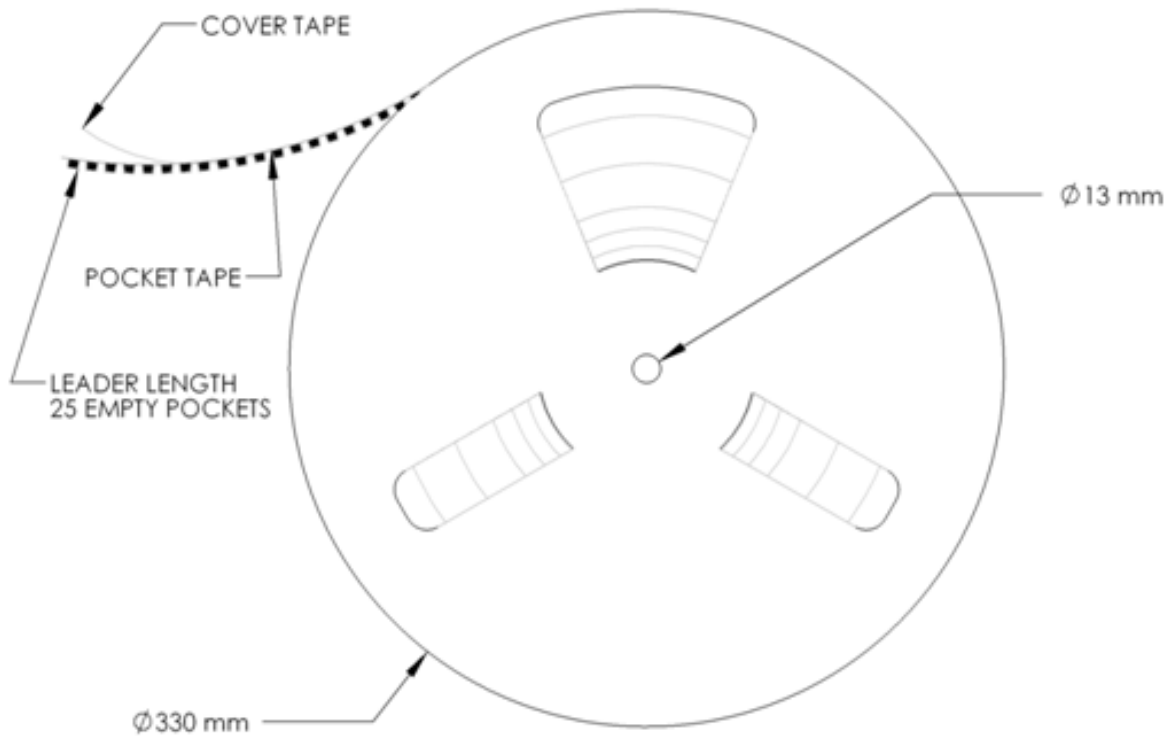


Figure 11: Emitter Reel specifications (mm).

# LZC MCPCB Family

| Part number       | Type of MCPCB | Diameter (mm) | Emitter + MCPCB Thermal Resistance (°C/W) | Typical $V_f$ (V) | Typical $I_f$ (mA) |
|-------------------|---------------|---------------|-------------------------------------------|-------------------|--------------------|
| <b>LZC-7xxxxx</b> | 1-channel     | 28.3          | $0.7 + 0.6 = 1.3$                         | 37.8              | 700                |
| <b>LZC-Cxxxxx</b> | 2-channel     | 28.3          | $0.7 + 0.6 = 1.3$                         | 18.9              | 2 x 700            |

## Mechanical Mounting of MCPCB

- MCPCB bending should be avoided as it will cause mechanical stress on the emitter, which could lead to substrate cracking and subsequently LED dies cracking.
- To avoid MCPCB bending:
  - Special attention needs to be paid to the flatness of the heat sink surface and the torque on the screws.
  - Care must be taken when securing the board to the heat sink. This can be done by tightening three M3 screws (or #4-40) in steps and not all the way through at once. Using fewer than three screws will increase the likelihood of board bending.
  - It is recommended to always use plastics washers in combinations with the three screws.
  - If non-taped holes are used with self-tapping screws, it is advised to back out the screws slightly after tightening (with controlled torque) and then re-tighten the screws again.

## Thermal interface material


- To properly transfer heat from LED emitter to heat sink, a thermally conductive material is required when mounting the MCPCB on to the heat sink.
- There are several varieties of such material: thermal paste, thermal pads, phase change materials and thermal epoxies. An example of such material is Electrolube EHTC.
- It is critical to verify the material's thermal resistance to be sufficient for the selected emitter and its operating conditions.

## Wire soldering

- To ease soldering wire to MCPCB process, it is advised to preheat the MCPCB on a hot plate of 125-150°C. Subsequently, apply the solder and additional heat from the solder iron will initiate a good solder reflow. It is recommended to use a solder iron of more than 60W.
- It is advised to use lead-free, no-clean solder. For example: SN-96.5 AG-3.0 CU 0.5 #58/275 from Kester (pn: 24-7068-7601)

# LZC-7xxxxx

## 1-Channel MCPCB Mechanical Dimensions (mm)

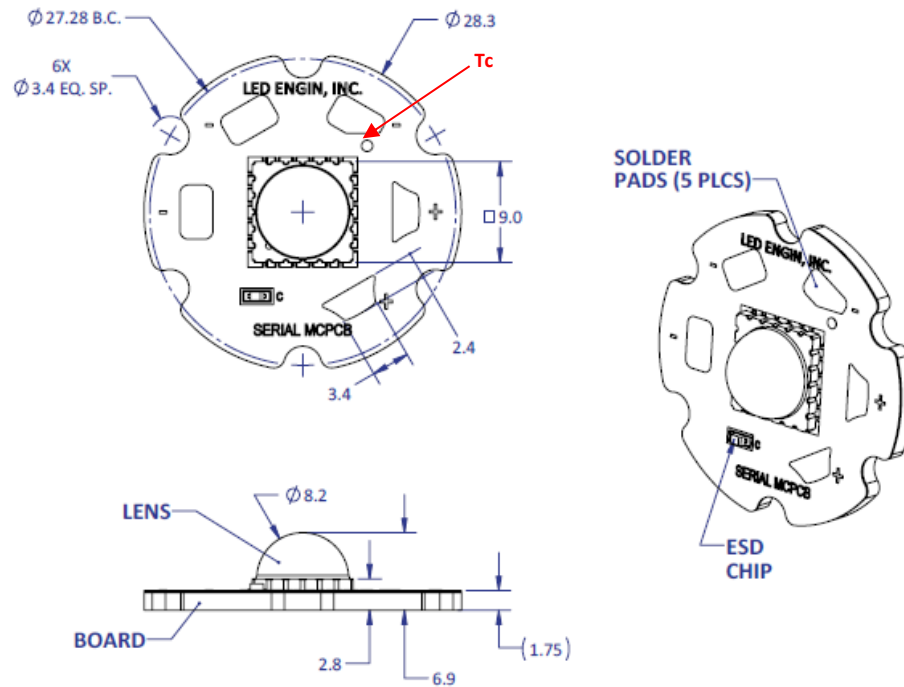


### Notes:

- Unless otherwise noted, the tolerance =  $\pm 0.2$  mm.
- Slots in MCPCB are for M3 or #4-40 mounting screws.
- LED Engin recommends plastic washers to electrically insulate screws from solder pads and electrical traces.
- Electrical connection pads on MCPCB are labeled "+" for Anode and "-" for Cathode.
- LED Engin recommends using thermal interface material when attaching the MCPCB to a heatsink.
- The thermal resistance of the MCPCB is:  $R_{\theta C-B} 0.6^{\circ}\text{C/W}$

## Components used


MCPCB: HT04503 (Bergquist)  
ESD chips: BZX585-C51 (NPX, for 12 LED dies in series)

| Pad layout |           |            |           |
|------------|-----------|------------|-----------|
| Ch.        | MCPCB Pad | String/die | Function  |
| 1          | +         | 1/BCEFGHJ  | Anode +   |
|            | -         | KLMPQ      | Cathode - |

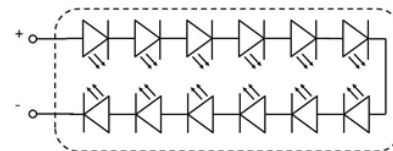

# LZC-Cxxxxx

## 2 channel, Star MCPCB (2x6) Dimensions (mm)

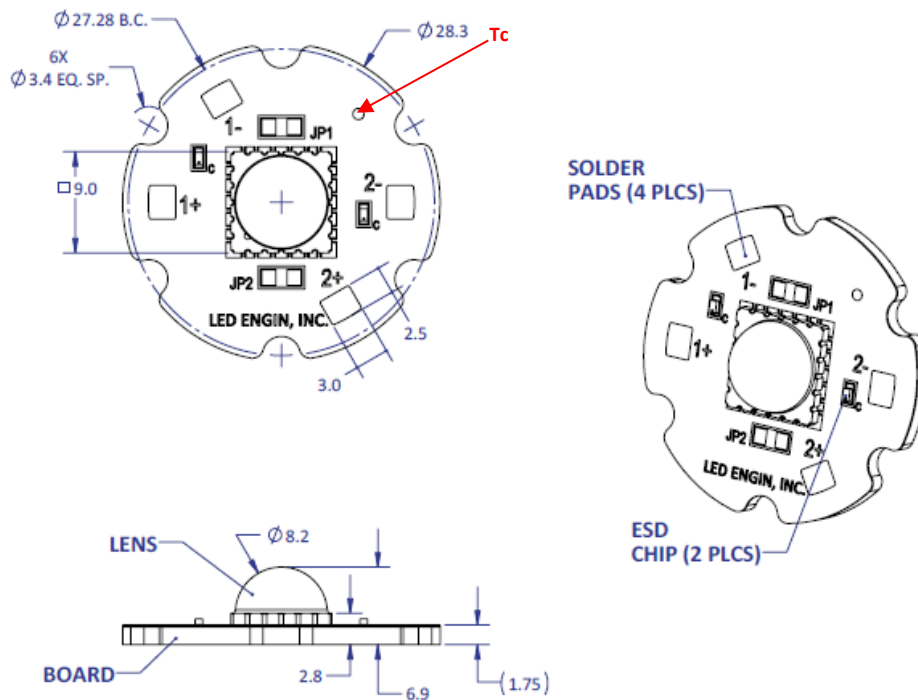


### Notes:

- Unless otherwise noted, the tolerance =  $\pm 0.2$  mm.
- Slots in MCPCB are for M3 or #4-40 mounting screws.
- LED Engin recommends plastic washers to electrically insulate screws from solder pads and electrical traces.
- Electrical connection pads on MCPCB are labeled "+" for Anode and "-" for Cathode.
- LED Engin recommends thermal interface material when attaching the MCPCB to a heatsink.
- The thermal resistance of the MCPCB is: R $\theta$ C-B 0.6°C/W

## Components used

MCPCB: HT04503 (Bergquist)  
ESD chips: BZT52C36LP (NPX, for 6 LED dies in series)

| Pad layout |           |            |           |
|------------|-----------|------------|-----------|
| Ch.        | MCPCB Pad | String/die | Function  |
| 1          | 1+        | 1/JKLMPQ   | Anode +   |
|            | 1-        |            | Cathode - |
| 2          | 2+        | 2/BCEFGH   | Anode +   |
|            | 2-        |            | Cathode - |

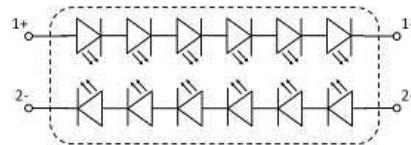



## Company Information

LED Engin, based in California's Silicon Valley, develops, manufactures, and sells advanced LED emitters, optics and light engines to create uncompromised lighting experiences for a wide range of entertainment, architectural, general lighting and specialty applications. LuxiGen™ multi-die emitter and secondary lens combinations reliably deliver industry-leading flux density, upwards of 5000 quality lumens to a target, in a wide spectrum of colors including whites, tunable whites, multi-color and UV LEDs in a unique patented compact ceramic package. Our LuxiTune™ series of tunable white lighting modules leverage our LuxiGen emitters and lenses to deliver quality, control, freedom and high density tunable white light solutions for a broad range of new recessed and downlighting applications. The small size, yet remarkably powerful beam output and superior in-source color mixing, allows for a previously unobtainable freedom of design wherever high-flux density, directional light is required.

LED Engin is committed to providing products that conserve natural resources and reduce greenhouse emissions.

LED Engin reserves the right to make changes to improve performance without notice.

Please contact [sales@ledengin.com](mailto:sales@ledengin.com) or (408) 922-7200 for more information.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## LED Engin:

[LZC-00CW0R-0055](#) [LZC-C0CW0R-0065](#) [LZC-70CW0R-0065](#) [LZC-00CW0R-0065](#) [LZC-00CW0R-0000](#) [LZC-C0CW0R-0055](#) [LZC-70CW0R-0055](#) [LZC-00CW0R-0050](#) [LZC-00CW0R-0056](#)