
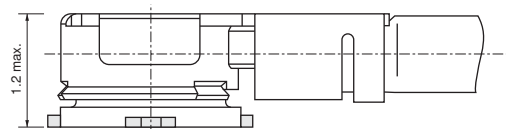


# Microwave Coaxial Connectors

## Microwave Coaxial Cable Connectors



MM4829-2702

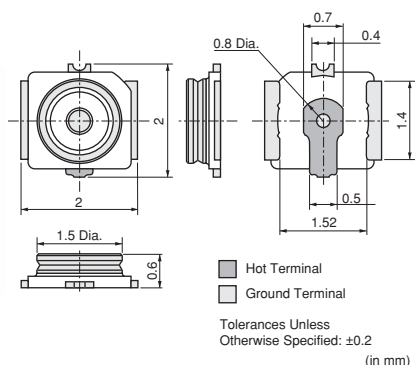

(in mm)

Dimensions

MM5829-2700

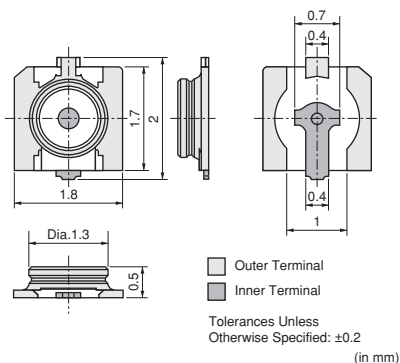

(in mm)

Dimensions


Part Number	Rated Voltage (Vrms)	Frequency Rating (GHz)	Temperature Range	VSWR
MM4829-2702	30	to 6.0	-40 to +85°C	1.3 max. (DC to 3GHz)
MM5829-2700	30	to 12	-40 to +85°C	1.3 max. (DC to 3GHz)
MXHP32	30	to 6.0	-40 to +85°C	1.3 max. (DC to 3GHz)
MXJA01	30	to 12	-40 to +85°C	1.3 max. (DC to 3GHz)

Impedance: 50ohm



☐ Continued from the preceding page.

**Measurement Probe for MM8930-2600  
 (P/N: MXHQ87PA3000)**

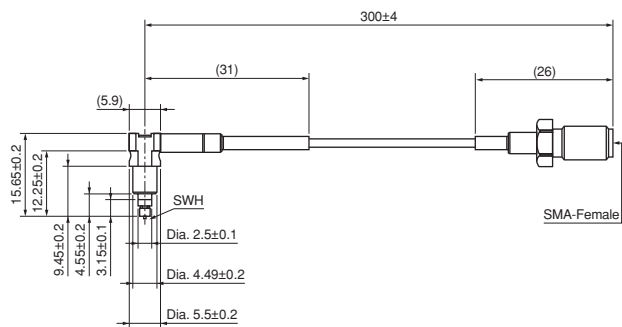

(in mm)

Part Number	Rated Voltage (Vrms)	Frequency Rating (GHz)	Temperature Range	VSWR
<b>MM8030-2610</b>	30	to 11	-40 to +85°C	1.2 max. (DC to 3GHz)
<b>MM8130-2600</b>	30	to 6	-40 to +85°C	1.2 max. (DC to 3GHz)
<b>MM8430-2610</b>	30	to 6	-40 to +85°C	1.2 max. (DC to 3GHz)
<b>MM8930-2600</b>	30	to 6	-40 to +85°C	1.2 max. (DC to 3GHz)

Impedance: 50ohm

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata:

[MM8030-2610RK0](#) [MXHQ87WJ3000](#)