

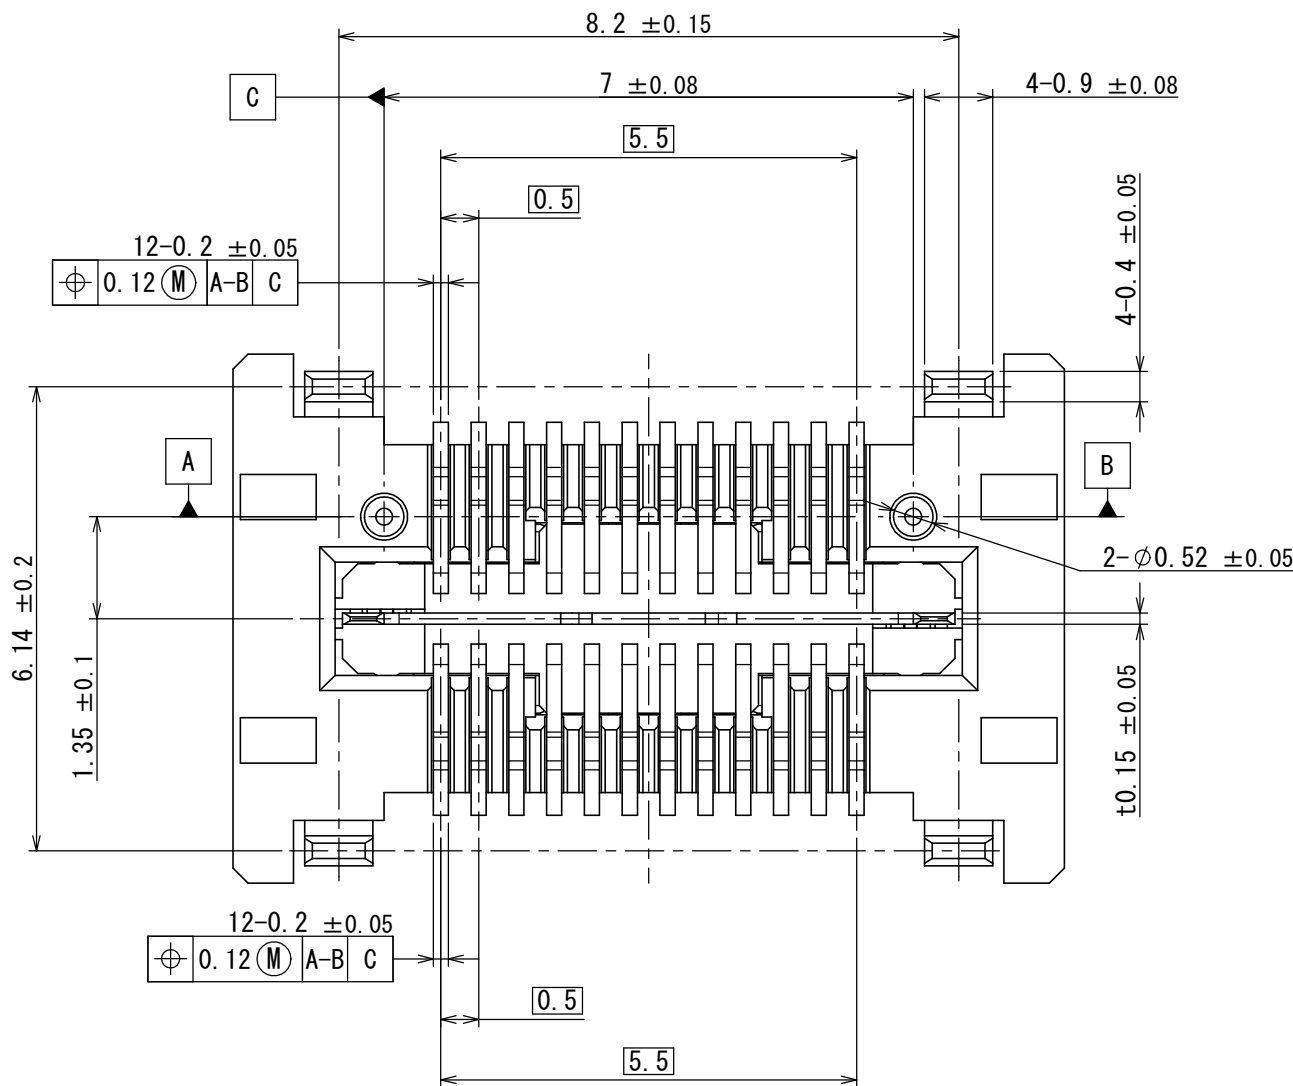
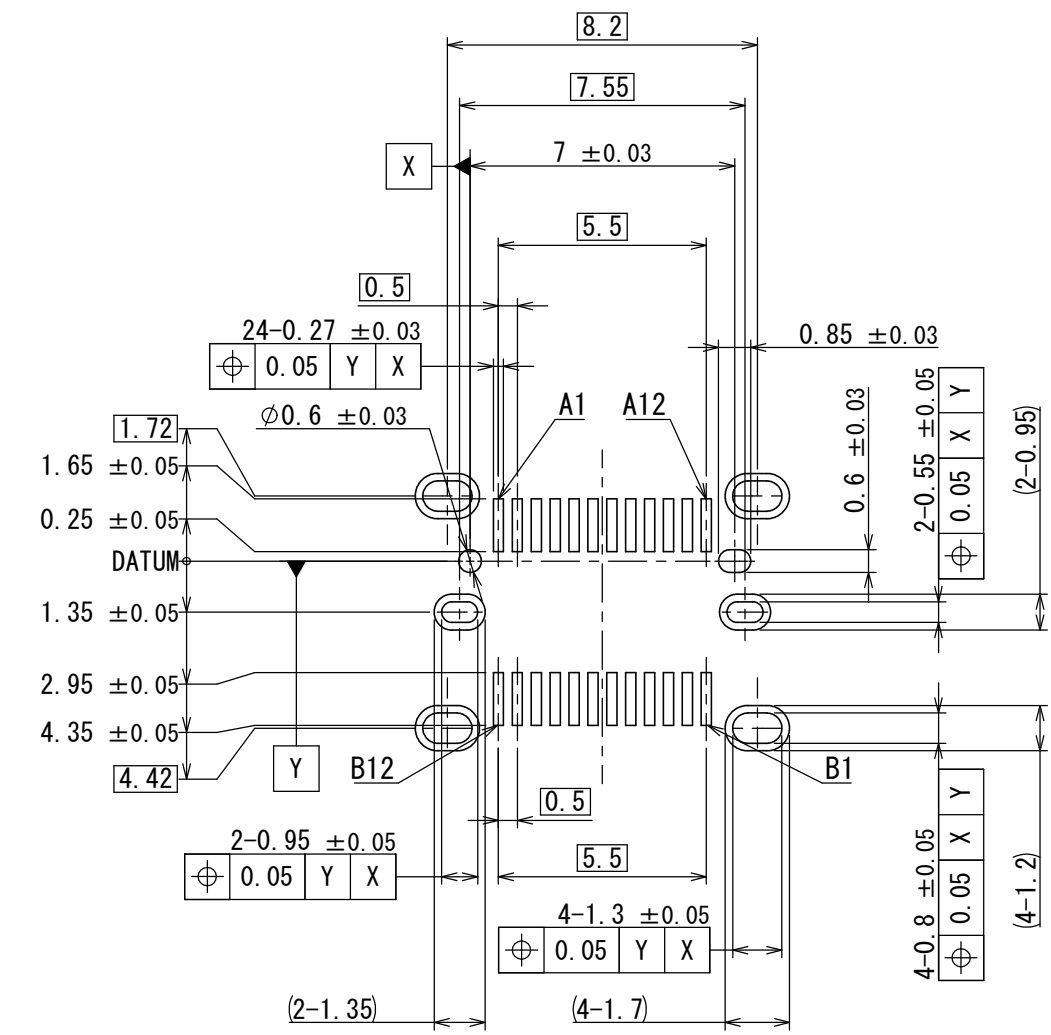
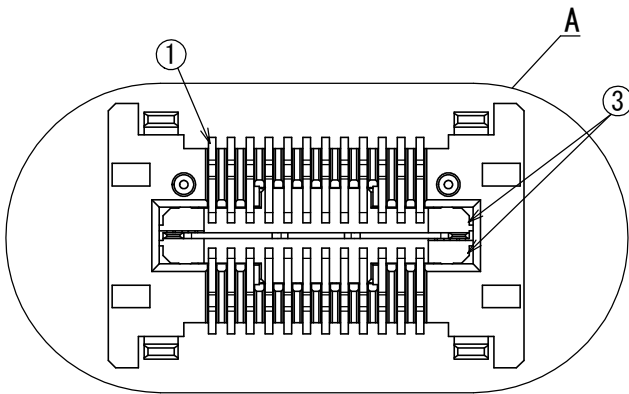


NOTE 5

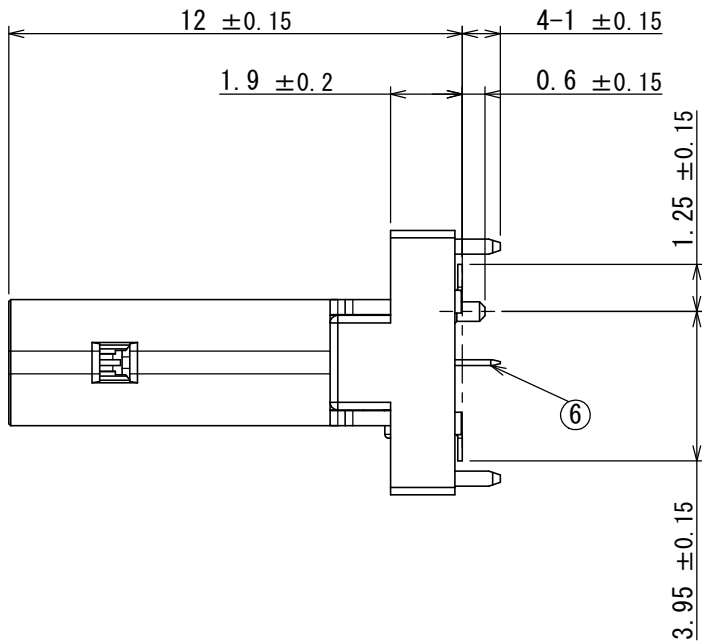

A
(10 : 1)

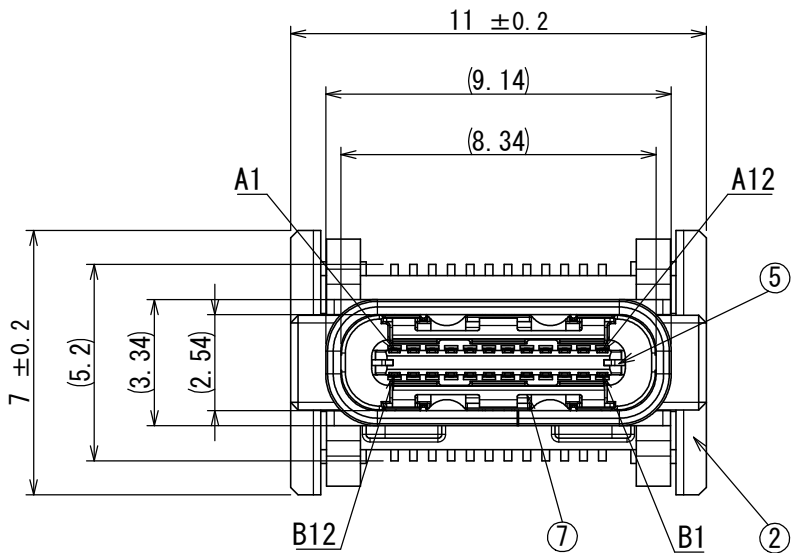

APPLICABLE P.C.B DIMENSION (REF.)
適合基板寸法 (参考)

- NOTE 1. COPLANARITY OF SMT TERMINAL SHALL BE 0.1 MAXIMUM.
NOTE 2. MATING DIMENSIONS CONSIST OF
"Universal Serial Bus Type-C Cable and Connector Specification Revision 1.1"
NOTE 3. THE SHELL LENGTH IS LESS THAN THE MINIMUM SPECIFIED BY THE USB TYPE C STANDARD.
AS SUCH IT CANNOT INDEPENDENTLY BE GURANTEED TO MEET ALL TYPE C MECHANICAL REQUIREMENTS.
REFERENCE THE USB TYPE C SPECIFICATION RELEASE 1.1, SECTION 3.2.1, NOTE 7.
NOTE 4. VACUUM AREA.
NOTE 5. LOT NO. IS MARKED AS SHOWN IN BELOW FIGURE MARKING.
(EX.) 5 Y 0 3
-5 : MANUFACTURE YEAR. (LAST 1 DIGIT OF A.D.)
-Y : MANUFACTURE MONTH. (JAN. TO SEP. : 1 TO 9, OCT. : 0, NOV. : X, DEC. : Y)
-03 : MANUFACTURE DAY. (1 TO 31)

TABLE1. PIN ASSIGNMENT (FRONT VIEW)

Pin No.	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
	GND	TX1+	TX1-	V _{BUS}	CC1	D+	D-	SBU1	V _{BUS}	RX2-	RX2+	GND
	GND	RX1+	RX1-	V _{BUS}	SBU2	D-	D+	CC2	V _{BUS}	TX2-	TX2+	GND
Pin No.	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

8	CAP	1	THERMOPLASTIC RESIN	COLOR:BLACK	
7	GND PLATE	2	STAINLESS STEEL	NICKEL PLATING	
6	MID PLATE 2	1	STAINLESS STEEL	NICKEL PLATING	
5	MID PLATE 1	1	STAINLESS STEEL	NICKEL PLATING	
4	SHELL	1	STAINLESS STEEL	NICKEL PLATING	
3	INSULATOR 2	2	THERMOPLASTIC RESIN	COLOR:BLACK	
2	INSULATOR 1	1	THERMOPLASTIC RESIN	COLOR:BLACK	
1	CONTACT	24	COPPER ALLOY	CONTACT AREA NICKEL:2 μm MIN. PALLADIUM-NICKEL:0.75 μm MIN. GOLD FLASH:0.05 μm MIN. SOLDER TAILS: NICKEL:2 μm MIN. GOLD FLASH:0.03 μm MIN.	

符号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS
仕様書 (SPECIFICATION) JACS-30368※		第1版 (ORIGINAL DATE) 20/JAN/2016		尺度 (SCALE) 5:1	シリーズ (SERIES) DX07
一般公差 (GENERAL TOLERANCE)		製図 DR.		名称 (TITLE) DX07S024WJ1	
寸法 (DIMENSION).		担当 CHK.	S. YAMAGUCHI		
角度 (ANGLES)		査閲 APPD.	M. SASAKI		
× ± 0.8		承認 APPD.	T. MASUMOTO	質量 (MASS)	
× ± 0.4					
× ± 0.1					
× ±		単位 (UNIT) : mm			
日本航空電子工業株式会社 JAE JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.					図面番号 (DRAWING NO.) SJ117219
版数 (VER.) 1					SIZE A2

CAP ASSEMBLY AND MOUTING CONDITION (REF.)
(5 : 1)

MATED CONDITION (REF.)
(2 : 1)