

[illegible][illegible][illegible]

## PRIMARY CHARACTERISTICS

|                                   |                  |
|-----------------------------------|------------------|
| V <sub>BR</sub>                   | 11.1 V to 52.8 V |
| V <sub>WM</sub>                   | 10 V to 43 V     |
| P <sub>PPM</sub> (10 x 1000 µs)   | 6600 W           |
| P <sub>PPM</sub> (10 x 10 000 µs) | 5200 W           |
| P <sub>D</sub>                    | 8 W              |
| I <sub>FSM</sub>                  | 700 A            |
| T <sub>J</sub> max.               | 175 °C           |
| Polarity                          | Uni-directional  |
| Package                           | DO-218AB         |

[illegible]

- Junction temperature optimized design passivated anisotropic rectifier technology
- $T_J = 175\text{ }^{\circ}\text{C}$  capability suitable for high reliability and automotive requirement
- Available in uni-directional polarity only
- Low leakage current
- Low forward voltage drop
- High surge capability
- Meets ISO7637-2 surge specification (varied by test condition)
- Meets MSL level 1, per J-STD-020, LF maximum peak of  $245\text{ }^{\circ}\text{C}$
- AEC-Q101 qualified
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT

[illegible]

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting, especially for automotive load dump protection application.

## MECHANICAL DATA

**Case:** DO-218AB

Molding compound meets UL 94 V-0 flammability rating  
Base P/NHE3\_X - RoHS-compliant and AEC-Q101 qualified  
("X" denotes revision code e.g. A, B, ...)

[illegible]

## HE3 suffix meets JESD 201 class 2 whisker test

**Polarity:** heatsink is anode

**MAXIMUM RATINGS** (T<sub>C</sub> = 25 °C unless otherwise noted)

| PARAMETER                                                                 | SYMBOL                            | VALUE          | UNIT |
|---------------------------------------------------------------------------|-----------------------------------|----------------|------|
| Peak pulse power dissipation                                              | P <sub>PPM</sub>                  | 6600           | W    |
| with 10/1000 μs waveform<br>with 10/10 000 μs waveform                    |                                   | 5200           |      |
| Power dissipation on infinite heatsink at T <sub>C</sub> = 25 °C (fig. 1) | P <sub>D</sub>                    | 8.0            | W    |
| Peak pulse current with 10/1000 μs waveform                               | I <sub>PPM</sub> <sup>(1)</sup>   | See next table | A    |
| Peak forward surge current 8.3 ms single half sine-wave                   | I <sub>FSM</sub>                  | 700            | A    |
| Operating junction and storage temperature range                          | T <sub>J</sub> , T <sub>STG</sub> | -55 to +175    | °C   |

### Note

[illegible]

**ELECTRICAL CHARACTERISTICS** ( $T_C = 25\text{ }^{\circ}\text{C}$  unless otherwise noted)

| DEVICE TYPE | BREAKDOWN VOLTAGE $V_{BR}$ (V) |      | TEST CURRENT $I_T$ (mA) | STAND-OFF VOLTAGE $V_{WM}$ (V) | MAXIMUM REVERSE LEAKAGE AT $V_{WM}$ $I_D$ ( $\mu\text{A}$ ) | MAXIMUM REVERSE LEAKAGE AT $V_{WM}$ $T_J = 175\text{ }^{\circ}\text{C}$ $I_D$ ( $\mu\text{A}$ ) | MAX. PEAK PULSE CURRENT AT 10/1000 $\mu\text{s}$ WAVEFORM (A) | MAXIMUM CLAMPING VOLTAGE AT $I_{PPM}$ $V_C$ (V) |
|-------------|--------------------------------|------|-------------------------|--------------------------------|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------|-------------------------------------------------|
|             | MIN.                           | MAX. |                         |                                |                                                             |                                                                                                 |                                                               |                                                 |
| SM8S10A     | 11.1                           | 12.3 | 5.0                     | 10.0                           | 15                                                          | 250                                                                                             | 388                                                           | 17.0                                            |
| SM8S11A     | 12.2                           | 13.5 | 5.0                     | 11.0                           | 10                                                          | 150                                                                                             | 363                                                           | 18.2                                            |
| SM8S12A     | 13.3                           | 14.7 | 5.0                     | 12.0                           | 10                                                          | 150                                                                                             | 332                                                           | 19.9                                            |
| SM8S13A     | 14.4                           | 15.9 | 5.0                     | 13.0                           | 10                                                          | 150                                                                                             | 307                                                           | 21.5                                            |
| SM8S14A     | 15.6                           | 17.2 | 5.0                     | 14.0                           | 10                                                          | 150                                                                                             | 284                                                           | 23.2                                            |
| SM8S15A     | 16.7                           | 18.5 | 5.0                     | 15.0                           | 10                                                          | 150                                                                                             | 270                                                           | 24.4                                            |
| SM8S16A     | 17.8                           | 19.7 | 5.0                     | 16.0                           | 10                                                          | 150                                                                                             | 254                                                           | 26.0                                            |
| SM8S17A     | 18.9                           | 20.9 | 5.0                     | 17.0                           | 10                                                          | 150                                                                                             | 239                                                           | 27.6                                            |
| SM8S18A     | 20.0                           | 22.1 | 5.0                     | 18.0                           | 10                                                          | 150                                                                                             | 226                                                           | 29.2                                            |
| SM8S20A     | 22.2                           | 24.5 | 5.0                     | 20.0                           | 10                                                          | 150                                                                                             | 204                                                           | 32.4                                            |
| SM8S22A     | 24.4                           | 26.9 | 5.0                     | 22.0                           | 10                                                          | 150                                                                                             | 186                                                           | 35.5                                            |
| SM8S24A     | 26.7                           | 29.5 | 5.0                     | 24.0                           | 10                                                          | 150                                                                                             | 170                                                           | 38.9                                            |
| SM8S26A     | 28.9                           | 31.9 | 5.0                     | 26.0                           | 10                                                          | 150                                                                                             | 157                                                           | 42.1                                            |
| SM8S28A     | 31.1                           | 34.4 | 5.0                     | 28.0                           | 10                                                          | 150                                                                                             | 145                                                           | 45.4                                            |
| SM8S30A     | 33.3                           | 36.8 | 5.0                     | 30.0                           | 10                                                          | 150                                                                                             | 136                                                           | 48.4                                            |
| SM8S33A     | 36.7                           | 40.6 | 5.0                     | 33.0                           | 10                                                          | 150                                                                                             | 124                                                           | 53.3                                            |
| SM8S36A     | 40.0                           | 44.2 | 5.0                     | 36.0                           | 10                                                          | 150                                                                                             | 114                                                           | 58.1                                            |
| SM8S40A     | 44.4                           | 49.1 | 5.0                     | 40.0                           | 10                                                          | 150                                                                                             | 102                                                           | 64.5                                            |
| SM8S43A     | 47.8                           | 52.8 | 5.0                     | 43.0                           | 10                                                          | 150                                                                                             | 95.1                                                          | 69.4                                            |

**Note**

- For all types maximum  $V_F = 1.8\text{ V}$  at  $I_F = 100\text{ A}$  measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

**THERMAL CHARACTERISTICS** ( $T_C = 25\text{ }^{\circ}\text{C}$  unless otherwise noted)

| PARAMETER                                    | SYMBOL          | VALUE | UNIT                 |
|----------------------------------------------|-----------------|-------|----------------------|
| Typical thermal resistance, junction to case | $R_{\theta JC}$ | 0.90  | $^{\circ}\text{C/W}$ |


**ORDERING INFORMATION** (Example)

| PREFERRED P/N                 | UNIT WEIGHT (g) | PREFERRED PACKAGE CODE | BASE QUANTITY | DELIVERY MODE                                                       |
|-------------------------------|-----------------|------------------------|---------------|---------------------------------------------------------------------|
| SM8S10AHE3_A/I <sup>(1)</sup> | 2.605           | I                      | 750           | 13" diameter plastic tape and reel, anode towards the sprocket hole |

**Note**

- <sup>(1)</sup> AEC-Q101 qualified

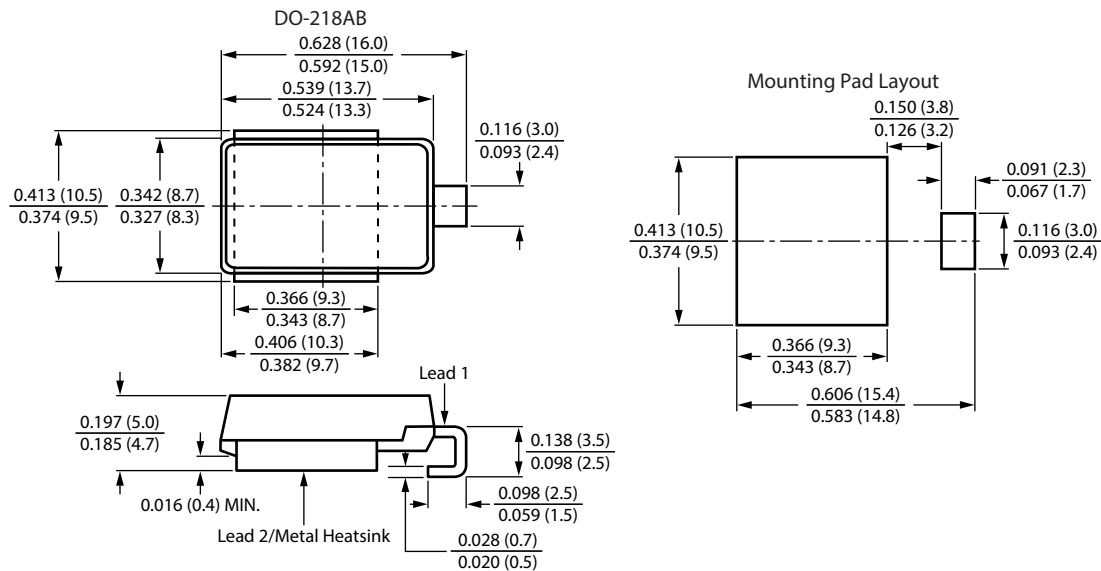

[illegible]

[illegible][illegible][illegible][illegible][illegible][illegible][illegible]