

Distributed by:



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

FEATURES AND SPECIFICATIONS

Features and Benefits

- Sizes 1 to 25 circuits
- 6471 is end-to-end stackable (2 housings only)
- 2695 version with or without locking ramp and polarizing ribs

Reference Information

Product Specification: PS-10-07

Packaging: Bag

UL File No.: E29179

CSA File No.: LR19980

Mates With: Molex KK 2.54mm (.100") pitch headers and 0.04mm (.025") pins

Use With: 2695—2759, 6459 or 41572 terminals

6471—4809 terminals

Designed In: Inches

Electrical*

Voltage: 250V

Current: Phosphor Bronze—4.0A max.

Brass—2.5A max.

Contact Resistance: 20mΩ max.

Dielectric Withstanding Voltage: 1500V AC

Insulation Resistance: 50K MΩ min.

Mechanical*

Contact Insertion Force: 681g (1.5 lb) max.

Contact Retention to Housing: 3.63kg (8 lb) min.

Mating Force: 199g max.

Unmating Force: 57g min.

Normal Force: 200g min.

Physical

Housing: 2695—Red nylon, UL 94V-0


6471—White nylon, UL 94V-0

Operating Temperature: 0 to +75°C






2.54mm (.100") Pitch KK® Crimp Terminal Housing

2695/6471

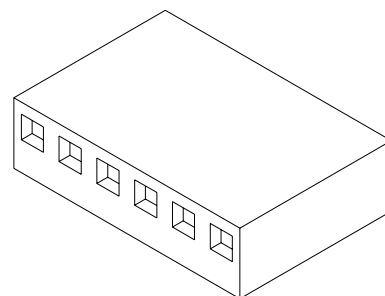

CATALOG DRAWING (FOR REFERENCE ONLY)

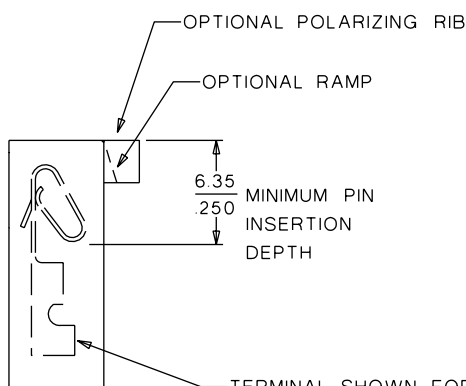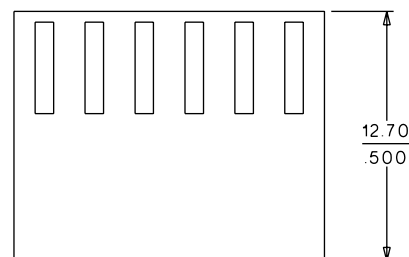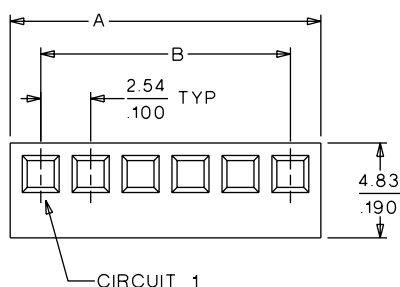

Note: When mating polarizing rib version with breakaway friction lock header or polarizing wall series, the end friction lock or polarizing wall of header must be removed.

	Order No.
Polarizing Key	15-04-9209
Polarizing Peg	15-04-9210

Note: 2695 shown

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.				Dimension	
	2695		6471		A	B
	With Locking Ramp	With Locking Ramp and Polarizing Ribs	Without Locking Ramp or Ribs	With Locking Ramp and Polarizing Ribs†		
1				• 22-01-2011	3.10 (.122)	
2	• 22-01-2027	• 22-01-3027	• 22-01-2021	22-01-2025	5.60 (.220)	2.54 (.100)
3	• 22-01-2037	• 22-01-3037	• 22-01-2031	22-01-2035	8.10 (.320)	5.08 (.200)
4	• 22-01-2047	• 22-01-3047	• 22-01-2041	22-01-2045	10.70 (.420)	7.62 (.300)
5	• 22-01-2057	• 22-01-3057	• 22-01-2051	22-01-2055	13.20 (.520)	10.16 (.400)
6	• 22-01-2067	• 22-01-3067	• 22-01-2061	22-01-2065	15.80 (.620)	12.70 (.500)
7	• 22-01-2077	• 22-01-3077	• 22-01-2071	22-01-2075	18.30 (.720)	15.24 (.600)
8	• 22-01-2087	• 22-01-3087	• 22-01-2081	22-01-2085	20.90 (.820)	17.78 (.700)
9	• 22-01-2097	• 22-01-3097	• 22-01-2091	22-01-2095	23.40 (.920)	20.32 (.800)
10	• 22-01-2107	• 22-01-3107	• 22-01-2101	22-01-2105	25.90 (1.020)	22.86 (.900)
11	• 22-01-2117	• 22-01-3117	• 22-01-2111	22-01-2115	28.50 (1.120)	25.40 (1.000)
12	• 22-01-2127	• 22-01-3127	• 22-01-2121	22-01-2125	31.00 (1.220)	27.94 (1.100)

• US Standard Product, available through Molex franchised distributors

* When mated with Molex product only

† For circuits 19-28, contact Molex

Circuits	Order No.				Dimension	
	2695		6471		A	B
	With Locking Ramp	With Locking Ramp and Polarizing Ribs	Without Locking Ramp or Ribs	With Locking Ramp and Polarizing Ribs†		
13	• 22-01-2137	• 22-01-3137	• 22-01-2131	22-01-2135	33.50 (1.320)	30.48 (1.200)
14	• 22-01-2147	• 22-01-3147	• 22-01-2141	22-01-2145	36.10 (1.420)	33.02 (1.300)
15	• 22-01-2157	• 22-01-3157	• 22-01-2151	22-01-2155	38.60 (1.520)	35.56 (1.400)
16	• 22-01-2167	• 22-01-3167	• 22-01-2161	22-01-2165	41.20 (1.620)	38.10 (1.500)
17	• 22-01-2177	• 22-01-3177	• 22-01-2171	22-01-2175	43.70 (1.720)	40.64 (1.600)
18	• 22-01-2187	• 22-01-3187	• 22-01-2181	22-01-2185	46.20 (1.820)	43.18 (1.700)
19	• 22-01-2197	• 22-01-3197	• 22-01-2191		48.80 (1.920)	45.72 (1.800)
20	• 22-01-2207	• 22-01-3207	• 22-01-2201		51.30 (2.020)	48.26 (1.900)
21	• 22-01-2217	• 22-01-3217	• 22-01-2211		53.90 (2.120)	50.80 (2.000)
22	• 22-01-2227	• 22-01-3227	• 22-01-2221		56.40 (2.220)	53.34 (2.100)
23	• 22-01-2237	• 22-01-3237	• 22-01-2231		58.90 (2.320)	55.88 (2.200)
24	• 22-01-2247	• 22-01-3247	• 22-01-2241		61.50 (2.420)	58.42 (2.300)
25	• 22-01-2257	• 22-01-3257	• 22-01-2251		64.00 (2.520)	60.96 (2.400)



PRODUCT SPECIFICATION

1.0 SCOPE

This Product Specification covers the following

A. 2.50 mm centerline (pitch) 0.64 mm square pin headers

B. 2.54 mm centerline (pitch) 0.64 mm square pin headers

when mated with either printed circuit board (PCB) connectors or connectors terminated with 22 to 28 AWG wire using crimp technology.

2.0 PRODUCT DESCRIPTION

2.1 PRODUCT NAME AND SERIES NUMBERS

Crimp Terminals: 4809, 2759, 41572, 6459, 40445, 8088

Crimp Housings: 2695, 5051, 6471

PCB Connectors: 7534, 4455

Headers: 3022, 3202, 3094, 3494, 6410, 7930, 7395, 90578

Wire to board connector : 7690

Other products conforming to this specification are noted on the individual drawings.

2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

Terminal Material: Brass or Phos. Bronze (for Max performance use phos bronze material.)

Housing: Nylon or Polyester

Pins: Brass or Phos. Bronze

For more information on dimensions, materials, and plating see the individual drawings.

2.3 SAFETY AGENCY APPROVALS

UL File Number E29179

CSALR19980

3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

None

4.0 RATINGS

4.1 VOLTAGE

250 Volts

4.2 CURRENT AND APPLICABLE WIRES (Current is dependent on connector size, contact material, plating, ambient temperature, printed circuit board characteristics and related factors. Actual current rating is application dependent and should be evaluated for each application.)

AWG	Amps (Max)	Outside Insulation Diameter
22	4.00	See Drawings
24	3.75	See Drawings
26	3.50	See Drawings
28	3.00	See Drawings

4.3 TEMPERATURE (ambient + 30° temp rise)

Operating: 0°C to +75°C

Non-operating: - 40°C to +105°C

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
A	EC No: E2003 -0971 DATE: 2003 / 03 / 18	PRODUCT SPECIFICATION 2.50mm & 2.54mm CENTER KK CONNECTORS	1 of 5
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-99020-0088	B MAGUIRE	L Kiernan	M Wilhite



PRODUCT SPECIFICATION

5.0 PERFORMANCE

5.1 ELECTRICAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
Contact Resistance (Low Level)	Mate connectors: apply a maximum voltage of 20 mV and a current of 100 mA.	10 milliohms MAXIMUM [initial]
Contact Resistance of Wire Termination (Low Level)	Terminate the applicable wire to the terminal and measure wire using a voltage of 20 mV and a current of 100 mA.	2 milliohms MAXIMUM [initial]
Insulation Resistance	Unmate & unmount connectors: apply a voltage of 500 VDC between adjacent terminals and between terminals to ground.	1000 Megaohms MINIMUM
Dielectric Withstanding Voltage	Unmate connectors: apply a voltage of {two times the rated voltage plus 1000 volts} VAC for 1 minute between adjacent terminals and between terminals to ground.	No breakdown
Capacitance	Measure between adjacent terminals at 1 MHz.	2 picofarads MAXIMUM
Temperature Rise (via Current Cycling)	Mate connectors: measure the temperature rise at the rated current after: 1) 96 hours (steady state) 2) 240 hours (45 minutes ON and 15 minutes OFF per hour) 3) 96 hours (steady state)	Temperature rise: +30°C MAXIMUM

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
A	EC No: E2003 -0971 DATE: 2003 / 03 / 18	PRODUCT SPECIFICATION 2.50mm & 2.54mm CENTER KK CONNECTORS	2 of 5
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-99020-0088	B MAGUIRE	L Kiernan	M Wilhite



PRODUCT SPECIFICATION

5.2 MECHANICAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
Connector Mate and Unmate Forces	Per circuit when mated to a 0.635mm Sq. pin. Mate and unmate connector (male to female) at a rate of 25 ± 6 mm per minute.	1.95 N MAXIMUM insertion force & 0.56 N MINIMUM withdrawal force
Terminal Retention Force (in Housing)	Axial pullout force on the terminal in the housing at a rate of 25 ± 6 mm per minute. (Forces will change with platings and materials.)	17.8 N MINIMUM withdrawal force
Terminal Insertion Force (into Housing)	Apply an axial insertion force on the terminal at a rate of 25 ± 6 mm. (Forces will change with platings and materials.)	6.67 N MAXIMUM insertion force
Durability	Mate connectors up to 25 cycles at a maximum rate of 10 cycles per minute prior to Environmental Tests.	10 milliohms MAXIMUM (change from initial)
Vibration (Random)	Mate connectors and vibrate per EIA 364-28, test condition VII.	10 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond
Shock (Mechanical)	Mate connectors and shock at 50 g's with $\frac{1}{2}$ sine wave (11 milliseconds) shocks in the $\pm X, \pm Y, \pm Z$ axes (18 shocks total).	10 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond
Wire Pullout Force (Axial)	Apply an axial pullout force on the wire at a rate of 25 ± 6 mm. (For maximum performance use Molex application tooling with stranded tinned copper wire)	22 awg = 44 N 24 awg = 35 N 26 awg = 26 N 28 awg = 17 N 30 awg = 13 N
Normal Force	Apply a perpendicular force.	2.94 N (300 grams) average

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
A	EC No: E2003 -0971 DATE: 2003 / 03 / 18	PRODUCT SPECIFICATION 2.50mm & 2.54mm CENTER KK CONNECTORS	3 of 5
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-99020-0088	B MAGUIRE	L Kiernan	M Wilhite



PRODUCT SPECIFICATION

5.3 ENVIRONMENTAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT										
Shock (Thermal)	Mate connectors; expose to 5 cycles of: <table><tr><td>Temperature °C</td><td>Duration (Minutes)</td></tr><tr><td>-40 +0/-3</td><td>30</td></tr><tr><td>+25 ±10</td><td>5 MAXIMUM</td></tr><tr><td>+105 +3/-0</td><td>30</td></tr><tr><td>+25 ±10</td><td>5 MAXIMUM</td></tr></table>	Temperature °C	Duration (Minutes)	-40 +0/-3	30	+25 ±10	5 MAXIMUM	+105 +3/-0	30	+25 ±10	5 MAXIMUM	10 milliohms MAXIMUM (change from initial) & Visual: No Damage
Temperature °C	Duration (Minutes)											
-40 +0/-3	30											
+25 ±10	5 MAXIMUM											
+105 +3/-0	30											
+25 ±10	5 MAXIMUM											
Thermal Aging	Mate connectors; expose to: 96 hours at 105 ± 2°C	10 milliohms MAXIMUM (change from initial]) & Visual: No Damage										
Humidity (Steady State)	Mate connectors: expose to a temperature of 40 ± 2°C with a relative humidity of 90-95% for 96 hours. Note: Remove surface moisture and air dry for 1 hour prior to measurements.	10 milliohms MAXIMUM (change from initial) & Dielectric Withstanding Voltage: No Breakdown at 500 VAC & Insulation Resistance: 1000 Megaohms MINIMUM & Visual: No Damage										
Humidity (Cyclic)	Mate connectors: cycle per EIA-364-31: 24 cycles at temperature 25 ± 3°C at 80 ± 5% relative humidity and 65 ± 3°C at 50 ± 5% relative humidity; dwell time of 1.0 hour; ramp time of 0.5 hours. {Note: Remove surface moisture and air dry for 1 hour prior to measurements.}	10 milliohms MAXIMUM (change from initial) & Dielectric Withstanding Voltage: No Breakdown at 500 VAC & Insulation Resistance: 1000 Megaohms MINIMUM & Visual: No Damage										
Solderability	Per SMES-152	Solder coverage: 95% MINIMUM (per SMES-152)										

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
A	EC No: E2003 -0971 DATE: 2003 / 03 / 18	PRODUCT SPECIFICATION 2.50mm & 2.54mm CENTER KK CONNECTORS	4 of 5
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-99020-0088	B MAGUIRE	L Kiernan	M Wilhite



PRODUCT SPECIFICATION

5.3 ENVIRONMENTAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
Solder Resistance	Dip connector terminal tails in solder: Solder Duration: 5 ± 0.5 seconds; Solder Temperature: $230 \pm 5^{\circ}\text{C}$	Visual: No Damage to insulator material
Salt Spray	Mate connectors: Duration: 48 hours exposure; Atmosphere: salt spray from a 5% solution; Temperature: $35 +1/-2^{\circ}\text{C}$	10 milliohms MAXIMUM (change from initial) & Visual: No Damage
Cold Resistance	Mate connectors: Duration: 96 hours; Temperature: $-40 \pm 3^{\circ}\text{C}$	10 milliohms MAXIMUM (change from initial) & Visual: No Damage

6.0 PACKAGING



Parts shall be packaged to protect against damage during handling, transit and storage.

7.0 GAGES AND FIXTURES

8.0 OTHER

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
A	EC No: E2003 -0971 DATE: 2003 / 03 / 18	PRODUCT SPECIFICATION 2.50mm & 2.54mm CENTER KK CONNECTORS	5 of 5
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-99020-0088	B MAGUIRE	L Kiernan	M Wilhite

NO. OF CKT.'S	DIM. A	DIM. B	DIM. C
1	N/A	(3.10) .122	(7.16) .282
2	(2.54±.05) .100±.002	(5.64) .222	(9.70) .382
3	(5.08±.05) .200±.002	(8.18) .322	(12.24) .482
4	(7.62±.05) .300±.002	(10.72) .422	(14.78) .582
5	(10.16±.05) .400±.002	(13.26) .522	(17.32) .682
6	(12.70±.08) .500±.003	(15.80) .622	(19.86) .782
7	(15.24±.08) .600±.003	(18.34) .722	(22.40) .882
8	(17.78±.08) .700±.003	(20.88) .822	(24.94) .982
9	(20.32±.10) .800±.004	(23.42) .922	(27.48) 1.082
10	(22.86±.10) .900±.004	(25.96) 1.022	(30.02) 1.182
11	(25.4±.10) 1.000±.004	(28.50) 1.122	(32.56) 1.282
12	(27.94±.13) 1.100±.005	(31.04) 1.222	(35.10) 1.382
13	(30.48±.13) 1.200±.005	(33.58) 1.322	(37.64) 1.482
14	(33.02±.13) 1.300±.005	(36.12) 1.422	(40.18) 1.582
15	(35.56±.13) 1.400±.005	(38.66) 1.522	(42.72) 1.682
16	(38.10±.15) 1.500±.006	(41.20) 1.622	(45.26) 1.782
17	(40.64±.15) 1.600±.006	(43.74) 1.722	(47.80) 1.882
18	(43.18±.15) 1.700±.006	(46.28) 1.822	(50.34) 1.982
19	(45.72±.15) 1.800±.006	(48.82) 1.922	(52.88) 2.082
20	(48.26±.15) 1.900±.006	(51.36) 2.022	(55.42) 2.182
21	(50.80±.18) 2.000±.007	(53.90) 2.122	(57.96) 2.282
22	(53.34±.18) 2.100±.007	(56.44) 2.222	(60.50) 2.382
23	(55.88±.18) 2.200±.007	(58.98) 2.322	(63.04) 2.482
24	(58.42±.18) 2.300±.007	(61.52) 2.422	(65.58) 2.582
25	(60.96±.20) 2.400±.008	(64.06) 2.522	(68.12) 2.682
26	(63.50±.20) 2.500±.008	(66.60) 2.622	(70.66) 2.782
27	(66.04±.20) 2.600±.008	(69.14) 2.722	(73.20) 2.882
28	(68.58±.20) 2.700±.008	(71.68) 2.822	(75.74) 2.982
29	(71.12±.23) 2.800±.009	(74.22) 2.922	(78.28) 3.082
30	(73.66±.23) 2.900±.009	(76.76) 3.022	(80.82) 3.182
31	(76.20±.23) 3.000±.009	(79.30) 3.122	(83.36) 3.282
32	(78.74±.23) 3.100±.009	(81.84) 3.222	(85.90) 3.382
33	(81.28±.25) 3.200±.010	(84.38) 3.322	(88.44) 3.482
34	(83.82±.25) 3.300±.010	(86.92) 3.422	(90.98) 3.582
35	(86.36±.25) 3.400±.010	(89.46) 3.522	(93.52) 3.682
36	(88.90±.25) 3.500±.010	(92.00) 3.622	(96.06) 3.782
37	(91.44±.28) 3.600±.011	(94.54) 3.722	(98.60) 3.882
38	(93.98±.28) 3.700±.011	(97.08) 3.822	(101.14) 3.982
39	(96.52±.28) 3.800±.011	(99.62) 3.922	(103.68) 4.082
40	(99.06±.28) 3.900±.011	(102.16) 4.022	(106.22) 4.182

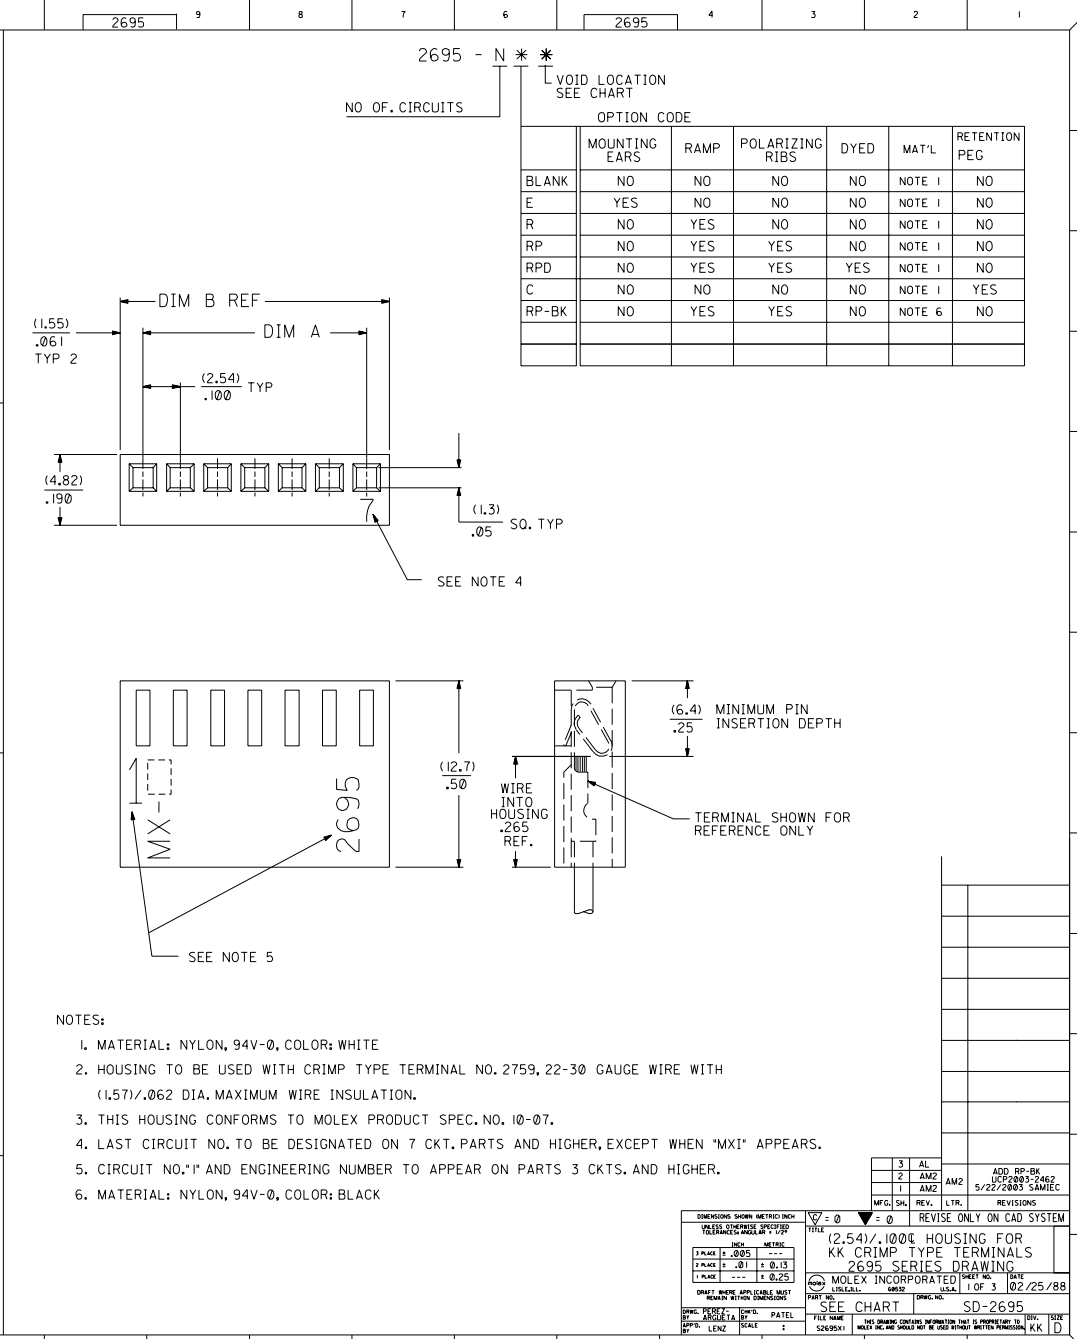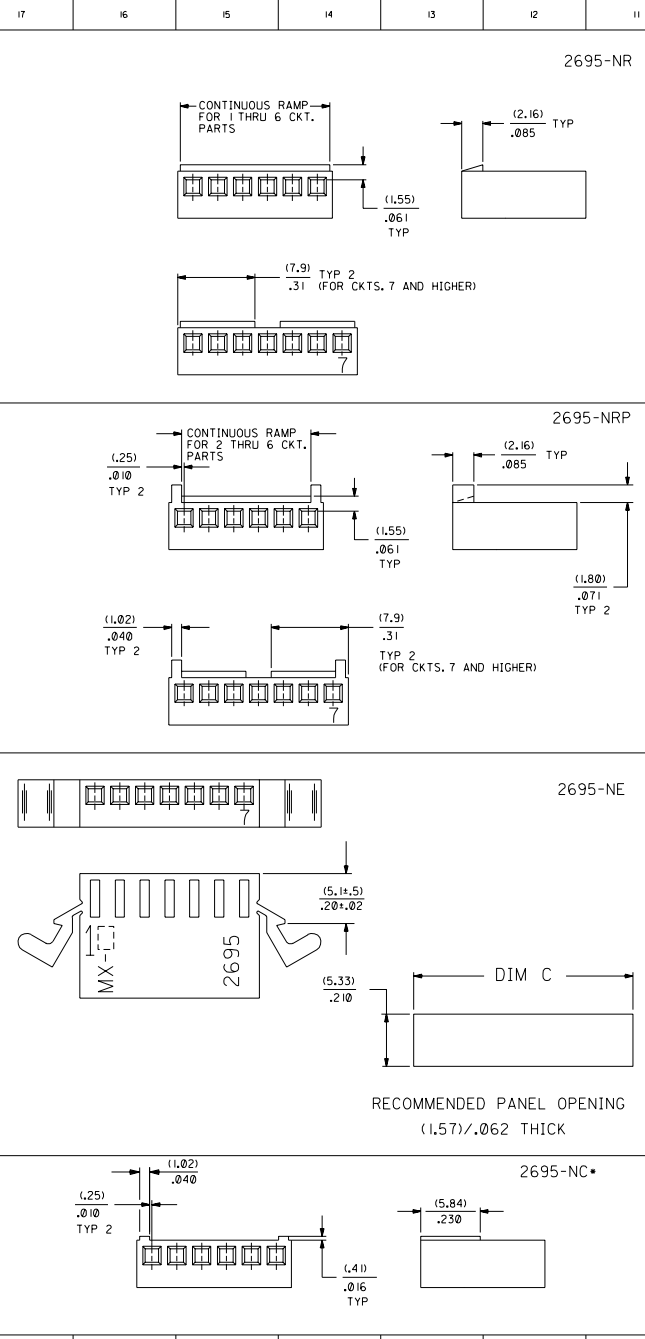

	20	19	18	17	16	15	14	13	12	11	2695	9	8	7	6	2695	4	3	2	1	
	2695-N			2695-NE			2695-NR			2695-NRP			2695-NRPD			2695-NRP-BK					
M	PART NO.	ENG NO.	VOID	PART NO.	ENG NO.	VOID	PART NO.	ENG NO.	VOID	PART NO.	ENG NO.	VOID	PART NO.	ENG NO.	VOID	PART NO.	ENG NO.	VOID		M	
	22-01-2011	2695-1			2695-1E			2695-1R		N/A	2695-1RP		N/A	2695-1RPD			50-29-1557	2695-2RP-BK			
	22-01-2021	2695-2		22-01-2022	2695-2E			2695-2R		22-01-3027	2695-2RP			2695-2RPD			50-29-1558	2695-3RP-BK			
	22-01-2031	2695-3			2695-3E			2695-3R		22-01-3037	2695-3RP			2695-3RPD			50-29-1559	2695-4RP-BK			
	22-01-2041	2695-4			2695-4E			2695-4R		22-01-3047	2695-4RP			2695-4RPD			50-29-1560	2695-5RP-BK			
L	22-01-2051	2695-5			2695-5E			2695-5R		22-01-3057	2695-5RP		22-32-2051	2695-5RPD			50-29-1561	2695-6RP-BK			
	22-01-2061	2695-6			2695-6E			2695-6R		22-01-3067	2695-6RP			2695-6RPD			50-29-1562	2695-7RP-BK			
	22-01-2071	2695-7		22-01-2072	2695-7E			2695-7R		22-01-3077	2695-7RP			2695-7RPD			50-29-1563	2695-8RP-BK			
	22-01-2081	2695-8			2695-8E			2695-8R		22-01-3087	2695-8RP			2695-8RPD			50-29-1564	2695-9RP-BK			
	22-01-2091	2695-9			2695-9E			2695-9R		22-01-3097	2695-9RP		22-32-2101	2695-9RPD			50-29-1565	2695-10RP-BK			
	22-01-2101	2695-10			2695-10E			2695-10R		22-01-3107	2695-10RP			2695-10RPD			50-29-1566	2695-11RP-BK			
	22-01-2111	2695-11			2695-11E			2695-11R		22-01-3117	2695-11RP			2695-11RPD			50-29-1567	2695-12RP-BK			
K	22-01-2121	2695-12			2695-12E			2695-12R		22-01-3127	2695-12RP			2695-12RPD			50-29-1568	2695-13RP-BK			
	22-01-2131	2695-13			2695-13E			2695-13R		22-01-3137	2695-13RP			2695-13RPD			50-29-1569	2695-14RP-BK			
	22-01-2141	2695-14			2695-14E			2695-14R		22-01-3147	2695-14RP			2695-14RPD			50-29-1570	2695-15RP-BK			
	22-01-2151	2695-15			2695-15E			2695-15R		22-01-3157	2695-15RP			2695-15RPD			50-29-1571	2695-16RP-BK			
	22-01-2161	2695-16			2695-16E			2695-16R		22-01-3167	2695-16RP			2695-16RPD			50-29-1572	2695-17RP-BK			
	22-01-2171	2695-17			2695-17E			2695-17R		22-01-3177	2695-17RP			2695-17RPD			50-29-1573	2695-18RP-BK			
J	22-01-2181	2695-18			2695-18E			2695-18R		22-01-3187	2695-18RP			2695-18RPD			50-29-1574	2695-19RP-BK			
	22-01-2191	2695-19			2695-19E			2695-19R		22-01-3197	2695-19RP			2695-19RPD			50-29-1575	2695-20RP-BK			
	22-01-2201	2695-20			2695-20E			2695-20R		22-01-3207	2695-20RP			2695-20RPD			50-29-1576	2695-21RP-BK			
	22-01-2211	2695-21			2695-21E			2695-21R		22-01-3217	2695-21RP			2695-21RPD			50-29-1577	2695-22RP-BK			
	22-01-2221	2695-22			2695-22E			2695-22R		22-01-3227	2695-22RP			2695-22RPD			50-29-1578	2695-23RP-BK			
	22-01-2231	2695-23			2695-23E			2695-23R		22-01-3237	2695-23RP			2695-23RPD			50-29-1579	2695-24RP-BK			
I	22-01-2241	2695-24			2695-24E			2695-24R		22-01-3247	2695-24RP			2695-24RPD			50-29-1580	2695-25RP-BK			
	22-01-2251	2695-25			2695-25E			2695-25R		22-01-3257	2695-25RP			2695-25RPD			50-29-1581	2695-26RP-BK			
	22-01-2261	2695-26			2695-26E			2695-26R		22-01-3267	2695-26RP			2695-26RPD			50-29-1582	2695-27RP-BK			
	22-01-2271	2695-27			2695-27E			2695-27R		22-01-3277	2695-27RP			2695-27RPD			50-29-1583	2695-28RP-BK			
	22-01-2281	2695-28			2695-28E			2695-28R		22-01-3287	2695-28RP			2695-28RPD							
	22-01-2291	2695-29			2695-29E			2695-29R			2695-29RP			2695-29RPD							
		2695-30			2695-30E			2695-30R			2695-30RP			2695-30RPD							
H		2695-31			2695-31E			2695-31R			2695-31RP			2695-31RPD							
		2695-32			2695-32E			2695-32R			2695-32RP			2695-32RPD							
	22-01-2331	2695-33			2695-33E		22-01-2337	2695-33R			2695-33RP			2695-33RPD							
		2695-34			2695-34E			2695-34R			2695-34RP			2695-34RPD							
		2695-35			2695-35E			2695-35R			2695-35RP			2695-35RPD							
		2695-36			2695-36E			2695-36R			2695-36RP			2695-36RPD							
G		2695-37			2695-37E			2695-37R			2695-37RP			2695-37RPD							
		2695-38			2695-38E			2695-38R			2695-38RP			2695-38RPD							
		2695-39			2695-39E			2695-39R			2695-39RP			2695-39RPD							
		2695-40			2695-40E			2695-40R			2695-40RP			2695-40RPD							
							22-01-2062	2695-06R-5	5		22-01-5102	2695-10RP-2	2								
											22-01-5044	2695-4RP-3	3								
F											22-01-5103	2695-10RP-5	5								
											22-01-5111	2695-11RP-5	5								
											22-01-5104	2695-10RP-9	9								
E																					
D																					
C																					
B																					

SEE SHEET I AK7

SEE SHEET I

AK2

SEE SHEET I AK5

SEE SHEET I

AK1

SEE SHEET I

AK3

SEE SHEET I

AK4

SEE SHEET I

AK6

SEE SHEET I

AK8

SEE SHEET I

AK9

SEE SHEET I

AK10

SEE SHEET I

AK11

SEE SHEET I

AK12

SEE SHEET I

AK13

SEE SHEET I

AK14

SEE SHEET I

AK15

SEE SHEET I

AK16

SEE SHEET I

AK17

SEE SHEET I

AK18

SEE SHEET I

AK19

SEE SHEET I

AK20

SEE SHEET I

AK21

SEE SHEET I

AK22

SEE SHEET I

AK23

SEE SHEET I

AK24

SEE SHEET I

AK25

SEE SHEET I

AK26

SEE SHEET I

AK27

SEE SHEET I

AK28

SEE SHEET I

AK29

SEE SHEET I

AK30

SEE SHEET I

AK31

SEE SHEET I

AK32

SEE SHEET I

AK33

SEE SHEET I

AK34

SEE SHEET I

AK35

SEE SHEET I

AK36

SEE SHEET I

AK37

SEE SHEET I

AK38

SEE SHEET I

AK39

SEE SHEET I

AK40

SEE SHEET I

AK41

SEE SHEET I

AK42

SEE SHEET I

AK43

SEE SHEET I

AK44

SEE SHEET I

AK45

SEE SHEET I

AK46

SEE SHEET I

AK47

SEE SHEET I

AK48

SEE SHEET I

AK49

SEE SHEET I

AK50

SEE SHEET I

AK51

SEE SHEET I

AK52

SEE SHEET I

AK53

SEE SHEET I

AK54

SEE SHEET I

AK55

SEE SHEET I

AK56

SEE SHEET I

AK57

SEE SHEET I

AK58

SEE SHEET I

AK59

SEE SHEET I

AK60

SEE SHEET I

AK61

SEE SHEET I

AK62

SEE SHEET I

AK63

SEE SHEET I

AK64

SEE SHEET I

AK65

SEE SHEET I

AK66

SEE SHEET I

AK67

SEE SHEET I

AK68

SEE SHEET I

AK69

SEE SHEET I

AK70

SEE SHEET I

AK71

SEE SHEET I

AK72

SEE SHEET I

AK73

SEE SHEET I

AK74

SEE SHEET I

AK75

SEE SHEET I

AK76

SEE SHEET I

AK77

SEE SHEET I

AK78

SEE SHEET I

AK79

SEE SHEET I

AK80

SEE SHEET I

AK81

SEE SHEET I

AK82

SEE SHEET I

AK83

SEE SHEET I

AK84

SEE SHEET I

AK85

SEE SHEET I

AK86

SEE SHEET I

AK87

SEE SHEET I

AK88

SEE SHEET I

AK89

SEE SHEET I

AK90

SEE SHEET I

AK91

SEE SHEET I

AK92

SEE SHEET I

AK93

SEE SHEET I

AK94

SEE SHEET I

AK95

SEE SHEET I

AK96

SEE SHEET I

AK97

SEE SHEET I

AK98

SEE SHEET I

AK99

SEE SHEET I

AK100

SEE SHEET I

AK101

SEE SHEET I

AK102

SEE SHEET I

AK103

SEE SHEET I

AK104

SEE SHEET I

AK105

SEE SHEET I

AK106

SEE SHEET I

AK107

SEE SHEET I

AK108

SEE SHEET I

AK109

SEE SHEET I

AK110

SEE SHEET I

AK111

SEE SHEET I

AK112

SEE SHEET I

AK113

SEE SHEET I

AK114

SEE SHEET I

AK115

SEE SHEET I

AK116

SEE SHEET I

AK117

SEE SHEET I

AK118

SEE SHEET I

AK119

SEE SHEET I

AK120

SEE SHEET I

AK121

SEE SHEET I

AK122

SEE SHEET I

AK123

SEE SHEET I

AK124

SEE SHEET I

AK125

SEE SHEET I

AK126

SEE SHEET I

AK127

SEE SHEET I

AK128

SEE SHEET I

AK129

SEE SHEET I

AK130

SEE SHEET I

AK131

SEE SHEET I

AK132

SEE SHEET I

AK133

SEE SHEET I

AK134

SEE SHEET I

AK135

SEE SHEET I

AK136

SEE SHEET I

AK137

SEE SHEET I

AK138

SEE SHEET I

AK139

SEE SHEET I

AK140

SEE SHEET I

AK141

SEE SHEET I

AK142

SEE SHEET I

AK143

SEE SHEET I

AK144

SEE SHEET I

AK145

SEE SHEET I

AK146

SEE SHEET I

AK147

SEE SHEET I

AK148

SEE SHEET I

AK149

SEE SHEET I

AK150

SEE SHEET I

AK151

SEE SHEET I

AK152

SEE SHEET I

AK153

SEE SHEET I

AK154

SEE SHEET I

AK155

SEE SHEET I

AK156

SEE SHEET I

AK157

SEE SHEET I

AK158

SEE SHEET I

AK159

SEE SHEET I

AK160

SEE SHEET I

AK161

SEE SHEET I

AK162

SEE SHEET I

AK163

SEE SHEET I

AK164

SEE SHEET I

AK165

SEE SHEET I

AK166

SEE SHEET I

AK167

SEE SHEET I

AK168

SEE SHEET I

AK169

SEE SHEET I

AK170

SEE SHEET I

AK171

SEE SHEET I

AK172

SEE SHEET I

AK173

SEE SHEET I

AK174

SEE SHEET I

AK175

SEE SHEET I

AK176

SEE SHEET I

AK177

SEE SHEET I

AK178

SEE SHEET I

AK179

SEE SHEET I

AK180

SEE SHEET I

AK181

SEE SHEET I

AK182

SEE SHEET I

AK183

SEE SHEET I

AK184

SEE SHEET I

AK185

SEE SHEET I

AK186

SEE SHEET I

AK187

SEE SHEET I

AK188

SEE SHEET I

AK189

SEE SHEET I

AK190

SEE SHEET I

AK191

SEE SHEET I

AK192

SEE SHEET I

AK193

SEE SHEET I

AK194

SEE SHEET I

AK195

SEE SHEET I

AK196

SEE SHEET I

AK197

SEE SHEET I

AK198

SEE SHEET I

AK199

SEE SHEET I

AK200

SEE SHEET I

AK201

SEE SHEET I

AK202

SEE SHEET I

AK203

SEE SHEET I

AK204

SEE SHEET I

AK205

SEE SHEET I

AK206

SEE SHEET I

AK207

SEE SHEET I

AK208

SEE SHEET I

AK209

SEE SHEET I

AK210

SEE SHEET I

AK211

SEE SHEET I</

[illegible]