Customer Information Sheet

DRAWING No.: M50-320XX45	SHEET 2 OF 2	IF IN DOUBT - ASK	©	NOT TO SCALE	THIRD ANGLE PROJECTION	ALL DIMENSIONS IN mm

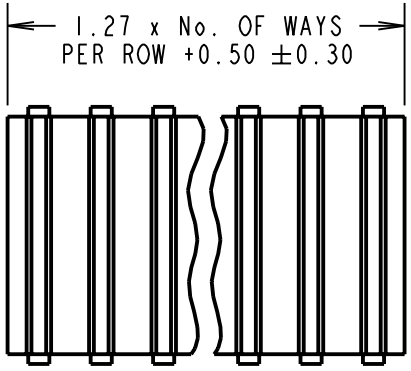

SPECIFICATIONS:
MATERIAL:
MOULDING = NYLON 6T UL94V-0, BLACK
CONTACT = BRASS
FINISH:
CONTACT = GOLD
ELECTRICAL:
CURRENT RATING = 1A
VOLTAGE PROOF = 500V AC/DC
CONTACT RESISTANCE = 20 MILLIOHMS MAX
INSULATION RESISTANCE = 5,000 MEGOHMS MIN
ENVIRONMENTAL:
OPERATING TEMPERATURE = -55°C TO +105°C
PACKING:
TUBE
FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C029XX (LATEST ISSUE)

ORDER CODE:
M50-320XX45
No. OF WAYS PER ROW
03 TO 40
FINISH: GOLD

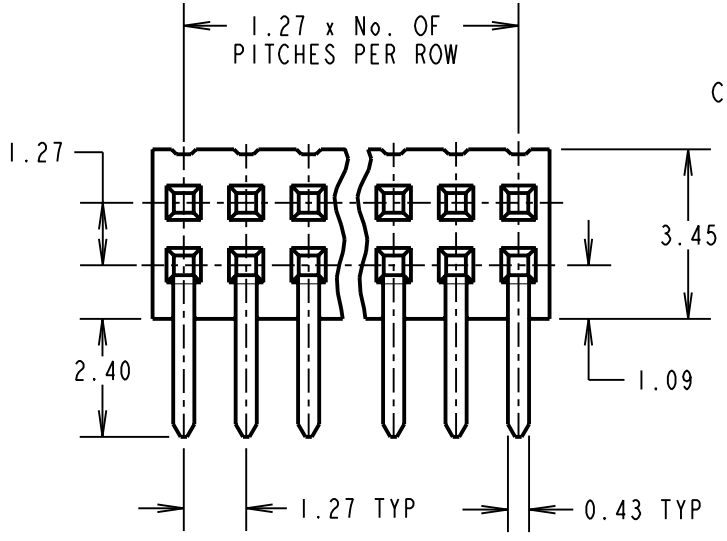

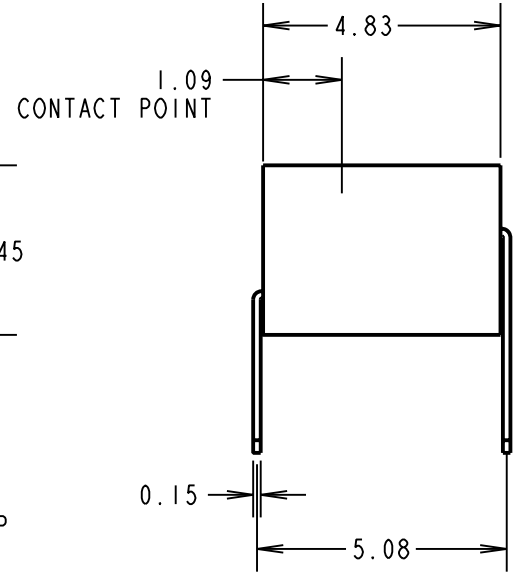

NOTES:
1. RECOMMENDED PCB HOLE SIZE = ∅0.70 ±0.05mm.

RA	8	03.08.09	10420
NAME	ISS.	DATE	C/NOTE
APPROVED: R.ADDE			
CHECKED: R.BROCKBANK			
DRAWN: J. ENRIGHT			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN USA
TEL: 603 893 5376
FAX: 603 893 5396
mis@harwin.com

HARWIN Europe (UK)
TEL: 023 9231 4545
FAX: 023 9231 4590
mis@harwin.co.uk

HARWIN Asia
TEL: +65 6 779 4909
FAX: +65 6 779 3868
mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL: SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE:
1.27mm PITCH DIL
SIDE ENTRY SOCKET ASSY

DRAWING NUMBER:
M50-320XX45

SHT 2 OF 2