

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

MAY ,2011.

© COPYRIGHT 2011 By Tyco Electronics Japan G.K.

ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
J			B	REVISED	16SEP2015

1.材料 ハウジング、スライダ：熱可塑性樹脂 UL 94-V 色：黒

コンタクト：銅合金

シェル：銅合金

コイル：SWP

カムロッド：SUS

フックスプリング：SUS

2 仕上げ コンタクト：Ni下地めっき

接点部：金めっき

シェル：Ni下地めっき

金めっき

③ 非累積公差

4. コプラナリティは 0.1mm以下

⑤ スイッチ回路図

⑥ デートコードマーキングすること。吸着エリアφ4にはマーキングしないこと。

⑦ バージョンマーキングすること。吸着エリアφ4にはマーキングしないこと。

⑧ 生産場所コード：“G”：GUANGDONG，“Q”：QINGDAO.

1.MATERIAL HOUSING,SLIDER : THERMOPLASTIC RESIN

UL94V-0, COLOR;BLACK

CONTACT : COPPER ALLOY

SHELL : COPPER ALLOY

COIL : SWP

CAM ROD : SUS

HOOK SPRING : SUS

2 FINISH CONTACT : Ni UNDER PL

Au PL AT CONTACT AREA

SHELL : Ni UNDER PL

Au PL

③ NON-CUMULATIVE TOLERANCE



4. COPLANARITY IS 0.1MAX.



⑤ CIRCUIT DRAWING OF SWITCH.


⑥ MARK DATE CODE. MUST NOT MARK AT VACUUM AREA φ4.

YEAR XXXX WEEK
DAY SHIFT LINE
MARK VERSION. MUST NOT MARK AT VACUUM AREA φ4.
(MASS PRO) AX (PROTO) P1→P2→PX

⑧ PRODUCTION LOCATION CODE: "G" FOR GUANGDONG, "Q" FOR QINGDAO.

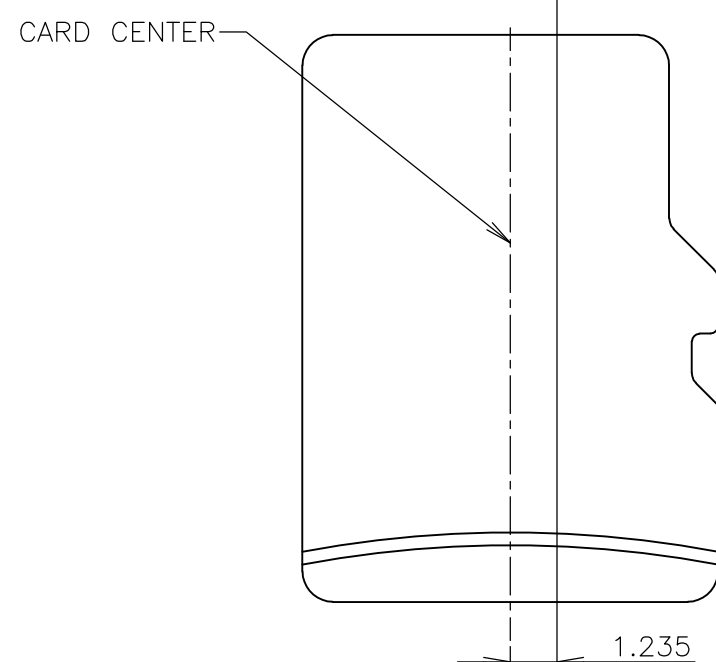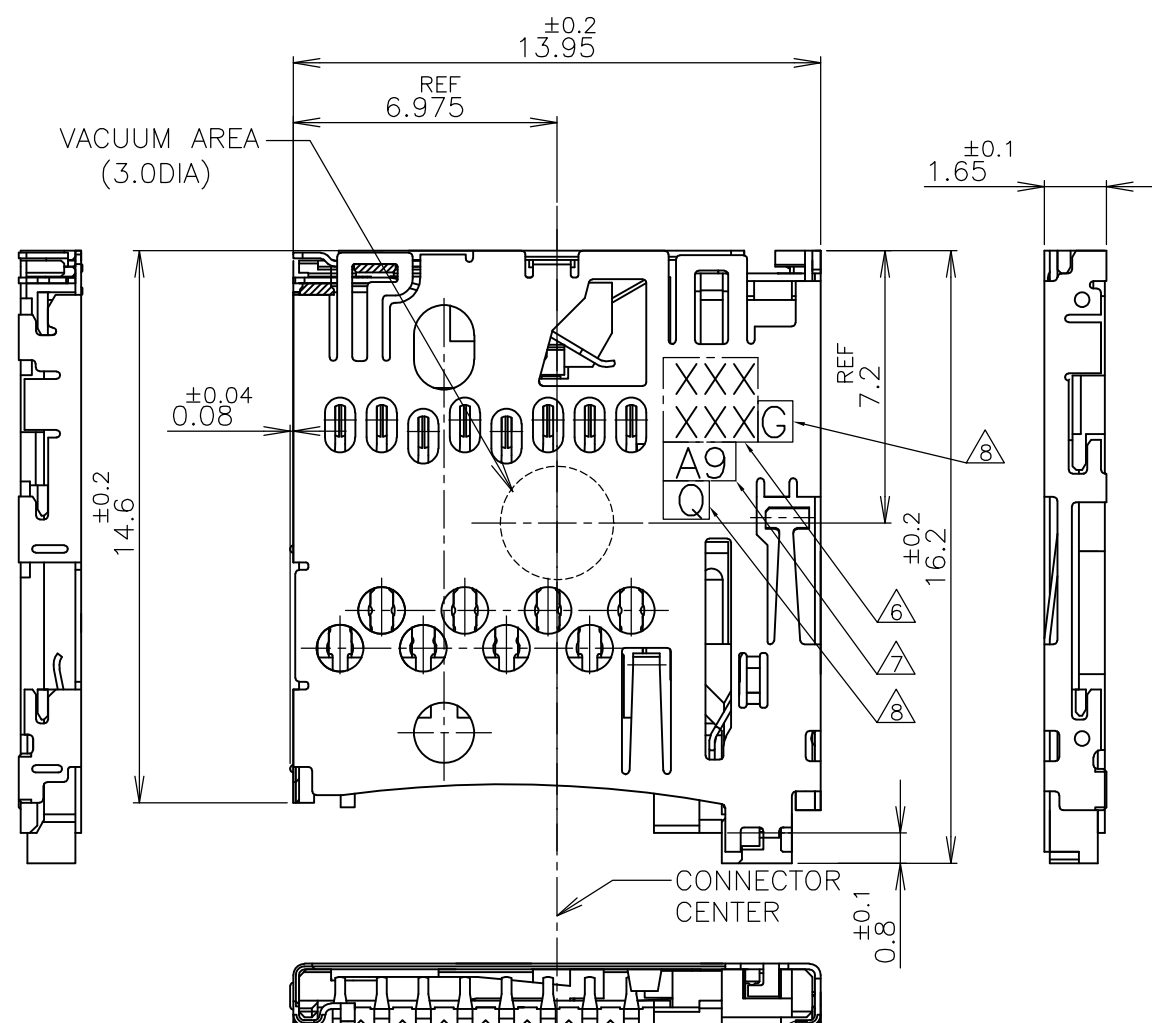

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Y.KUDO	21MAY2012	 TE Connectivity			
		CHK K.KOBAYASHI	21MAY2012				
DIMENSIONS: 単位： 耗 MM	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD T.KUSUHARA	21MAY2012	NAME 名称			
		PRODUCT SPEC 製品規格 108-78951	MICRO SD PUSH PUSH LOW PROFILE TYPE				
	0 PLC ± 0.3 1 PLC ± 0.3 2 PLC ± 0.3 3 PLC ± 0.3 4 PLC ± 0.3 ANGLES ± 1°	APPLICATION SPEC 取付適用規格	SIZE A3				
		WEIGHT 0.45g	CAGE CODE 00779	DRAWING NO 番号 C-2201778	RESTRICTED TO —		
MATERIAL 材料	FINISH 仕上	CUSTOMER DRAWING			SCALE 尺度 5:1	SHEET 1 OF 4	REV B

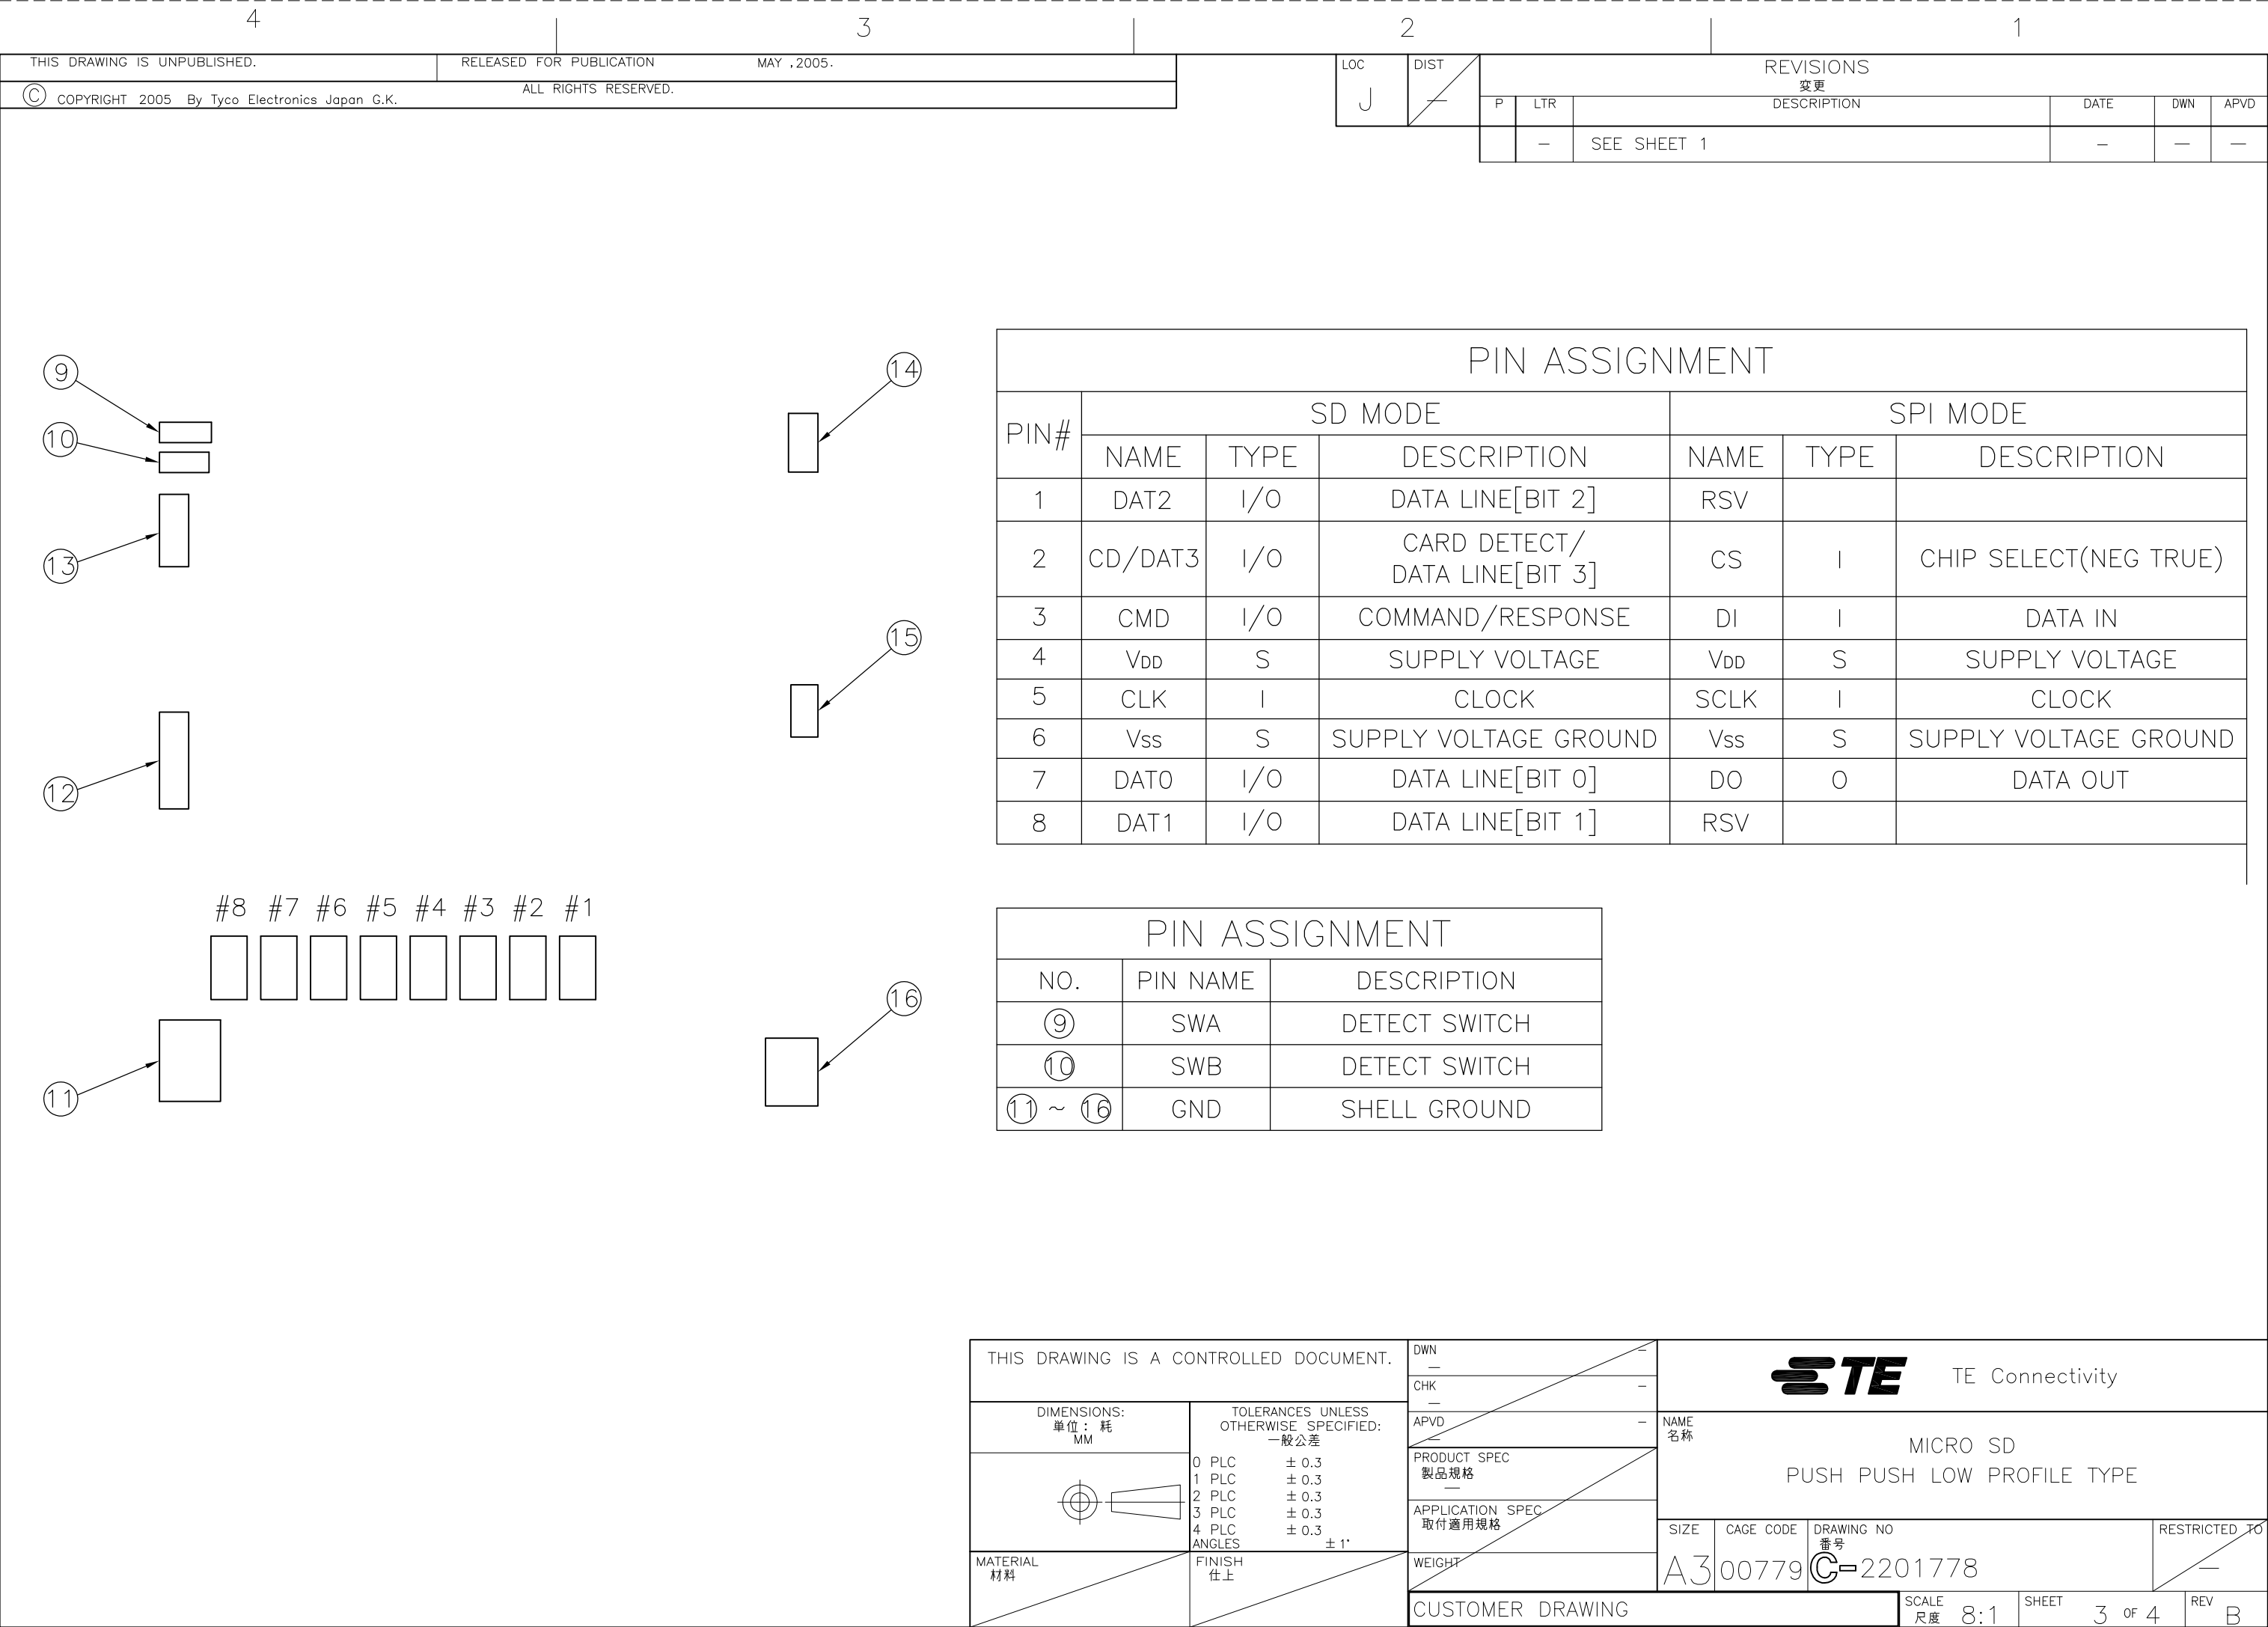

4




3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION MAY ,2005.
© COPYRIGHT 2005 By Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
J				変更	
				SEE SHEET 1	

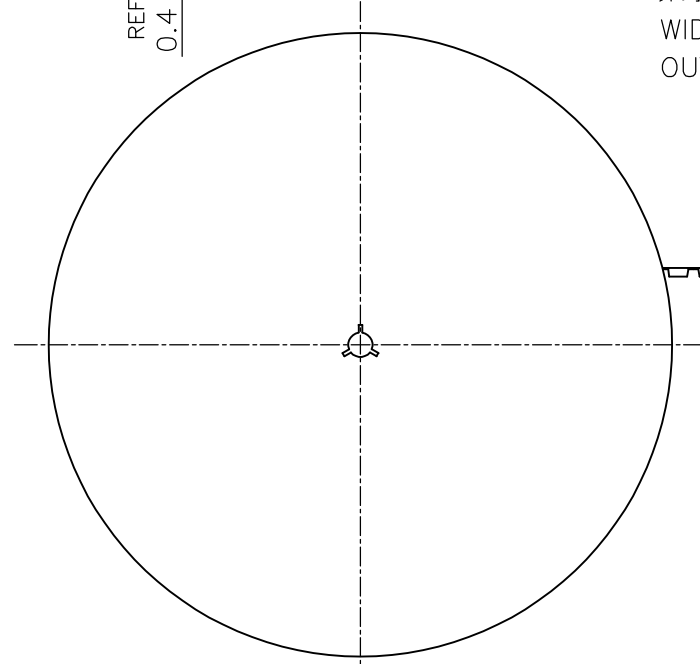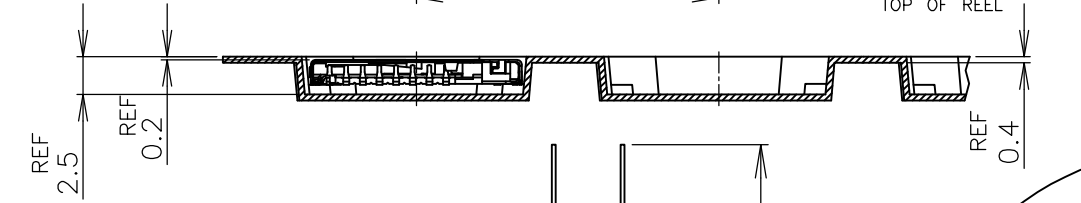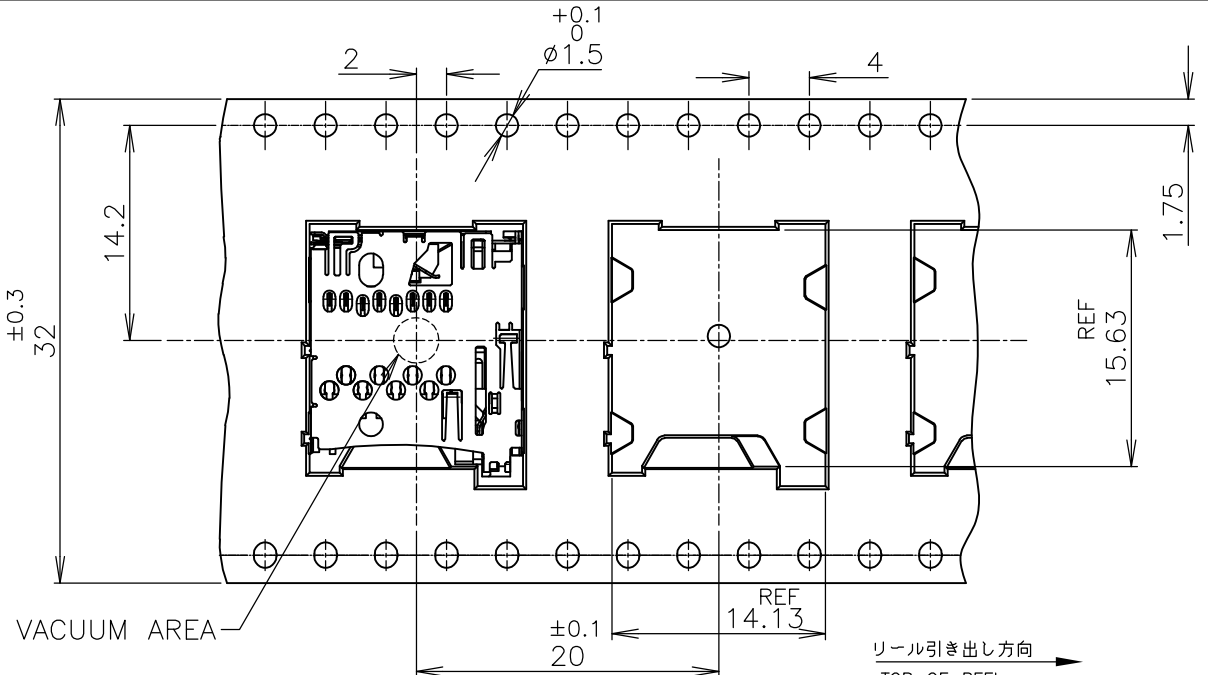

カバートープリーダー部
外周1巻
WIDE COVER TAPE AROUND
OUT PERIPHERY 1 TURN

剥離強度 0.1-1.3N MAX(300±10mm/min)
PEELING STRENGTH
剥離角度 165~180°
PEELING ANGLE

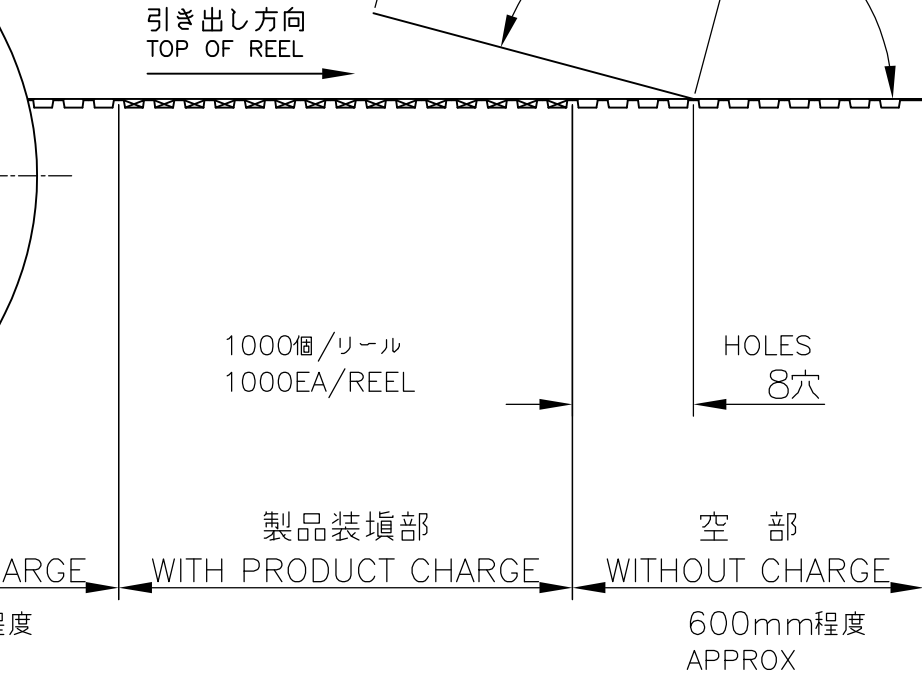

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	—	 TE Connectivity	
		CHK	—		
DIMENSIONS: 単位: 耗 MM		APVD	—	NAME 名称	
		PRODUCT SPEC 製品規格		MICRO SD PUSH PUSH LOW PROFILE TYPE	
		APPLICATION SPEC 取付適用規格			
MATERIAL 材料		WEIGHT		SIZE	CAGE CODE
				A3	00779
				DRAWING NO	番号
				C=2201778	RESTRICTED TO
					—
				SCALE 尺度	SHEET
				2:1	4 OF 4
				REV	B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2201778-1](#)